

LAVOR **PRO**

works for you

2017/18



Main catalogue 2017/18



www.lavorpro.com

a totally renewed website, full of useful information, with a new look, offering expanded and constantly updated contents: each product sheet contains in addition to texts, technical specifications, standard and optional accessories and also the possibility to download technical data sheet and instruction manual as well.



www.lavorpro.com

www.lavorpro.com

a website easy to explore and showing all the information about Lavor PRO products: it offers easy exploration and complete technical information. A website of modern concept helping our customer finding the necessary updated information about our products, easily and in real time. It offers complete product videos about machine running, machine use and plus of the main products of professional range: an additional very useful sales tool.



www.lavorpro.com

connecting to the Lavor PRO world is just a click away: complete information, products, videos and news available quickly and simply.

Watch the video on youtube:
www.youtube.com/lavortv
www.youtube.com/lavorpro





Headquarter

Lavorwash Group is worldwide leader in cleaning industry since 1975 and offers a wide and complete range of cleaning machinery suitable for any kind of applications, both indoor and outdoor relying on a forty-year experience. Over the years, Lavorwash has grown to become a specialist manufacturer of professional and household cleaning

systems, acquiring various leading brands and diversifying its own range to offer innovative products of excellence.



United Kingdom

Lavorwash Group has production plants in Italy and around the world and nowadays it employs over 300 staff and has around 200 associates, with branches in several countries around the world such as France, the United Kingdom, Spain, Poland, Brazil and China.



China



France

Lavorwash is a company with a consolidated reputation at national and international levels. It operates locally through branches located around the world, delivering its products through importers, distributors, agent network and direct relations with large retailing chains



Brazil




Spain



Poland



Lavorwash has an extensive R&D program aimed at improving the performance, durability and quality of its products, as well as developing new models, accessories and services to meet the needs of a market with a high rate of innovation and technological change. We research the development of new products, as well as the improvement and optimization of existing models. Lavorwash tests its research: technical staff employs sophisticated and modern technological systems; products are subjected to continual functional and performance tests.

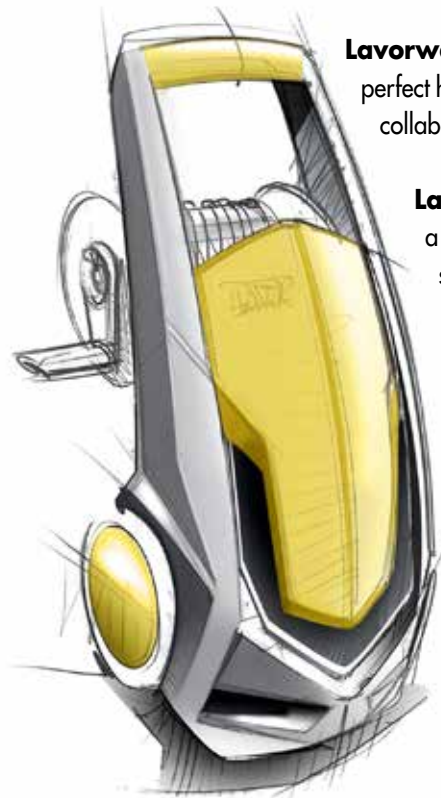

Lavorwash creates attractive products, by combining innovative styling, reliability and ease of use in perfect harmony. We understand the importance of ergonomics: designers and technicians work in close collaboration to manufacture products which are easy to use, safe, efficient and truly stylish.

Lavorwash has finalized advanced technologies, thanks to which every product is the result of a sophisticated manufacturing process. We use production lines equipped with automatic testing stations which immediately identify any problems or defects and the assembly systems ensure constant quality levels.

Lavorwash supplies efficient and powerful systems ensuring high performance and the long life of the machines.

Lavorwash pursues constant improvement and always sets itself new goals and targets. Wide-ranging and consolidated experience, constant commitment to research, advanced manufacturing processes and customer service are the features which have resulted in Lavorwash becoming a worldleader in cleaning systems.

Lavorwash offers its customers consolidated and reliable support, becoming the ideal partner for a successful future.

Investing in research and development also means making strides in terms of product quality and eco-sustainability. Whereas on the one hand, the improvement of our machines is aimed at meeting the practical needs of users, on the other hand this innovation is developed on the basis of an increasingly strong and shared environmental awareness. First of all, the use of high pressure cleaners allows for water savings of at least 80% when compared to a normal garden hose. Moreover, we developed vacuum cleaners using high efficiency motors to achieve top performances and reduce energy consumption by 50%.





Cold water high-pressure cleaners
AVANGARD LINE

Page **12**



Cold water high-pressure cleaners
HERITAGE LINE

Page **22**



Cold water high-pressure cleaners
with petrol engine

Page **32**



Hot water high-pressure cleaners

Page **38**



Hot water high-pressure cleaners
with diesel engine

Page **52**



Pumps - Motorpumps - Boilers

Page **62**



Dry vacuum cleaners

Page **70**



Wet & dry vacuum cleaners
COMMERCIAL LINE

Page **78**



Wet & dry vacuum cleaners
HEAVY DUTY LINE

Page **87**



Carpet cleaners

Page **94**



Industrial vacuum cleaners

Page **106**



Single disc machines

Page **110**



Walk-behind floor scrubber driers

Page **118**



Ride-on floor scrubber driers

Page **138**



Walk-behind sweepers

Page **150**



Ride-on sweepers

Page **157**



Steam generators

Page **162**



Chemicals & sprayers

Page **190**



Alaska XP Hyper KA XP LMX XP Arizona LP Hyper A LP Tucson LP Tucson XL LP Mystic R XP Columbia R LP Hyper C LP

Code	Model	Page	Operating pressure (max. pressure)	Operating pressure (max. pressure)	Delivery rate	Delivery rate	Absorbed power	RPM	Voltage	Max inlet water temperature	Weight with packaging	Packaging	Pieces for pallet
			bar (max bar)	psi (max psi)	l/h	GPM	W	RPM	V - Hz	°C	Kg/lbs	cm	n° (cm x cm)
8.669.0001	ALASKA 1409 XP	12	140 (180)	2030 (2610)	540	2.4	2800	2800	230-50	40	28/62	39x39 h 61	18 (120x80)
8.669.0003	HYPER KA 1409 XP	13	140 (180)	2030 (2610)	540	2.4	2800	2800	230-50	40	29/64	39x39 h 61	18 (120x80)
8.613.0001	LMX 1211 XP	14	50÷120 (150)	725÷1740 (2175)	660	2.91	3300	2800	230-50	40	35.5/78	60x37,5 h 72.5	12 (120x80)
8.613.0015	LMX 2007 XP	14	50÷200 (220)	725÷2900 (3190)	420	1.85	3300	2800	230-50	40	35.7/78	60x37,5 h 72.5	12 (120x80)
8.665.0101	ARIZONA R 1209 LP	15	120 (150)	1740 (2175)	510	2.23	2300	1450	230-50	40	30.5/67	60x38 h 72	12 (120x80)
8.665.0106	ARIZONA R 1311 LP	15	130 (150)	1885 (2175)	660	2.90	2900	1450	230-50	40	32.5/71	60x38 h 72	12 (120x80)
8.665.0117	HYPER A 1311 LP	16	130 (150)	1885 (2175)	660	2.90	2900	1450	230-50	40	32.5/71	60x38 h 72	12 (120x80)
8.665.0122	HYPER A 1510 LP	16	150 (160)	2175 (2320)	600	2.64	2900	1450	230-50	40	32.5/71	60x38 h 72	12 (120x80)
8.671.0001	TUCSON 1211 LP	17	30÷120 (150)	435÷1740 (2175)	660	2.91	3000	1450	230-50	40	38.6/85	61x40 h 91	9 (120x80)
8.671.0002	TUCSON 1509 LP	17	30÷150 (160)	435÷2175 (2320)	540	2.38	3000	1450	230-50	40	35/77	61x40 h 91	9 (120x80)
8.671.0003	TUCSON 1713 LP	18	30÷170	435÷2465	780	3.43	6000	1450	400-50	40	44/97	61x40 h 91	9 (120x80)
8.671.0004	TUCSON 2017 LP	18	30÷200	435÷2900	1000	4.49	9400	1450	400-50	40	46/101	61x40 h 91	9 (120x80)
8.672.0001	TUCSON XL 2015 LP	19	30÷200	435÷2900	900	3.96	7000	1450	400-50	40	66/145	61x40 h 91	9 (120x80)
8.672.0002	TUCSON XL 2021 LP	19	30÷200	435÷2900	1260	5.55	9400	1450	400-50	40	72.3/159	61x40 h 91	9 (120x80)
8.672.0003	TUCSON XL 2515 LP	19	30÷250	435÷3600	900	3.96	9400	1450	400-50	40	73/161	61x40 h 91	9 (120x80)
8.661.0001	MYSTIC R 1309 XP	22	130 (150)	1885 (2175)	540	2.38	2800	2800	230-50	40	32.5/71	60x38 h 72	12 (120x80)
8.668.0027C	BOLT 1510 LP	23	130 (150)	1885 (2175)	540	2.38	2800	2800	230-50	40	32/70	90x90 h 83	12 (120x80)
8.654.0071	COLUMBIA R 1211 LP	24	30÷120 (150)	435÷1812 (2175)	660	2.91	3000	1450	230-50	40	40/88	55x62 h 59	12 (120x100)
8.654.0073	COLUMBIA R 1515 LP	24	30÷150	435÷2175	900	3.96	5000	1450	400-50	40	54/118	55x62 h 59	12 (120x100)





MCHPV LP Ohio 3317 LP Utah-R 5015 LP Thermic 5H Thermic 6,5 Thermic 9L Thermic 10 D Thermic 11H Thermic 13H

Code	Model	Page	Operating pressure (max pressure)	Operating pressure (max pressure)	Delivery rate	Delivery rate	Absorbed power	RPM	Voltage	Max inlet water temperature	Weight with packaging	Packaging	Pieces for pallet
			bar (max bar)	psi (max psi)	l/h	GPM	W	RPM	V - Hz	°C	Kg/lbs	cm	n° (cm x cm)
8.654.0072	COLUMBIA R 2015 LP	24	30÷200	435÷2900	900	3.96	7000	1450	400 - 50	40	54/118	55x62 h 59	12 (120x100)
8.654.0097	COLUMBIA R Foam 1211 LP	25	30÷120 (150)	435÷1812 (2175)	660	2.91	3000	1450	230 - 50	40	40/88	55x62 h 59	12 (120x100)
8.654.0074	HYPER C 1211 LP	26	30÷125	435÷1812	660	2.91	3000	1450	230 - 50	40	60,5/133	55x62 h 59	12 (120x100)
8.654.0033	HYPER C 1515 LP	26	30÷150	435÷2175	900	3.96	5000	1450	400 - 50	40	50/110	55x62 h 59	12 (120x100)
8.654.0023	HYPER C 2015 LP	26	30÷200	435÷2900	900	3.96	7000	1450	400 - 50	40	59/130	55x62 h 59	12 (120x100)
8.654.0031	HYPER C 2021 LP	26	30÷200	435÷2900	1260	5.55	9400	1450	400 - 50	40	62/136	55x62 h 59	12 (120x100)
8.654.0053	HYPER C 2515 LP	26	30÷250	435÷3600	900	3.96	8500	1450	400 - 50	40	63/139	55x62 h 59	12 (120x100)
8.626.0101	MCHPV 1211 LP	27	30÷120(150)	435÷1740(2175)	660	2.91	3000	1450	230 - 50	40	44/97	75x50 h 35	9 (120x80)
8.626.0002	MCHPV 1515 LP	27	30÷150	435÷2175	900	3.96	5000	1450	400 - 50	40	45/99	75x50 h 35	9 (120x80)
8.626.0003	MCHPV 2015 LP	27	30÷200	435÷2900	900	3.96	7000	1450	400 - 50	40	48/105	75x50 h 35	9 (120x80)
8.626.0004	MCHPV 2021 LP	27	30÷200	435÷2900	1260	5.55	9400	1450	400 - 50	40	60/132	75x50 h 35	9 (120x80)
8.651.0101	OHIO 3317 LP	28	30÷350	435÷5076	1020	4.49	11000	1450	400 - 50	40	147/324	113x71 h 111	1 (120x80)
8.632.0001	UTAH R 5015 LP	29	30÷500	435÷7250	900	3.96	15000	1450	400 - 50	40	281/614	124x84 h 112	1 (120x80)
8.601.0107	THERMIC 5H	30	30÷160	435÷2320	570	2.51	5 hp	3000	-	40	37,5/83	54,5x54,5 h 69,5	8 (120x80)
8.601.0175C	THERMIC 6,5	31	30÷180	435÷2610	690	2.77	6,5hp	3600	-	40	38/84	47x57 h57	12 (120x100)
8.601.0134C	THERMIC 9 L	32	30÷200	435÷2900	780	3.44	9 hp	3400	-	40	53/116	70x57 h 70	9 (120x80)
8.601.0111	THERMIC 10 D	33	30÷180	435÷2610	1020	4.49	10 hp	1600	-	40	95/209	113x71 h 110	1 (120x80)
8.601.0115	THERMIC 11 H	34	30÷200	435÷2900	1080	4.76	11 hp	1700	-	40	95/209	103x73 h 100	1 (120x80)
8.601.0133	THERMIC 13 H	35	30÷250	435÷3625	1080	4.76	13cv	1700	-	40	95/209	103x73 h 100	1 (120x113)



VANGUARD LINE

Vanguard line is our line of products aimed to professional customers who seek , in addition to the robustness that distinguishes the LAVORPRO brand , design and ergonomics result of years of R & D study.

Each model is equipped with large wheels for easy transport, accessories storage facility, plastic shockproof structures and quiet operation.

The range includes two models 2800 rpm (Alaska and LMX) and 3 models 1450 rpm (Arizona, Tucson and Tucson XL) meeting all customer needs.

Being Manufacturers: from experience to knowledge

In the high-pressure cleaners market companies are divided in those who buy components to assemble products and manufacturers, who have a continuous R&D on all product components.

Lavorwash manufactures all the high-pressure cleaners components entirely and this allows: to spread product knowledge, culture and experience inside the company; to check the entire manufacturing cycle; to adopt possible improvements immediately; better sensitivity to market request adjusting product range design in real time.

What high pressure cleaner? Is it better pressure or delivery rate?

The right criteria to define the high-pressure cleaner performances is the washing effectiveness. The elements that influence this value are: delivery rate (water volume processed by the pump in a unity of time) and pressure (l/h water power on a surface). The higher the delivery rate, the faster the washing



phase (less rinsing time); the higher the pressure, the deeper the washing (better dirt degreasing). It is often emphasized the pressure only (also because the pump size and the consequent manufacturing cost are cheaper), but delivery rate is as important as pressure.

What pump? Is it better a linear (crankshaft) or an axial one?

It does not exist a winning technology, because both solution can provide same performances and

lifetime. What determines the pump quality is the quality of the project itself (linear or axial) and of the components used; for this reason Lavorwash decided to develop both technologies, taking into consideration a design that grants margin of safety and reliability.



CRANKSHAFT

• **Linear pump:**

The movement of the (3) pistons occurs through a system of connecting rods and crankshaft. The longitudinal axle of the pistons (placed at the same level or linear) is perpendicular to the motor rotation axle. It is more versatile to bear high delivery rates (from 21 l/min) and it has a better self priming.



• **Low voltage and delayed Total Stop:**

To avoid quick and multiple start and shut down of the motor/pump group whenever the gun trigger is pulled and released, this disposal delays of about 15 seconds the machine shut down. Prevention, energy saving, top safety and pump longer life.



• **Motor low rotation speed:**

The electric motor transfers the same number of revolutions to the pump. With a 4 poles motor there is a lower rotation speed of the components (1400 RPM in case of 50Hz or 1750 RPM in case of 60 Hz) granting longer pump life. Extending lifetime solution.



WATER COOLING

• **Water cooled motor:**

Water flows through the S. S. coil around the motor, this allows a better thermal exchange (and so a cooling) than air also in those countries where inlet water could reaches 60°C. This allows a drop in operating temperature of the motor and pump mechanical elements, granting a better reliability and longer life.



• **Total Stop:**

Releasing the gun trigger the pump stops automatically avoiding element damages during the by-pass phase. Pulling the trigger, the high-pressure cleaner starts automatically. Max pump protection.

Alaska XP



T.S. *Total Stop*

Standard equipment:

- 6.001.0107 Gun M22



- 6.002.0322 Lance M22



- 5.012.0478 High pressure nozzle set



- 4.618.0128 High pressure hose 8 m



- Power cable 5 m

Optional:

- 3.749.0472 ROTOX head

Equipped with:

- Three steel pistons, brass axial pump head with built-in by-pass valve.
- Total Stop. • Suction and delivery S. S. valves. • Detergent built-in tank for indirect suction. • Power cable holder. • Accessory holder. • Ergonomic handle.
- 1l detergent tank.

	Alaska 1409 XP
code	8.669.0001
operat. pressure/max	140/180 bar - 2030/2610 psi
delivery rate	540 l/h - 2.4 GPM
abs. power/voltage	2800 W - 230 V ~ 50 Hz - 1 ph
Motorpump type/RPM	MPBX1/2800 RPM
max. water inlet temperature	40 °C
dimension/weight	35 x 40 h 96 - 28 Kg - 61,6 lbs



NEW

Hyper KA XP


**With hose-reel
in pressure**

Standard equipment:

- 3.700.0036 Gun M22 - 3/8.




- 3.701.0027 Lance M22 high/low pressure



- 3.103.0048 Nozzle type 035



- 6.602.0056 ROTOX Lance



- 4.618.0090 High pressure hose R1 8 m



- Power cable 5 m

T.S. Total Stop

Equipped with:

- Three steel pistons, brass axial pump head with built-in by-pass valve.
- Total Stop.
- Suction and delivery S. S. valves.
- Detergent built-in tank for indirect suction.
- Power cable holder.
- Hose reel in pressure.
- Accessory holder.
- Ergonomic handle.
- 1l detergent tank.

Hyper KA 1409 XP	
code	8.669.0006
operat. pressure/max	140/180 bar - 2030/2610 psi
delivery rate	540 l/h - 2.4 GPM
abs. power/voltage	2800 W - 230 V ~ 50 Hz - 1 ph
Motorpump type/RPM	MPBX1/2800 RPM
max. water inlet temperature	40 °C
dimension/weight	35 x 40 h 96 - 28 Kg - 61,6 lbs

LMX XP

T.S. Total Stop




Standard equipment:

- 3.700.0036 Gun M22 - 3/8.



- 3.701.0027 Lance M22 high/low pressure (mod. 1211 XP)



- 6.602.0026 Lance M22 high/low pressure with nozzle (mod. 2007 XP)



- 3.103.0050 Nozzle type 045 (mod. 1211 XP)



- 4.618.0053 High pressure hose 10 m



- Power cable 5 m

Equipped with:

- Three ceramic coated pistons, brass axial pump head with built-in by-pass valve.
- Total Stop. • Suction and delivery S. S. valves. • Detergent built-in tank for indirect suction. • Pressure regulator. • Glycerine pressure gauge. • Hose reel. • Accessory holder. • Ergonomic handle. • 4l detergent tank.

	LMX 1211 XP	LMX 2007 XP
code	8.613.0001	8.613.0015
operat. pressure/max	120/150 bar-1740/2175 psi	200/220 bar-2900/3190 psi
delivery rate	660 l/h-2.91 GPM	420 l/h-1.85 GPM
abs. power/voltage	3300W - 230V~50Hz 1 ph	3300W - 230V~50Hz 1 ph
motorpump type/RPM	MPBX2/2800 RPM	MPBX2/2800 RPM
max. water inlet temperature	40 °C	40 °C
dimension/weight	59x37x87cm / 28 Kg - 61,6 lbs	59x37x87cm / 28 Kg - 61,6 lbs

Arizona LP

NEW



T.S. Total Stop

OPTIONAL
Available only versions:
with hose reel

Code: 8.665.0110



Standard equipment:

- 6.001.0107 Gun M22



- 6.002.0322 Lance M22.



- 5.012.0281 High pressure nozzle set (mod. 1209 LP)
- 5.012.0401 High pressure nozzle set (mod. 1311 LP)



- 4.618.0128 High pressure hose 8 m



- Power cable 5 m

Available versions:

Code: **8.665.0110**

Arizona 1311 LP **with hose reel** (10 m high pressure hose code 4.618.0053)

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection.
- Three ceramic coated pistons, brass linear pump head with built-in by-pass valve.
- Suction and delivery S. S. valves.
- Detergent built-in tank for indirect suction.
- Pressure regulator.
- Glycerine pressure gauge.
- Hose reel (**optional**).
- Accessory holder.
- Hose-holder.
- Ergonomic handle.
- 4l detergent tank.

	Arizona 1209 LP	Arizona 1311 LP
code	8.665.0101	8.665.0106
operat. pressure/max	120/150 bar-1740/2175 psi	130/150 bar-1885/2175 psi
delivery rate	510 l/h-2.23 GPM	660 l/h-2.90 GPM
abs. power/voltage	2300W - 230V~50Hz 1 ph	2900W - 230V~50Hz 1 ph
motorpump type/RPM	MP4/1450 RPM	MP4/1450 RPM
max. water inlet temperature	40 °C	40 °C
dimension/weight	59x37x87cm / 26 Kg - 57 lbs	59x37x87cm / 28 Kg - 61 lbs

Hyper A LP

NEW



Standard equipment:

- 3.700.0036 Gun M22 - 3/8



- 3.701.0027 Lance M22 high/low pressure



- 3.103.0050 Nozzle type 045 (mod. 1311 LP)
- 3.103.0047 Nozzle type 030 (mod. 1510 LP)



- 4.618.0049 High pressure hose 8 m



- Power cable 5 m

T.S. Total Stop

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection.
- Three ceramic coated pistons, brass linear pump head with built-in by-pass valve.
- Suction and delivery S. S. valves.
- Detergent built-in tank for indirect suction.
- Pressure regulator.
- Glycerine pressure gauge.
- Accessory holder.
- Hose-holder.
- Ergonomic handle.
- 4l detergent tank.

	Hyper A 1311 LP	Hyper A 1510 LP
code	8.665.0117	8.665.0122
operat. pressure/max	130/150 bar-1885/2175 psi	150/160 bar-2175/2320 psi
delivery rate	660 l/h-2.90 GPM	600 l/h-2.64 GPM
abs. power/voltage	2900W - 230V~50Hz 1 ph	2900W - 230V~50Hz 1 ph
motorpump type/RPM	MP4/1450 RPM	MP4/1450 RPM
max. water inlet temperature	40 °C	40 °C
dimension/weight	59x37x87cm / 28 Kg - 61 lbs	59x37x87cm / 28 Kg - 61 lbs

Tucson LP single phase



NEW



OPTIONAL
Available only versions:
with hose reel

Code: 8.671.0005

T.S. Total Stop

Standard equipment:

- 3.700.0036 Gun M22 - 3/8.



- 3.701.0027 Lance M22 high/low pressure



- 3.103.0050 Nozzle type 045 (mod. 1211 LP)
- 3.103.0047 Nozzle type 030 (mod. 1509 LP)



- 4.618.0049 High pressure hose 8 m



- Power cable 5 m

Available versions:

Code: **8.671.0005**

Tucson 1509 LP **with hose reel** (10 m high pressure hose code 4.618.0054)

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection.
- Three ceramic coated pistons, brass linear pump head with built-in by-pass valve.
- Suction and delivery S. S. valves.
- Detergent built-in tank for indirect suction (2,8 lt.).
- Pressure regulator.
- Glycerine pressure gauge.
- Hose-reel (**optional**).

	Tucson 1211 LP	Tucson 1509 LP
code	8.671.0001	8.671.0002
operat. pressure/max	120/150 bar-1740/2175 psi	150/160 bar-2175/2320 psi
delivery rate	660 l/h-2.91 GPM	540 l/h-2.37 GPM
abs. power/voltage	3000W - 230V~50Hz 1 ph	3000W - 230V~50Hz 1 ph
motorpump type/RPM	MP4/1450 RPM	MP4/1450 RPM
max. water inlet temperature	40 °C	40 °C
dimension/weight	76x41x75cm / 33 kg - 72,6 lbs	76x41x75cm / 33 kg - 72,6 lbs

Tucson LP three phase



NEW



OPTIONAL
Available only versions:
with hose reel

Code: 8.671.0006
Code: 8.671.0007




Standard equipment:

- 3.700.0030 Gun M22 - 3/8 with rotating coupling).



- 3.701.0027 Lance M22 high/low pressure



- 3.103.0053 Nozzle type 060 (mod. 1713 LP)
- 3.103.0052 Nozzle type 045 (mod. 2017 LP)



- 4.618.0143 High pressure hose 10 m



- Power cable 5 m

Available versions:

Code: **8.671.0006**
Tucson 1713 LP **with hose reel** (10 m high pressure hose code 4.618.0054)

Code: **8.671.0007**
Tucson 2017 LP **with hose reel** (10 m high pressure hose code 4.618.0054)

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection and water cooling
- Three ceramic coated pistons (Tucson 2017). Three full ceramic pistons (Tucson 1713).
- Brass linear pump head with built-in by-pass valve.
- Suction and delivery S. S. valves.
- Low voltage and delayed Total Stop
- Detergent built-in tank for indirect suction (2,8 lt.).
- Pressure regulator.
- Glycerine pressure gauge.
- Hose-reel (**optional**).

	Tucson 1713 LP	Tucson 2017 LP
code	8.671.0003	8.671.0004
operat. pressure	170 bar-2465 psi	200 bar-2900 psi
delivery rate	780 l/h-3.43 GPM	1000 l/h-4.4 GPM
abs. power/voltage	5200W - 400V~50Hz 3 ph	7500W - 400V~50Hz 3 ph
motorpump type/RPM	MPW4/1450 RPM	MPW4/1450 RPM
max. water inlet temperature	40 °C	40 °C
dimension/weight	76x40x75cm / 42 kg - 92,4 lbs	76x40x75cm / 44 kg - 96,8 lbs

Tucson XL LP



NEW




Standard equipment:

- 3.700.0030 Gun M22 - 3/8 with rotating coupling).



- 3.701.0027 Lance M22 high/low pressure



- 3.103.0055 Nozzle type 070 (mod. 2021 LP)
- 3.103.0049 Nozzle type 040 (mod. 2515 LP)



- 4.618.0054 High pressure hose 10 m



- Power cable 5 m

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection and water cooling.
- Three full ceramic pistons, brass linear pump head with by-pass valve.
- Low voltage and delayed Total Stop.
- Suction and delivery S. S. valves.
- Detergent built-in tank for indirect suction (2,8 lt.).
- Pressure regulator.
- Glycerine pressure gauge.

Available: May 2017

	Tucson XL 2015 LP	Tucson XL 2021 LP	Tucson XL 2515 LP
code	8.672.0001	8.672.0002	8.672.0003
operat. pressure	200 bar-2900 psi	200 bar-2900 psi	250 bar-3600 psi
delivery rate	900 l/h-3.96 GPM	1260 l/h-5.55 GPM	900 l/h-3.96 GPM
abs. power/voltage	7000W - 400V~50Hz 3ph	9400W - 400V~50Hz 3ph	9400W - 400V~50Hz 3ph
pump type/RPM	MPW5/1450 RPM	MPW5/1450 RPM	MPW5/1450 RPM
max. water inlet temperature	40 °C	40 °C	40 °C
dimension/weight	61x40x91cm / 69 Kg - 152 lbs	61x40x91cm / 70 Kg - 154 lbs	61x40x91cm / 70 Kg - 154 lbs

HERITAGE LINE

"Less is more " is the philosophy that best characterizes our HERITAGE range.

All Heritage products are addressed to customers who want a high pressure cleaner with no compromises, equipped with metal trolley able to withstand shock and displacements.

With Heritage we were able to combine the best of our technology and simple and durable frames, suitably treated to resist the weather condition and rustproof. Heritage provides a 2800 rpm model (MYSTIC) and four 1450 rpm models (COLUMBIA R , Hyper C , Ohio and Utah), single-phase three-phase stationary pressure washers with galvanized frame or stainless steel AISI 304 (MCHPV and MCHPX) and an entire range with combustion engines up to 13 horses.



Being Manufacturers: from experience to knowledge

In the high-pressure cleaners market companies are divided in those who buy components to assemble products and manufacturers, who have a continuous R&D on all product components.

Lavorwash manufactures all the high-pressure cleaners components entirely and this allows: to spread product knowledge, culture and experience inside the company; to check the entire manufacturing cycle; to adopt possible improvements immediately; better sensitivity to market request adjusting product range design in real time.

What high pressure cleaner? Is it better pressure or delivery rate?

The right criteria to define the high-pressure cleaner performances is the washing effectiveness. The elements that influence this value are: delivery rate (water volume processed by the pump in a unity of time)

and pressure (l/h water power on a surface). The higher the delivery rate, the faster the washing phase (less rinsing time); the higher the pressure, the deeper the washing (better dirt degreasing).

It is often emphasized the pressure only (also because the pump size and the consequent manufacturing cost are cheaper), but delivery rate is as important as pressure.

What pump? Is it better a linear (crankshaft) or an axial one?

It does not exist a winning technology, because both solution can provide same performances and lifetime. What determines the pump quality is the quality of the project itself (linear or axial) and of the components used; for this reason Lavorwash decided to develop both technologies, taking into consideration a design that grants margin of safety and reliability.



CRANKSHAFT

• **Linear pump:**

The movement of the (3) pistons occur through a system of connecting rods and crankshaft. The longitudinal axle of the pistons (placed at the same level or linear) is perpendicular to the motor rotation axle. It is more versatile to bear high delivery rates (from 21 l/min) and it has a better self priming.



WATER COOLING

• **Water cooled motor:**

Water flows through the S. S. coil around the motor, this allows a better thermal exchange (and so a cooling) than air also in those countries where inlet water could reaches 60°C. This allows a drop in operating temperature of the motor and pump mechanical elements, granting a better reliability and longer life.



• **Total Stop:**

Releasing the gun trigger the pump stops automatically avoiding element damages during the by-pass phase. Pulling the trigger, the high-pressure cleaner starts automatically. Max pump protection.



• **Low voltage and delayed Total Stop:**

To avoid quick and multiple start and shut down of the motor/pump group whenever the gun trigger is pulled and released, this disposal delays of about 15 seconds the machine shut down. Prevention, energy saving, top safety and pump longer life.



Thermal Valve

• **Thermal valve:**

When the gun trigger is released, the same water flows through the pump (by-pass) and it overheats and sooner or later this damages the valve seals. With this completely mechanical system, the thermal valve checks the temperature in the pump, opening/closing the by-pass circuit letting new and fresh water flow inside before the elements are damaged. Simple solution without electronic devices.



1450 RPM

• **Motor low rotation speed:**

The electric motor transfers the same number of revolutions to the pump. With a 4 poles motor there is a lower rotation speed of the components (1400 RPM in case of 50Hz or 1750 RPM in case of 60 Hz) granting longer pump life. Extending lifetime solution.



• **Pressure accumulator:**

The release of the gun trigger produces a strong counterstroke in the pump. This device amortizes this power with great benefit for the pump components and for the user, because it removes all the vibrations.



FOAM SYSTEM

• **Foam system:**

the machine is equipped with connection for compressed air and pressure gauge for foam cleaning. Using the lance with the hose a thick foam can be produced that will stay on the dirty components, giving more effectiveness to the detergent.

Mystic-R XP



T.S. Total Stop

Equipped with:

- Three ceramic coated pistons, brass axial pump head with built-in by-pass valve.
- Suction and delivery S. S. valves. • Detergent built-in tank for indirect suction.
- Pressure regulator. • Glycerine pressure gauge. • Hose holder. • Accessory holder.
- Ergonomic handle.

Standard equipment:

- 6.001.0107 Gun M22



- 6.002.0322 Lance M22.



- 5.012.0478 High pressure nozzle set



- 4.618.0128 High pressure hose 8 m



- Power cable 5 m

Optional:

- 6.608.0071 High-pressure wall mount hose reel (hose not included)
- 3.749.0472 Rotox nozzle head

Mystic-R 1409 XP

code	8.661.0701
operat. pressure/max	140/180 bar - 2030/2610 psi
delivery rate	540 l/h - 2.4 GPM
abs. power/voltage	2800 W - 230 V ~ 50 Hz - 1 ph
pump type/RPM	MPBX1/2800 RPM
max. water inlet temperature	40 °C
dimension/weight	43x50x85cm / 28 Kg - 61,6 lbs

Bolt LP

NEW



T.S. Total Stop

Standard equipment:

- 6.001.0107 Gun M22



- 6.602.0057 Lance M22.



- 4.618.0188 High pressure hose R1 10 m



- 3.102.0011 water filter

- Power cable 5 m

Equipped with:

- Three ceramic coated pistons, brass linear pump head with built-in by-pass valve.
- Total stop • Suction and delivery S. S. valves. • Integrated detergent suction with external suction probe • Pressure regulator. • Glycerine pressure gauge.
- Accessory holder. • Ergonomic handle.

Bolt 1510 LP

code	8.668.0027C
operat. pressure	150 bar-2175 psi
delivery rate	540 l/h-2,37 GPM
abs. power/voltage	2800W - 230V~50Hz 1 ph
pump type/RPM	MP4/1450 RPM
max. water inlet temperature	40 °C
dimension/weight	43x50x85cm / 36 Kg - 79,3 lbs

Columbia-R LP



Models: 1515 LP - 2015 LP



Models: 1211 LP



Models: 1515 LP/2015 LP

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection and water cooling (three phase models).
- Three ceramic coated pistons (1 ph), full ceramic pistons (3 ph), brass linear pump head with built-in by-pass valve.
- Low voltage and delayed Total Stop (three phase model).
- Suction and delivery S. S. valves.
- Integrated detergent suction with external suction probe.
- Pressure regulator.
- Glycerine pressure gauge.
- Hose reel (**optional**).
- Accessory holder.
- Power cable holder.
- Steel frame.
- Steel cover.

Standard equipment:

- 3.700.0036 Gun M22 - 3/8" (mod 1211 LP).



- 3.700.0030 Gun M22 - 3/8" with rotating coupling (mod. 1515 LP/2015 LP).



- 3.701.0027 Lance M22 high/low pressure



- 3.103.0050 Nozzle type 045 (mod. 1211 LP/2015 LP)

- 3.103.0053 Nozzle type 060 (mod. 1515 LP)



- 4.618.0049 High pressure hose 8 m (mod. 1211 LP)

- 4.618.0143 High pressure hose 10 m (mod. 1515 LP/2015 LP).



- Power cable 5 m (mod. 1211 LP)

- Power cable 6 m (mod. 1515 LP - 2015 LP)

Optional:

- 6.608.0068 High-pressure hose reel (hose not included)



	Columbia R 1211 LP	Columbia R 1515 LP	Columbia R 2015 LP
code	8.654.1071	8.654.1073	8.654.1072
operat. pressure/max	120/150 bar-1740/2175 psi	150 bar-2175 psi	200 bar-2900 psi
delivery rate	660 l/h-2.91 GPM	900 l/h-3.96 GPM	900 l/h-3.96 GPM
abs. power/voltage	3000W - 230V~50Hz 1 ph	5000W - 400V~50Hz 3 ph	7000W - 400V~50Hz 3 ph
motorpump type/RPM	MP4/1450 RPM	MPW4/1450 RPM	MPW4/1450 RPM
max. water inlet temperature	40 °C	40 °C	40 °C
dimension/weight	50x90x83cm / 37 kg - 81 lbs	50x90x83cm / 49 Kg - 108 lbs	50x90x83cm / 51 Kg - 112 lbs

Columbia-R FOAM

NEW



WITH INTEGRATED FOAMING SYSTEM

Standard equipment:


- 3.700.0036 Gun M22 - 3/8 (only version 1211)



- 3.700.0030 Gun M22 - 3/8 with rotating coupling



- 3.701.0027 Lance high/low pressure M22



- 3.103.0050 High pressure nozzle



- 6.402.0109 Detergent lance



- 3.099.0705
8 m detergent hose for lance



- 4.618.0049 High pressure hose 8 m (only version 1211)



- 4.618.0143 High pressure hose 10 m

WATER COOLING
Models:
2015 LP

FOAM SYSTEM

T.S. Total Stop 24V
Only version
2015

T.S. Total Stop

1450 RPM



Columbia R Foam 2015 LP

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection
- Pump with nickel plated brass head with three ceramic pistons, by-pass valve, high temperature resistant seals • Total Stop and water cooling (three phase models)
- Suction and delivery stainless steel valves • Pressure regulator. • Glycerine pressure gauge • Galvanized steel frame • Stainless steel cover • **Provided with compressed air connection regulator and pressure gauge perform dense foam cleaning** • By using the detergent lance with 8 meters hose it will be produced a dense foam that will remain attached to the parts to be cleaned, giving more effectiveness to the detergent's action.



- Integrated elastic joint, for best pump coupling (only version 2015)



Columbia R Foam 1211 LP

	Columbia R Foam 1211 LP	Columbia R Foam 2015 LP
Code	8.654.1097	8.654.0111
Operat. pressure	120 bar	200 bar
Delivery rate	660 l/h	900 l/h
Absorbed power/voltage	3000 W - 230V~50Hz 1 ph	7000W - 400V~50Hz
Motorpump type/RPM	MP4 Ni/1450 RPM	MPWJ5/1450 RPM
Detergent pump	2 x 15 bar - 48 W	2 x 15 bar - 48 W
Dimension/weight	50x90x83cm / 42 Kg - 92 lbs	50x90x83cm / 56 Kg - 123 lbs

NEW

HyperC

GUARANTEED



T.S.
Total Stop **24V**

WATER COOLING



Standard equipment:

- 3.700.0036 Gun M22 - 3/8" (mod 1211 LP).
- 3.700.0030 Gun M22 - 3/8" with rotating coupling (mod. 1515 LP/2015 LP/2021 LP/2515 LP).
- 3.701.0027 Lance M22 high/low pressure
- 3.103.0050 Nozzle type 045 (mod. 1211 LP /2015 LP)
- 3.103.0053 Nozzle type 060 (mod. 1515 LP)
- 3.103.0055 Nozzle type 070 (mod. 2021 LP)
- 3.103.0049 Nozzle type 040 (mod. 2515 LP)



- 4.618.0143 High pressure hose 10 m
- Power cable 5 m



- Power cable 5 m

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection and water cooling.
- Three ceramic pistons, brass linear pump head with built-in by-pass valve.
- Integrated elastic joint, for best pump coupling.
- Low voltage and delayed Total Stop.
- Suction and delivery S. S. valves.
- Integrated detergent suction with external suction probe.
- Pressure regulator.
- Glycerine pressure gauge.
- Hose reel (**optional**).
- Steel frame.
- Stainless Steel covers.



Integrated elastic joint, for best pump coupling (except model 1211).

Optional:

- 6.608.0068 High-pressure hose reel (hose not included)



	Hyper C 1211 LP	Hyper C 1515 LP	Hyper C 2015 LP	Hyper C 2021 LP	Hyper C 2515 LP
code	8.654.0074	8.654.0033	8.654.0023	8.654.0031	8.654.0053
operat. pressure	125 bar-1812 psi	150 bar-2175 psi	200 bar-2900 psi	200 bar-2900 psi	250 bar-3600 psi
delivery rate	660 l/h-2.91GPM	900 l/h-3.96 GPM	900 l/h-3.96 GPM	1260 l/h-5.55 GPM	900 l/h-3.96 GPM
abs. power/voltage	3000W - 230V~50Hz 1ph	5000W - 400V~50Hz 3ph	7000W - 400V~50Hz 3ph	9400W - 400V~50Hz 3ph	8500W - 400V~50Hz 3ph
pump type/RPM	MPW5/1450 RPM	MPWJ5/1450 RPM	MPWJ5/1450 RPM	MPWJ5/1450 RPM	MPWJ5/1450 RPM
max. water inlet temperature	40 °C	40 °C	40 °C	40 °C	40 °C
dimension/weight	50x90x83cm / 42 Kg - 92 lbs	50x90x83cm / 54 Kg - 119 lbs	50x90x83cm / 56 Kg - 123 lbs	50x90x83cm / 58 Kg - 128 lbs	50x90x83cm / 59 kg - 130 lbs

MCHP LP



Only 2021 LP



T.S. Total Stop

Models: 1211 LP

T.S. Total Stop 24V

Models: 1515 LP/2015 LP
2021 LP



Models: 1515 LP/2015 LP
2021 LP

Optional: Recommended accessories:

- 6.605.0213 **For food industry:**
3.700.0022 Gun + 3.701.0020 S.S lance +
4.618.0058 10mt Hose AP food + 3.100.0043
Hose adapter /Gun



- 6.605.0214 **For industry:**
3.700.0030 Gun + 3.701.0015 lance +
4.618.0143 10mt Hose AP



- 3.103.0148 - Nozzle 045 (mod. 1211 LP)
- 3.103.0150 - Nozzle 060 (mod. 1515 LP)
- 3.103.0148 - Nozzle 045 (mod. 2015 LP)
- 3.103.0175 - Nozzle 075 (mod. 2021 LP)



- 6.608.0030 - Brackets for wall mounting

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection and water cooling (three phase models).
- Three ceramic coated pistons (1 ph), full ceramic pistons (3 ph), brass linear pump head with built-in by-pass valve.
- Integrated elastic joint, for best pump coupling (three phase models).
- Low voltage and delayed Total Stop (three phase models).
- Suction and delivery S. S. valves.
- Detergent built-in tank for indirect suction.
- Pressure regulator. Glycerine pressure gauge.
- Pressure accumulator (only model 2021).
- Wall mount support (optional code 6.608.0030).
- Galvanized steel frame.
- Plastic covers models MCHPV.



Integrated elastic joint, for best pump coupling (except model 1211).

Available:

- 8.626.0137** - MCHPX 1211 LP with stainless steel frame and fairings
- 8.626.0038** - MCHPX 2015 LP with stainless steel frame and fairings



	MCHPV 1211 LP	MCHPV 1515 LP	MCHPV 2015 LP	MCHPV 2021 LP
code	8.626.0101	8.626.0002	8.626.0003	8.626.0004
operat. pressure/max	120 bar-1740 psi	150 bar-2175 psi	200 bar-2900 psi	200 bar-2900 psi
delivery rate	660 l/h-2.91GPM	900 l/h-3.96 GPM	900 l/h-3.96 GPM	1260 l/h-5.55 GPM
abs. power/voltage	3000W - 230V~50Hz 1ph	5000W - 400V~50Hz 3ph	7000W - 400V~50Hz 3ph	9400W - 400V~50Hz 3ph
motor/pump type/RPM	MP4/1450 RPM	MPWJ5/1450 RPM	MPWJ5/1450 RPM	MPWJ5/1450 RPM
max. water inlet temperature	40 °C	40 °C	40 °C	40 °C
dimension/weight	75x50x35cm/ 42 Kg - 92 lbs	75x50x35cm/ 43 Kg - 95 lbs	75x50x35cm/ 46 Kg - 101 lbs	75x50x35cm/ 58 Kg - 128 lbs

Ohio LP

**350 bar
PRESSURE**



Standard equipment:

- 3.700.0022 Gun M24 - 3/8" 350 bar



- 3.701.0020 S. S. Lance M24 l. 1050



- 3.103.0049 Nozzle type 040



- 4.618.0050 High pressure hose 10 m



- Power cable 5 m

Optional:

- 500 bar Rotox lance:
Rotating nozzle code 3.749.0201 + Lance
extension code 3.749.0004 + Quick coupling
code 4.006.0099
- 6.608.0060 Hose reel (hose not included)



Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection
- Three ceramic pistons, brass linear pump head with by-pass valve
- Low voltage and delayed Total Stop
- Suction and delivery S. S. valves
- Pressure regulator
- Glycerine pressure gauge
- Steel frame
- Steel cover.

Ohio 3517 LP	
code	8.651.0101
operat. pressure	350 bar-5076 psi
delivery rate	1020 l/h-4.49 GPM
abs. power/voltage	12500W - 380-400 V~50-60 Hz 3 ph
RPM	1450 RPM
max. water inlet temperature	40 °C
dimension/weight	100x66x92cm / 140 Kg - 308 lbs

Utah-R LP



500 bar PRESSURE



Standard equipment:

- 3.700.0040 Gun + S. S. Lance F 500 bar - l. 1350



- 3.103.0136 Nozzle type 030 - 50 MPa



- 4.618.0178 High pressure hose 20 m



- Power cable 5 m

Optional:

- Rotary head nozzle 3.749.0500 + adapter 3.100.0426



Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection.
- Three ceramic pistons, brass linear pump head with built-in by-pass valve.
- Suction and delivery S. S. valves.
- Pressure regulator.
- Glycerine pressure gauge.
- Steel frame.
- Steel cover.

Utah R 5015 LP	
code	8.632.0001
operat. pressure	500 bar-7250 psi
delivery rate	900 l/h-3.96 GPM
abs. power/voltage	15000W - 400V-50Hz 3 ph
RPM	1450 RPM
max. water inlet temperature	40 °C
dimension/weight	68x99x74cm / 263 Kg - 579 lbs



Thermic 5 H


POWERED by
HONDA

Standard equipment:

- 3.700.0036 Gun M22 - 3/8"



- 3.701.0027 Lance M22 high/low pressure



- 3.103.0048 Nozzle type 035



- 4.618.0049 High pressure hose 8 m



Optional:

- 6.608.0007 High-pressure hose reel (hose not included)
- 5.012.0319 Suction hose with check valve



Equipped with:

- Three ceramic coated pistons, brass axial pump head with built-in by-pass valve.
- Suction and delivery S. S. valves. 5 HP **Honda** GP 160 unleaded gasoline engine.
- Integrated detergent suction with external suction probe.
- Pressure regulator.
- Glycerine pressure gauge.
- Hose reel (**optional**).
- Suction hose with check valve (**optional**).
- Steel frame.
- Hose holder.
- Nozzles holder.
- 3,1 l gasoline tank.

Thermic 5H

code	8.601.0107
operat. pressure	160 bar-2320 psi
delivery rate	570 l/h-2.51 GPM
engine type/hp	Honda GP 160/5
pump type/RPM	TPBH4/3000 RPM
max. water inlet temp.	40 °C
dimension/weight	70x59x97cm / 37 Kg - 81 lbs

Thermic 6,5

NEW



Standard equipment:

- 6.001.0082 Gun M22 - 1/4"



- 6.002.0322 Lance M22 with nozzle-holder.



- 5.012.0477 High pressure nozzle set



- 4.618.0166 High pressure hose 10 m



Optional:

- cod. 6.608.0007 High-pressure hose-reel (hose not included)
- Suction hose with check valve 5.012.0319



T.V. Thermal Valve

Equipped with:

- Three S/S pistons, brass linear pump head with built-in by-pass valve. • Suction and delivery S/S valves. • 6.5 HP unleaded gasoline engine. • Integrated detergent suction with external suction probe. • Glycerine pressure gauge. • Hose-reel **(optional)**. • Suction hose with check valve **(optional)**. • Steel frame.
- Hose holder. • Nozzles holder. • 3,1 l gasoline tank.

	Thermic 6,5
code	8.601.0175C
operat. pressure max	180 bar - 2610 PSI
delivery rate	690 l/h - 2.77 GPM
engine type/hp	Lavor/6,5
pump type/RPM	MP4/3600 RPM
max. temp. inlet/outlet	40 °C
dimension/weight	47 x 57 x 57(h) cm / 38,5 Kg - 84.9 lbs



Thermic 9 L

NEW

T.V. Thermal Valve




Standard equipment:

- 3.700.0036 Gun M22 - 3/8"



- 6.002.0322 Lance M22 with nozzle-holder



- 5.012.0282 High pressure nozzle set



- 4.618.0012 High pressure hose 10 m



Optional:

- 5.012.0319 Suction hose with check valve



Equipped with:

- Three ceramic coated pistons, brass linear pump head with built-in by-pass valve
- Suction and delivery S/S valves
- 9 HP unleaded gasoline engine.
- By-pass with safety valve.
- Integrated detergent suction with external suction probe.
- Pressure regulator.
- Suction hose with check valve (**optional**).
- Steel frame.
- Hose holder.
- Nozzles holder.
- 4 l gasoline tank.



Thermic 9 L	
code	8.601.0188C
operat. pressure/max	220/250 bar - 3190/3625 psi
delivery rate	900 l/h - 3.96 GPM
engine type/hp	Lavor/9
pump type/RPM	TPBH5/3400 RPM
max. water inlet temp.	40 °C
dimension/weight	50x67x 103 cm / 45 Kg - 101 lbs

Thermic 10 D




Standard equipment:

- 3.700.0030 Gun M22 - 3/8" with rotating coupling.



- 3.701.0027 Lance M22 high/low pressure.



- 3.103.0053 Nozzle type 060



- 4.618.0012 High pressure hose 10 m



Optional:

- 5.012.0319 Suction hose with check valve



Equipped with:

- Three ceramic pistons, brass linear pump head with built-in by-pass valve.
- 1450 RPM reducer between engine and pump.
- By-pass with safety valve.
- Automatic RPM regulation.
- Electrical start with engine functions control.
- Lombardini diesel engine 15LD400 (air cooled).
- Integrated detergent suction with external suction probe.
- Pressure regulator.
- Glycerine pressure gauge.
- Suction hose with check valve (**optional**).
- Heavy duty steel frame.
- Battery included.

Thermic 10 D	
code	8.601.0111
operat. pressure	180 bar-2465 psi
delivery rate	1020 l/h-4.49 GPM
engine type/hp	Lombardini 15LD400/10
pump type/RPM	CL5/1450 RPM
max. water inlet temp.	40 °C
dimension/weight	100x66x92cm / 82 Kg - 180 lbs

Thermic 11 H

POWERED by
HONDA™



T.V. Thermal Valve

Equipped with:


- Three ceramic pistons, brass linear pump head.
- 1450 RPM reducer between engine and pump.
- Automatic RPM regulation.
- By-pass with safety valve.
- Suction and delivery S. S. valves.
- Unleaded gasoline engine 11 HP **Honda GX 340**.
- Integrated detergent suction with external suction probe.
- Pressure regulator.
- Glycerine pressure gauge.
- Heavy duty steel frame.
- 6,5 l gasoline tank.
- Suction hose with check valve (**optional** cod. 5.012.0319).
- Protective frame with lifting hooking (**optional** cod. 5.613.0145).
- Hose reel **optional** cod. 6.608.0060 (hose not included) in combination with protective frame.

Standard equipment:

- 3.700.0030 Gun M22 - 3/8 with rotating coupling.



- 3.701.0027 Lance M22 high/low pressure



- 3.103.0054 Nozzle type 065 (Thermic 11 H)



- 4.618.0143 High pressure hose 10 m



Available also model with inflatable wheels and protective frame
Code 8.601.0193



Thermic 11 H	
code	8.601.0115
operat. pressure	200 bar-2900 psi
delivery rate	1080 l/h-4.76 GPM
engine type/hp	Honda GX 340/11
pump type/RPM	CL5/1450 RPM
max. water inlet temp.	40 °C
dimension/weight	100x66x92cm / 61 Kg - 134 lbs

Thermic 13 H

POWERED by
HONDA™



T.V. Thermal Valve

Equipped with:


- Three ceramic pistons, brass linear pump head. • 1450 RPM reducer between engine and pump. • Automatic RPM regulation. • By-pass with safety valve.
- Suction and delivery S. S. valves. • Unleaded gasoline engine 13 HP **Honda** GX 390. • Integrated detergent suction with external suction probe. • Pressure regulator.
- Glycerine pressure gauge. • Heavy duty steel frame. • 6,5 l gasoline tank. • Suction hose with check valve (**optional** cod. 5.012.0319). • Protective frame with lifting hooking (**optional** cod. 5.613.0145). • Hose reel **optional** cod. 6.608.0060 (hose not included) in combination with protective frame.

Standard equipment:

- 3.700.0030 Gun M22 - 3/8 with rotating coupling.



- 3.701.0027 Lance M22 high/low pressure



- 3.103.0051 Nozzle type 050 (Thermic 13 H)



- 4.618.0143 High pressure hose 10 m



Available also model with inflatable wheels and protective frame
Code 8.601.0194



Thermic 13 H

code	8.601.0133
operat. pressure	250 bar-3625 psi
delivery rate	1080 l/h-4.76 GPM
engine type/hp	Honda GX 390/13
pump type/RPM	CL5/1450 RPM
max. water inlet temp.	40 °C
dimension/weight	100x66x92cm / 61 Kg - 134 lbs

The hot water high-pressure cleaner is the best tool for tough or non water-soluble dirt removal. Suitable for different uses and ideal in several sectors like agriculture, food industry and primary and secondary building.



Excellent for machines washing like: tools, engines, farm tractors and means of transport (oily dirt); removal or animal and vegetable residuals (stables and food industry), washing of heavy building equipments (cement mixers, cranes, earth-moving equipments etc.). In the food industry has a perfect hygienising effect.

Why a hot water high-pressure cleaner?

It is necessary the use of a hot water high-pressure cleaner whenever it is necessary to degrease oily or particularly tough dirt in the shortest time possible. Washing efficiency of hot water is much higher than the cold water one (up to 50% higher on some kind of dirt), because heat assists dirt degrease. Heat effect on the surface produce also fast drying. With the use of a hot water high-pressure cleaner it is possible to have: shorter washing time (under the same kind of dirt), better degrease of non water-soluble dirt, shorter drying time and less quantity of chemical product used: in few words, lower cleaning fixed costs and water saving.

The boiler

It is a diesel fuel heater that raises water temperature coming out of the pump; the difference between inlet and outlet water temperature is technically indicated like Delta T.

Boiler dimensions, in other words coil and diesel fuel consumption, determine the thermal power of the burner.

Under the same conditions, increasing the delivery rate (quantity of water to be heated) the Delta T decreases proportionally. It is easy to understand why high pressure cleaners with higher delivery rates have more powerful burners: to grant the best operating temperature in each working condition. All our boilers have very high thermal efficiency, near 90% or higher. This means very low operating cost with reference to diesel fuel consumption.

What changes among high-pressure cleaners with similar performances?

It is necessary to consider besides pressure and delivery rate also the standard equipment (dimensions and type), optional functions (antiscala, total stop, etc.) and the manufacturing specifications (type of materials and applied technology). Nevertheless the most important aspect is the resistance to wear and tear and to continuous use, that raises progressively with the increase of manufacturing components specifications or moving up from a model to the next class one.



• Linear pump:

CRANKSHAFT The movement of the (3) pistons occur through a system of connecting rods and crankshaft. The longitudinal axle of the pistons (placed at the same level or linear) is perpendicular to the motor rotation axle. It is more versatile to bear high delivery rates (from 21 l/min) and it has a better self priming.



• Water cooled motor:

Water flows through the S. S. coil around the motor, this allows a better thermal exchange (and so a cooling) than air also in those countries where inlet water could reaches 60°C. This allows a drop in operating temperature of the motor and pump mechanical elements, granting a better reliability and longer life.



• Total Stop:

Releasing the gun trigger the pump stops automatically avoiding element damages during the by-pass phase. Pulling the trigger, the high-pressure cleaner starts automatically. Max pump protection.



• Low voltage and delayed Total Stop:

To avoid quick and multiple start and shut down of the motor/pump group whenever the gun

trigger is pulled and released, this disposal delays of about 15 seconds the machine shut down. Prevention, energy saving, top safety and pump longer life.



• Low voltage and delayed Total Stop with intelligent shut down:

To avoid quick and multiple start and shut down of the motor/pump group whenever the gun trigger is pulled and released, this disposal delays of about 15 seconds the machine shut down. In case the machine is unused for more than 20 minutes or there are leakages in the pressure circuit, the machine shuts down automatically and completely: control panel power cut-off. Prevention, energy saving, top safety and pump longer life.



• Motor low rotation speed:

The electric motor transfers the same number of revolutions to the pump. With a 4 poles motor there is a lower rotation speed of the components (1400 RPM in case of 50Hz or 1750 RPM in case of 60 Hz) granting longer pump life. Extending lifetime solution.



• Pressure accumulator:

The release of the gun trigger produces a strong counterstroke in the pump. This device amortizes this power with great benefit for the pump components and for the user, because it removes all the vibrations.



Vulcano

Mississippi-R XP

Dakota-R XP

NPX XP

Texas-R XP

LKX LP

Tekna LP

Code	Model	operating pressure (max. pressure)		delivery rate	delivery rate	absorbed power	rpm	voltage	outlet temp.	fuel consumption	diesel tank	onitscale tank	heat output	packaging	packaging weight	
		pag	bar													psi
8.699.0015	VULCANO 74	40	-	-	-	300	-	230-50	max 140°	5,6 - 1.5	18 - 4.8	-	74	113x71x111	103.6 - 228	
8.625.0101	MISSISSIPPI R 1310 XP	41	30÷130	435÷1885	330÷600	1.45÷2.64	3000	2800	230-50	max 90°	2,83 - 0.75	14 - 3.7	-	38	65x85x100	71.5 - 157
8.633.0107	DAKOTA R 1509 XP	42	30÷120	435÷1740	330÷660	1.45÷2.91	3200	2800	230-50	max 140°	3,7 - 0.97	16 - 4.2	-	58	69x85x111	94 - 207
8.633.0108	DAKOTA R 2007 XP	42	30÷150	435÷2175	330÷660	1.45÷2.91	4000	2800	400-50	max 140°	3,7 - 0.97	16 - 4.2	-	58	69x85x111	97 - 213
8.633.0109	DAKOTA R 1713 XP	42	30÷170	435÷2465	400÷780	1.76÷3.43	6300	2800	400-50	max 140°	3,7 - 0.97	16 - 4.2	-	58	69x85x111	95 - 209
8.620.0601	NPX 1211 XP	43	30÷120	435÷1740	330÷660	1.45÷2.91	3200	2800	230-50	max 140°	4,72 - 1.25	18 - 4.8	-	58	71x113x111	118 - 260
8.620.0617	NPX 1813 XP	43	30÷180	435÷2610	400÷780	1.76÷3.43	6300	2800	400-50	max 140°	4,72 - 1.25	18 - 4.8	-	58	71x113x111	117.5 - 259
8.630.0101	TEXAS R 1211	44	30÷120	435÷1740	330÷660	1.45÷2.91	3000	1450	230-50	max 140°	3,8 - 1.0	16 - 4.2	-	58	69x85x111	104 - 229
8.630.0102	TEXAS R 1509	44	30÷150	435÷2175	330÷540	1.45÷2.40	3000	1450	400-50	max 140°	3,8 - 1.0	16 - 4.2	-	58	69x85x111	104 - 229
8.630.0103	TEXAS R 1611	44	30÷170	435÷2465	400÷660	1.76÷2.91	4300	1450	400-50	max 140°	3,8 - 1.0	16 - 4.2	-	58	69x85x111	104 - 229
8.621.2947	LKX 1310 LP	45	30÷110	435÷1595	330÷660	1.45÷2.91	3000	1450	230-50	max 140°	4,72 - 1.25	18 - 4.8	-	58	113x71x111	130.5 - 287
8.621.2934	LKX 1515 LP	45	30÷150	435÷2175	450÷900	1.98÷3.96	5500	1450	400-50	max 140°	5,6 - 1.5	18 - 4.8	-	74	113x71x111	143.4 - 316
8.621.2935	LKX 2015 LP	45	30÷200	435÷2900	450÷900	1.98÷3.96	7300	1450	400-50	max 140°	5,6 - 1.5	18 - 4.8	-	74	113x71x111	146 - 322
8.622.0901	TEKNA 1515 LP	46	30÷150	435÷2175	450÷900	1.98÷3.96	5500	1450	400-50	max 140°	4,72 - 1.25	22 - 5.8	2,4 - 0.6	58	130x78x111	161 - 355





Hyper L LP



Hyper T LP



HHPV LP



Thermic 10 HW



Thermic 17 HW

Code	Model	operating pressure (max pressure)		delivery rate	delivery rate	absorbed power	rpm	voltage	outlet temp.	fuel consumption	diesel tank	antiscal tank	heat output	packaging	packaging weight	
		pag	bar													psi
8.622.0902	TEKNA 2015 LP	46	30÷200	435÷2900	450÷900	1.98÷3.96	7300	1450	400-50	max 140°	4,72 - 1.25	22 - 5.8	2,4 - 0.6	58	130x78x111	172 - 379
8.622.0921	TEKNA 2021 LP	46	30÷200	435÷2900	630÷1260	2.77÷5.55	9700	1450	400-50	max 140°	6,6 - 1,75	22 - 5.8	2,4 - 0.6	88	130x78x111	180 - 396
8.621.2921	HYPER L 1211 LP	47	30÷110	435÷1595	345÷660	1.52÷2.91	3000	1450	230-50	max 140°	4,72 - 1.25	18 - 4.8	-	58	113x71x111	127 - 280
8.621.0907	HYPER L 1515 LP	47	30÷150	435÷2175	345÷900	1.52÷3.96	5500	1450	400-50	max 140°	5,6 - 1,5	18 - 4.8	-	74	113x71x111	148.5 - 327
8.621.0908	HYPER L 2015 LP	47	30÷200	435÷2900	450÷900	1.98÷3.96	7300	1450	400-50	max 140°	5,6 - 1,5	18 - 4.8	-	74	113x71x111	148.5 - 327
8.621.0928	HYPER L 2021 LP	47	30÷200	435÷2900	630÷1260	2.77÷5.55	9700	1450	400-50	max 140°	5,6 - 1,5	18 - 4.8	-	74	113x71x111	148.5 - 327
8.623.0911	HYPER T 2015 LP	48	30÷200	435÷2900	450÷900	1.98÷3.96	7300	1450	400-50	max 140°	6,6 - 1,75	22 - 5.8	2,4 - 0.6	88	130x78x111	187 - 412
8.623.0928	HYPER T 2515 LP	48	30÷250	435÷3600	450÷900	1.98÷3.96	8700	1450	400-50	max 140°	6,6 - 1,75	22 - 5.8	2,4 - 0.6	88	130x78x111	191 - 421
8.623.0902	HYPER T 2021 LP	48	30÷200	435÷2900	630÷1260	2.77÷5.55	9700	1450	400-50	max 140°	6,6 - 1,75	22 - 5.8	2,4 - 0.6	88	130x78x111	181.5 - 400
8.624.0601	HHPV 1211 LP	49	30÷120	435÷1740	345÷660	1.52÷2.91	3000	1450	230 - 50	max 140°	4,72 - 1.25	20 - 5.3	-	58	80x120x185	199 - 438
8.624.0603	HHPV 2015 LP	49	30÷200	435÷2900	450÷900	1.98÷3.96	7300	1450	400 - 50	max 140°	4,72 - 1.25	20 - 5.3	-	58	80x120x185	199 - 438
8.624.0604	HHPV 2021 LP	49	30÷200	435÷2900	630÷1260	2.77÷5.55	9700	1450	400 - 50	max 140°	4,72 - 1.25	20 - 5.3	-	58	80x120x185	210 - 463
8.601.0099	THERMIC 10 HW	50	30÷170	435÷2465	1020	4,49	10hp	1700	-	max 140°	4.72 - 1.25	30 - 7.9	-	58	120x80x107	160 - 352
8.601.0052	THERMIC 17 HW	51	30÷200	435÷2900	1320	5,82	17hp	1700	-	max 140°	5.6 - 1.5	40 - 10.5	-	74	120x85x112	355 - 781




Vulcano 74



Equipped with:

- Boiler feeding: Diesel
High thermal efficiency vertical burner.
- Shock-resistant self-bearing frame.
 - 4 big wheels for easy move.
 - Gasoil tank high capacity ensuring longer working.
 - Quick couplings supplied with the machine.
 - Diesel tank capacity 18 l.
 - High pressure hose 3/8" Ø 5/16" 10 m, to connect any cold high pressure cleaner to Vulcano **(optional)**.

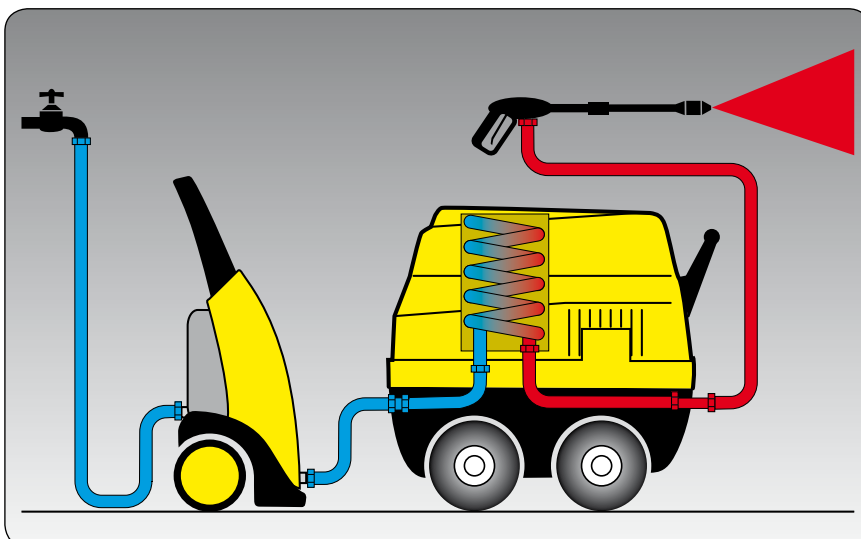

Optional:

4.618.0012 high pressure hose 3/8" Ø 5/16" 10m, to connect any cold high pressure cleaner to the Vulcano.



Vulcano 74

code	8.699.0015
operat. pressure allowed max.	200 bar-2900 psi
delivery rate allowed max.	1260 l/h-5.55 GPM
abs. power/voltage	300W/230V~50Hz 1 ph
max. temp. outlet	140 °C
heat output	74 kW
dimension/weight	94x65x90cm / 44 Kg - 88 lbs

Mississippi-R XP

NEW

T.S. Total Stop




Standard equipment:

- 3.700.0036 Gun M22 - 3/8"



- 3.701.0015 Lance M22 high/low pressure



- 3.103.0047 Nozzle type 030



- 4.618.0049 High pressure hose 8 m



- Power cable 5 m

Equipped with:

- Three ceramic coated pistons, brass axial pump head with built-in by-pass valve.
- Suction and delivery S. S. valves. • Vertical burner with high thermal efficiency steel coil. • Temperature regulation gauge. • Diesel pump with by-pass valve. • Detergent built-in tank for indirect suction 2,4 lt. • Pressure regulator. • Glycerine pressure gauge. • Power cable holder. • Accessory holder. • Ergonomic handle.

Mississippi-R 1310 XP

code	8.625.0101
operat. pressure/max	130/150 bar-1885/2175 psi
delivery rate	600 l/h-2.64 GPM
abs. power/voltage	3000W - 230V~50Hz 1ph
motor/pump type/RPM	MPBX2/2800 RPM
max. water inlet/outlet temp.	40/90 °C
dimension/weight	80x55x83cm / 55 Kg - 121 lbs

Dakota-R XP

NEW

T.S.
Total Stop **24V**




Standard equipment:

- 3.700.0036 Gun M22 - 3/8" with rotating coupling.



- 3.701.0015 Lance M22 high/low pressure



- 3.103.0050 Nozzle type 045 (mod. 1509 XP 2007 XP)

- 3.103.0051 Nozzle type 050 (mod. 1713 XP)



- 4.618.0049 High pressure hose 8 m



- Power cable 5 m

Optional:

- 6.608.0073 Hose reel with brake (hose not included)

Equipped with:

- Three ceramic coated pistons, brass axial pump head with built-in by-pass valve.
- Low voltage and delayed Total Stop.
- Suction and delivery S. S. valves.
- Vertical burner with high thermal efficiency steel coil.
- Temperature regulation gauge.
- Low fuel lamp.
- Safety valve.
- Detergent built-in tank (4,2 lt) for indirect suction.
- Pressure regulator.
- Glycerine pressure gauge.
- Panel with analogic controls.
- Hose reel with brake **(optional)**.

	Dakota-R 1509 XP	Dakota-R 2007 XP	Dakota-R 1713 XP
code	8.633.0107	8.633.0108	8.633.0109
operat. pressure/max	150/160 bar-2175/2320 psi	200 bar-2900 psi	170 bar-2465 psi
delivery rate	540 l/h-2.37 GPM	420 l/h-1.84 GPM	780 l/h-3.43 GPM
abs. power/voltage	3200W - 230V~50Hz 1ph	3300W - 230V~50Hz 1ph	6300W - 400V~50Hz 3 ph
motorpump type/RPM	MPBX2/2800 RPM	MPBX2/2800 RPM	MPBX2/2800 RPM
max. water inlet/outlet temp.	40/140 °C	40/140 °C	40/140 °C
dimension/weight	75x58x103 cm / 74 Kg - 163 lbs	75x58x103 cm / 74 Kg - 163 lbs	75x58x103 cm / 76 Kg - 167 lbs

NPX XP




Standard equipment:

- 3.700.0030 Gun M22 - 3/8" with rotating coupling.



- 3.701.0015 Lance M22 high/low pressure



- 3.103.0050 Nozzle type 045 (mod. 1211 XP)
- 3.103.0049 Nozzle type 040 (mod. 1813 XP)



- 4.618.0143 High pressure hose 10 m



- Power cable 5 m

Optional:

- 6.608.0001 Hose reel with brake (hose not included)

Equipped with:

- Three ceramic coated pistons, brass axial pump head with built-in by-pass valve.
- Low voltage and delayed Total Stop.
- Suction and delivery S. S. valves.
- Vertical burner with high thermal efficiency steel coil.
- Temperature regulation gauge.
- Low fuel lamp.
- Safety valve.
- Detergent built-in tank (4,2 lt) for indirect suction.
- Pressure regulator.
- Glycerine pressure gauge.
- Panel with analogic controls.
- Heavy duty steel frame.
- Accessory holder.
- Two ways fuel pump.
- Hose reel with brake **(optional)**.

	NPX 1211 XP	NPX 1813 XP
code	8.620.0601	8.620.0617
operat. pressure/max	120/150 bar-1740/2175 psi	180 bar-2610 psi
delivery rate	660 l/h-2.91 GPM	780 l/h-3.43 GPM
abs. power/voltage	3200W - 230V~50Hz 1ph	6300W - 400V~50Hz 3 ph
motorpump type/RPM	MPBX2/2800 RPM	MPBX2/2800 RPM
max. water inlet/outlet temp.	40/140 °C	40/140 °C
dimension/weight	94x65x90cm / 97 Kg - 213 lbs	94x65x90cm / 99 Kg - 217 lbs

Texas-R LP




NEW




Standard equipment:

- 3.700.0030 Gun M22 - 3/8" with rotating coupling.



- 3.701.0015 Lance M22 high/low pressure



- 3.103.0050 Nozzle type 045 (mod. 1211 LP 1611 LP)
- 3.103.0047 Nozzle type 030 (mod. 1509 LP)



- 4.618.0049 High pressure hose 8 m (mod 1211 LP)
- 4.618.0143 High pressure hose 10 m (mod 1509/1611 LP)



- Power cable 5 m

Optional:

- 6.608.0073 Hose reel with brake (hose not included)

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection and water cooling (three phase models).
- Three ceramic coated pistons (1 ph), full ceramic pistons (3 ph), brass linear pump head with built-in by-pass valve.
- Low voltage and delayed Total Stop.
- Suction and delivery S. S. valves.
- Vertical burner with high thermal efficiency steel coil.
- Temperature regulation gauge with high sensitive stainless steel sensor.
- Detergent built-in tank (4,2 lt) for indirect suction.
- Auxiliary motor for burner.
- Hose reel with brake (**optional**).

	Texas-R 1211 LP	Texas-R 1509 LP	Texas-R 1611 LP
code	8.630.0101	8.630.0102	8.630.0103
operat. pressure/max	120/150 bar-1740/2175 psi	150 bar-2175 psi	160 bar-2320 psi
delivery rate	660 l/h-2.91 GPM	540 l/h-3.17 GPM	660 l/h-2.91 GPM
abs. power/voltage	3000W - 230V~50Hz 1ph	3000W - 230V~50Hz 1ph	4300W - 400V~50Hz 3 ph
motorpump type/RPM	MP4/1450 RPM	MP4/1450 RPM	MP4/1450 RPM
max. water inlet/outlet temp.	40/140 °C	40/140 °C	40/140 °C
dimension/weight	94x65x90cm / 112 Kg - 246 lbs	94x65x90cm / 113 Kg - 275 lbs	94x65x90cm / 128 Kg - 282 lbs



CRANKSHAFT



Models: 1515 LP
2015 LP




LKX LP

Standard equipment:

- 3.700.0030 Gun M22 - 3/8" with rotating coupling.



- 3.701.0015 Lance M22 high/low pres. (mod. 1310 LP)



- 3.103.0050 Nozzle type 045 (mod. 1111 LP)
- 3.103.0053 Nozzle type 060 (mod. 1515 LP)
- 3.103.0050 Nozzle type 045 (mod. 2015 LP)



- 4.618.0143 H. P. hose 10 m



- Power cable 5 m

Optional:

- 6.608.0004 Hose reel with brake (hose not included)
- On request models with header tank and/or antiscaling device.
- 3.697.0044 Antiscaling LC-PRECAL (pcs. 4 x 5 lt.)
- Code 8.621.2944 LKX 2015 with header tank
- Code 8.621.2032 LKX 2015 with header tank and antiscaling device

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection and water cooling (three phase models).
- Three ceramic coated pistons (1 ph), full ceramic pistons (3 ph), brass linear pump head with built-in by-pass valve.
- Low voltage and delayed Total Stop.
- Suction and delivery S. S. valves.
- Vertical burner with high thermal efficiency steel coil.
- Temperature regulation gauge with high sensitive stainless steel sensor.
- Detergent built-in tank (3 lt) for indirect suction.
- Auxiliary motor for burner.
- Heavy duty steel frame.
- Hose reel with brake (**optional**).



	LKX 1310 LP	LKX 1515 LP	LKX 2015 LP
code	8.621.2947	8.621.2934	8.621.2935
operat. pressure/max	110/150 bar-1595/2175 psi	150 bar-2175 psi	200 bar-2900 psi
delivery rate	660 l/h-2.91 GPM	900 l/h-3.96 GPM	900 l/h-3.96 GPM
abs. power/voltage	3000W - 230V~50Hz 1ph	5500W - 400V~50Hz 3 ph	7300W - 400V~50Hz 3 ph
motor/pump type/RPM	MP4/1450 RPM	MPW4/1450 RPM	MPW4/1450 RPM
max. water inlet/outlet temp.	40/140 °C	40/140 °C	40/140 °C
dimension/weight	94x65x90cm / 112 Kg - 246 lbs	94x65x90cm / 125 Kg - 275 lbs	94x65x90cm / 128 Kg - 282 lbs



Tekna LP

Standard equipment:

- 3.700.0030 Gun M22 - 3/8" with rotating coupling.



- 3.708.0001 Lance with quick connection.



- 3.103.0053 Nozzle type 060 (mod. 1515 LP)
- 3.103.0050 Nozzle type 045 (mod. 2015 LP)
- 3.103.0055 Nozzle type 070 (mod. 2021 LP)



- 4.618.0143 High pressure hose 10 m



- Power cable 5 m



Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection and water cooling. Three ceramic pistons, brass linear pump head with built-in by-pass valve.
- Low voltage and delayed Total Stop.
- Suction and delivery S. S. valves.
- Vertical burner with high thermal efficiency steel coil.
- High pressure detergent flow with 22 liters integrated detergent tank
- Auxiliary motor for burner air-cooling and two ways fuel pump.
- Temperature regulation gauge with high sensitive stainless steel sensor.
- Low fuel lamp and cut off. Safety valve.
- Header tank and antiscaling device. Panel with analogic controls. Hose reel (**optional**).




Optional:

- 6.608.0005 Hose reel with brake (hose not included)
- 3.697.0044 Antiscaling LC-PRECAL (pcs. 4 x 5 ft.)

	TEKNA 1515 LP	TEKNA 2015 LP	TEKNA 2021 LP
code	8.622.0901	8.622.0902	8.622.0921
operat. pressure	150 bar-2175 psi	200 bar-2900 psi	200 bar-2900 psi
delivery rate	900 l/h-3.96 GPM	900 l/h-3.96 GPM	1260 l/h-5.55 GPM
abs. power/voltage	5500W - 400V~50Hz 3ph	7300W - 400V~50Hz 3 ph	9700W - 400V~50Hz 3 ph
motor/pump type/RPM	MPW5/1450 RPM	MPW5/1450 RPM	MPW5/1450 RPM
max. water inlet/outlet temp.	40/140 °C	40/140 °C	40/140 °C
dimension/weight	125x69x87cm / 138 Kg - 304 lbs	125x69x87cm / 143 Kg - 315 lbs	125x69x87cm / 145 Kg - 319 lbs

HyperL

GUARANTEED



Model: 1515 LP
2015 LP
2021 LP




Standard equipment:

- 3.700.0030 Gun M22 - 3/8" with rotating coupling. (mod. 1211 LP)



- 3.701.0015 Lance M22 high/low press. (1211 LP)



- 3.103.0053 Nozzle type 060 (mod. 1515 LP)
- 3.103.0050 Nozzle type 045 (mod. 2015 LP - 1211 LP)
- 3.103.0054 Nozzle type 065 (mod. 2021 LP)



- 4.618.0143 High pressure hose 10 m



- Power cable 5 m

Optional:

- 6.608.0004 Hose reel with brake (hose not included)
- Code. 8.621.0923 Hyper L 2015 with header tank and antiscale device

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection and water cooling.
- Three ceramic coated pistons (1 ph), full ceramic pistons (3 ph), brass linear pump head with built-in bypass valve.
- Integrated elastic joint, for best pump coupling.
- Low voltage and delayed Total Stop.
- Suction and delivery S. S. valves.
- Vertical burner with high thermal efficiency steel coil.
- Temperature regulation gauge with high sensitive stainless steel sensor.
- Detergent built-in tank 3 l.
- Auxiliary motor for burner air cooling and mechanical two ways fuel pump.
- Hose reel **(optional)**.



Integrated elastic joint, for best pump coupling
(1211 Excluded)

	HYPER L 1211 LP	HYPER L 1515 LP	HYPER L 2015 LP	HYPER L 2021 LP
code	8.621.2921	8.621.0907	8.621.0908	8.621.0928
operat. pressure	110/150 bar-1595/2175 psi	150 bar-2175 psi	200 bar-2900 psi	200 bar-2900 psi
delivery rate	660 l/h-2.91 GPM	900 l/h-3.96 GPM	900 l/h-3.96 GPM	1260 l/h-5.55 GPM
abs. power/voltage	3000W - 230V~50Hz 1ph	5500W - 400V~50Hz 3ph	7300W - 400V~50Hz 3ph	9700W - 400V~50Hz 3 ph
motor/pump type/RPM	MP4/1450 RPM	MPWJ5/1450 RPM	MPWJ5/1450 RPM	MPWJ5/1450 RPM
max. water inlet/outlet temp.	40/140 °C	40/140 °C	40/140 °C	40/140 °C
dimension/weight	94x65x90cm / 109 Kg - 240 lbs	94x65x90cm / 127 Kg - 280 lbs	94x65x90cm / 129 Kg - 284 lbs	94x65x90cm / 131 Kg - 288 lbs

HyperT

GUARANTEED



CRANKSHAFT



TS
Total Stop 24V



Standard equipment:

- 3.700.0030 Gun M22 - 3/8" with rotating coupling.



- 3.708.0001 Lance with quick connection.



- 3.103.0050 Nozzle type 045 (mod. 2015 LP)
- 3.103.0055 Nozzle type 070 (mod. 2021 LP)
- 3.103.0049 Nozzle type 040 (mod. 2515 LP)



- 4.618.0143 High pressure hose 10 m



- Power cable 5 m



Only
2015 LP - 2021 LP

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection and water cooling.
- Three ceramic pistons, brass linear pump head with built-in by-pass valve.
- Integrated elastic joint, for best pump coupling.
- Low voltage and delayed Total Stop.
- Vertical burner with high thermal efficiency steel coil.
- High pressure detergent flow with 22 liters integrated detergent tank
- Auxiliary motor for burner air-cooling and two ways fuel pump.
- Temperature regulation gauge with high sensitive stainless steel sensor.
- Header tank and antiscaling device.
- Pressure accumulator for hose and gun vibrations prevention (only 2015/2021 models).
- Hose reel (**optional**).



Integrated elastic joint, for best pump coupling

Optional:

- 6.608.0005 Hose reel with brake (hose not included)
- 3.697.0044 Antiscaling LC-PRECAL (pcs. 4 x 5 lt.)

	HYPER T 2015 LP	HYPER T 2021 LP	HYPER T 2515 LP
code	8.623.0911	8.623.0902	8.623.0928
operat. pressure	200 bar-2900 psi	200 bar-2900 psi	250 bar-3600 psi
delivery rate	900 l/h-3.96 GPM	1260 l/h-5.55 GPM	900 l/h-3.96 GPM
abs. power/voltage	7300W - 400V~50Hz 3ph	9700W - 400V~50Hz 3 ph	8700W - 400V~50Hz 3 ph
motor/pump type/RPM	MPWJ5/1450 RPM	MPWJ5/1450 RPM	MPWJ5/1450 RPM
max. water inlet/outlet temp.	40/140 °C	40/140 °C	40/140 °C
dimension/weight	125x69x89cm / 169 Kg - 372 lbs	125x69x89cm / 171 Kg - 376 lbs	125x69x89cm / 173 Kg - 381 lbs



HHPV LP



Standard equipment:

- 3.700.0030 Gun M22 - 3/8" with rotating coupling.



- 3.708.0001 Lance with quick connection.



- 3.103.0050 Nozzle type 045 (mod. 1211 LP)
- 3.103.0051 Nozzle type 050 (mod. 2015 LP)
- 3.103.0056 Nozzle type 075 (mod. 2021 LP)



- 4.618.0143 High pressure hose 10 m



- Power cable 5 m

Optional:

- 6.608.0032 Rotating Booms
- 6.608.0026 Flame sensor kit
- 6.608.0029 Remote control kit
- 6.605.0221 Low temperature internal insulation protection/heating
- With header tank and anti scale device

Equipped with:

- 4 poles electrical motor (1450 RPM) with thermal protection and water cooling.
- Three ceramic coated pistons (1 ph), full ceramic pistons (3 ph), brass linear pump head with built-in by-pass valve.
- Integrated elastic joint, for best pump coupling.
- Low voltage and delayed Total Stop.
- Suction and delivery S. S. valves.
- Detergent built-in tank 25 l.
- Vertical burner with high thermal efficiency steel coil.
- Header tank.
- High pressure detergent dosing pump.
- Control panel with protection cover.
- Accessory holder.
- S. S. fixing base support.
- Varnished steel structure.
- Rotating booms (**optional**).



	HHPV 1211 LP	HHPV 2015 LP	HHPV 2021 LP
code	8.624.0601	8.624.0603	8.624.0604
operat. pressure	120 bar-1740 psi	200 bar-2900 psi	200 bar-2900 psi
delivery rate	660 l/h-2.91 GPM	900 l/h-3.96 GPM	1260 l/h-5.55 GPM
abs. power/voltage	3000W - 230V~50Hz 1ph	7300W - 400V~50Hz 3ph	9700W - 400V~50Hz 3 ph
motorpump type/RPM	MPWJ5/1450 RPM	MPWJ5/1450 RPM	MPWJ5/1450 RPM
max. water inlet/outlet temp.	40/140 °C	40/140 °C	40/140 °C
dimension/weight	76x48x180cm / 181 Kg - 398 lbs	76x48x180cm / 190 Kg - 418 lbs	76x48x180cm / 192 Kg - 422 lbs

Thermic 10 HW Hot water self-contained unit



T.V. Thermal Valve

Equipped with:


- Three ceramic pistons, brass linear pump head with built-in by-pass valve.
- By-pass thermal protection with safety valve.
- Electrical start with full engine functions control.
- Auxiliary belt driven sturdy alternator.
- Lombardini diesel engine 15LD400 (air cooled).
- Pump-motor gearbox (1.650 RPM).
- Automatic engine RPM regulator.
- Integrated detergent suction with external suction probe.
- Electrical start with engine functions control.
- Unique diesel tank for engine and burner.
- Battery included.

Standard equipment:

- 3.700.0030 Gun M22 - 3/8" with rotating coupling.



- 3.701.0015 Lance M22 high/low press.



- 3.103.0052 Nozzle type 055



- 4.618.0012 High pressure hose 10 m



Optional:

- 5.613.0252 S. S. header tank (high pressure chemical)
- 6.608.0014 Varnished soundproofing steel cover set code
- 6.608.0020 Trolley set with inflateable wheels & handles



Thermic 10 HW	
code	8.601.0099
operat. pressure	170 bar-2465 psi
delivery rate	1020 l/h-4.49 GPM
engine type/hp	Lombardini 15LD400/10
pump type/RPM	CL5/1650 RPM
max. water inlet/outlet temp.	40/140 °C
dimension/weight	68x99x74cm / 140 Kg - 208 lbs

Thermic 17 HW

Hot water self-contained unit with integrated electric generator



Equipped with:

- Three ceramic pistons, brass linear pump head with built-in by-pass valve.
- By-pass thermal protection with safety valve.
- 2 cylinder water cooled diesel engine with electrical start.
- Integrated electric generator.
- Auxiliary belt driven sturdy alternator.
- Lombardini diesel engine LDW702 (air cooled).
- Belt driven pump.
- Automatic engine RPM regulator.
- Socket tool 230V max 1.5 kW
- Front panel with engine function led and automatic power cut-off.
- Unique diesel tank for engine and burner.
- Battery included.

Standard equipment:

- 3.700.0030 Gun M22 - 3/8" with rotating coupling.



- 3.708.0001 Lance with quick connection.



- 3.103.0056 Nozzle type 075



- 4.618.0143 High pressure hose 10 m



Optional:

- 6.608.0013 Varnished soundproofing steel cover set



Thermic 17 HW

code	8.601.0052
operat. pressure	200 bar-2900 psi
delivery rate	1320 l/h-5.82 GPM
engine type/hp	Lombardini LDW702/17
pump type/RPM	CL5/1600 RPM
max. water inlet/outlet temp.	40/140 °C
dimension/weight	113x75x85cm / 220 Kg - 480 lbs



High-pressure nozzle



- 3.103.0027 high-pressure nozzle 0.30
- 3.103.0037 high-pressure nozzle 0.35
- 3.103.0028 high-pressure nozzle 0.40
- 3.103.0034 high-pressure nozzle 0.45
- 3.103.0029 high-pressure nozzle 0.50
- 3.103.0030 high-pressure nozzle 0.55
- 3.103.0031 high-pressure nozzle 0.60
- 3.103.0025 high-pressure nozzle 0.70
- 3.103.0070 high-pressure nozzle 0.75
- 3.103.0033 high-pressure nozzle 0.90



- 3.103.0047 high-pressure nozzle 0.30
- 3.103.0048 high-pressure nozzle 0.35
- 3.103.0049 high-pressure nozzle 0.40
- 3.103.0050 high-pressure nozzle 0.45
- 3.103.0051 high-pressure nozzle 0.50
- 3.103.0052 high-pressure nozzle 0.55
- 3.103.0053 high-pressure nozzle 0.60
- 3.103.0055 high-pressure nozzle 0.70
- 3.103.0056 high-pressure nozzle 0.75
- 3.103.0058 high-pressure nozzle 0.85



- 3.103.0018 high-pressure nozzle 0.30
- 3.103.0020 high-pressure nozzle 0.35
- 3.103.0009 high-pressure nozzle 0.40
- 3.103.0016 high-pressure nozzle 0.45
- 3.103.0017 high-pressure nozzle 0.50
- 3.103.0019 high-pressure nozzle 0.55
- 3.103.0021 high-pressure nozzle 0.60
- 3.103.0067 high-pressure nozzle 0.70
- 3.103.0068 high-pressure nozzle 0.75
- 3.103.0069 high-pressure nozzle 0.90



- 3.749.0200 rotary nozzle max 500 bar - 0.40
- 3.749.0201 rotary nozzle max 500 bar - 0.45
- 3.749.0202 rotary nozzle max 500 bar - 0.50
- 3.749.0203 rotary nozzle max 500 bar - 0.55
- 3.749.0204 rotary nozzle max 500 bar - 0.60
- 3.749.0205 rotary nozzle max 500 bar - 0.65
- 3.749.0206 rotary nozzle max 500 bar - 0.70
- 3.749.0263 rotary nozzle max 350 bar - 0.90

Rotary head nozzle

Rotary nozzle max 350/500 bar:
G 1/4" F with S. S. body and seat/nozzle in highly shock-resistant tungsten carbide

Extension set for rotary nozzle:
1/4" M - 1/4" M codes 3.749.0004 + 4.006.0099 Spare coupling for gun M 22



1) Sand-blasting heads max 250 bar, **are not** supplied with nozzles.
Orders will be always placed with the nozzle required.

Sand-blasting heads max 250 bar

- 3.749.0207 Sand blasting head - blade type
- 3.749.0208 Sand blasting head - round type
- 3.749.0209 Sand blasting head - prolonged type

Sand-blasting head

Sand-blasting nozzles













- 3.749.0434 nozzle 0.40
- 3.749.0433 nozzle 0.45
- 3.749.0432 nozzle 0.50



2) Prolonged adjustable probe for sand-blasting













- 3.749.0210 S. S. prolonged adjustable Ø 21 probe L = 500 mm

Accessories Vanguard line

			ALASKA 1409 XP	HYPER KA 1409 XP	LMX 1211 XP	LMX 2007 XP	ARIZONA R 1209 LP	ARIZONA R 1311 LP	HYPER A 1311 LP	HYPER A 1510 LP	TUCSON 1211 LP	TUCSON 1510 LP	TUCSON 1515 LP	TUCSON 2015 LP	TUCSON XL 1211 LP	TUCSON XL 1515 LP	TUCSON XL 2015 LP	TUCSON XL 2515 LP
	3.700.0030	Gun 3/8" - M22 coupling (only for lance 3.701.0015 - 3.708.0001)		•	•						•	•	•	•	•	•	•	•
	3.700.0025	Gun RL 30 3/8" M - 1/4" F (only for lance 6.602.0049 - 6.602.0050)		•	•						•	•	•	•	•	•	•	•
	4.618.0049	8 m H.P. Hose - 3/8" M22 - Ø 1/4" - 210 bar	•	•		•	•	•										
	4.618.0012	10 m H.P. Hose - 3/8" - Ø 5/16" - 310 bar			•	•					•	•	•	•	•	•	•	•
	4.618.0056	20 m H.P. Hose - 3/8" - Ø 5/16" - 400 bar									•	•	•	•	•	•	•	•
	4.618.0057	20 m H.P. Hose - 3/8" - Ø 3/8" - 400 bar																•
	4.618.0058	10 m H.P. Hose for food industry - 3/8" - Ø 3/8" - 400 bar																•
	6.602.0049	mm 1700 S. S. 1/4" M - 1/8" F high/low press. (for det. suction) only for gun 3.700.0025		•	•						•	•	•	•	•	•	•	•
	6.602.0050	mm 1700 S. S. 1/4" M - 1/8" F lance with nozzle-holder - only for gun 3.700.0025		•	•						•	•	•	•	•	•	•	•
	6.602.0040	Lance Rotox type 1 M22 coupling - 0,45		•			•	•					•	•	•	•		
	6.602.0041	Lance Rotox type 2 M22 coupling - 0,55											•			•		
	6.602.0027	M22 coupling - 0,40 Widia sand-blasting lance		•			•	•							•	•	•	•
	6.602.0028	M22 coupling - 0,50 Widia sand-blasting lance											•			•		
	6.602.0029	M22 coupling - 0,75 Widia sand-blasting lance															•	
	3.701.0025	Double lance mm 500 with regulator knob max 250 bar with nozzle holder	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0003	Foam lance max temperature 90° C. For gun M 22 coupling max 250 bar	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0055	Foam lance with regulator max temp. 60° C - with M22 coupling	•	•	•	•	•	•	•	•	•	•	•					
	6.602.0053	Foam lance with regulator max temp. 60° C - M22 coupling with tank 1 lt.	•	•	•	•	•	•	•	•	•	•	•					
	3.102.0011	Water filter 3/4" F - 3/4" M 80 microns	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	0.011.0001	Calibrated sand - 6 pieces of 5 kg each	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

• = suitable

Accessories Heritage line

			MYSTIC R 1309 XP	BOU 1509 LP	COLUMBIA R 1211 LP	COLUMBIA R 1515 LP	COLUMBIA R 2015 LP	COLUMBIA R 1211 LP Foam	HYPER C 1211 LP	HYPER C 1515 LP	HYPER C 2015 LP	HYPER C 2021 LP	HYPER C 2515 LP	MCHPV X 1211 LP	MCHPV 1515 LP	MCHPV X 2015 LP	MCHPV 2021 LP	OHIO 3517 LP
	3.700.0030	Gun 3/8" - M22		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	3.700.0025	Gun RL 30 3/8" M - 1/4" F (only for lance 6.602.0049 - 6.602.0050)		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	4.618.0012	10 m H.P. Hose - 3/8" - Ø 5/16" - 310 bar		•	•	•	•	•	•	•				•	•			
	4.618.0056	20 m H.P. Hose - 3/8" - Ø 5/16" - 400 bar		•	•	•	•	•	•	•				•	•			
	4.618.0057	20 m H.P. Hose - 3/8" - Ø 3/8" - 400 bar									•							
	4.618.0058	10 m H.P. Hose for food industry - 3/8" - Ø 3/8" - 400 bar									•							
	4.618.0050	10 m H.P. Hose - 3/8" F F - Ø 3/8" R2																•
	6.602.0049	mm 1700 S. S. 1/4" M - 1/8" F high/low press. (for det. suction) for gun 3.700.0025		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0050	mm 1700 S. S. 1/4" M - 1/8" F lance with nozzle-holder - for gun 3.700.0025		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0040	Lance Rotox type 1 M22 - 0,45		•	•	•	•	•	•	•				•	•			
	6.602.0041	Lance Rotox type 2 M22 - 0,55				•				•					•			
	6.602.0027	M22 - 0,40 Widia sand-blasting lance		•	•	•	•	•	•	•				•	•			
	6.602.0028	M22 - 0,50 Widia sand-blasting lance				•				•					•			
	6.602.0029	M22 - 0,75 Widia sand-blasting lance									•							•
	3.701.0025	Double lance mm 500 with regulator knob max 250 bar with nozzle holder		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0003	Foam lance max temperature 90° C. For gun M 22 max 250 bar		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0055	Foam lance with regulator max temp. 60° C - with M22 coupling		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0053	Foam lance with regulator max temp. 60° C - M22 coupling with tank 1 lt.		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	3.102.0011	Water filter 3/4" F - 3/4" M 80 microns		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	0.011.0001	Calibrated sand - 6 pieces of 5 kg each		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

• = suitable

Quick coupling kit hose/gun



Quick coupling kit hose/gun - brass - inlet 3/8" F - outlet 3/8" M - 200 bar
Code: 6.608.0003















Quick coupling kit hose/gun - brass - inlet 1/4" F - outlet 1/4" M - 200 bar
Code: 6.608.0002



Quick coupling kit hose/gun - inlet 3/8" F - outlet 3/8" M - 250 bar
Code: 6.602.0021



Accessories Hot Water high-pressure cleaners

		MISSISSIPPI R 1310 XP	DAKOTA R 1509 XP	DAKOTA R 2007 XP	DAKOTA R 1713 XP	NPX 1211 XP	NPX 1813 XP	TEXAS R 1211 XP	TEXAS R 1510 XP	TEXAS R 1711 XP	LIX 1310 LP	LIX 1515 LP	LIX 2015 LP	TERNA 1515 LP	TERNA 2015 LP	TERNA 2021 LP	HYPER L 1211 LP	HYPER L 1515 LP	HYPER L 2015 LP	HYPER L 2021 LP	HYPER T 2015 LP	HYPER T 2515 LP	HPV 1211 LP	HPV 2015 LP	HPV 2021 LP
	3.700.0030	Gun 3/8" - M22	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	3.700.0025	Gun RL 30 3/8" M - 1/4" F (only for lance 6.602.0049 - 6.602.0050)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	4.618.0012	10 m H.P. Hose - 3/8" - Ø 5/16" - 310 bar	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	4.618.0056	20 m H.P. Hose - 3/8" - Ø 5/16" - 400 bar	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	4.618.0057	20 m H.P. Hose - 3/8" - Ø 3/8" - 400 bar	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	4.618.0058	10 m H.P. Hose for food industry - 3/8" - Ø 3/8" - 400 bar	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	4.618.0059	10 m H.P. Hose for steam - 3/8" - Ø 3/8" (MAX 135°C)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0049	mm 1700 S.S. 1/4" M - 1/8" F high/low press. (for det. suction) for gun 3.700.0025	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0050	mm 1700 S.S. 1/4" M - 1/8" F lance with nozzle-holder - for gun 3.700.0025	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0040	Lance Rotox type 1 M22 - 0,45	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0041	Lance Rotox type 2 M22 - 0,55	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0042	Lance Rotox type 2 M22 - 0,55	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0027	M22 - 0,40 Widia sand-blasting lance	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0028	M22 - 0,50 Widia sand-blasting lance	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0029	M22 - 0,75 Widia sand-blasting lance	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	3.701.0025	Double lance mm 500 with regulator knob max 250 bar with nozzle holder	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0003	Foam lance max temperature 90° C. For gun M 22 max 250 bar	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0055	Foam lance with regulator max temp. 60° C - with M22 coupling	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	6.602.0053	Foam lance max temp. 60° C - M22 coupling with tank 1 lt.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	3.102.0011	Water filter 3/4" F - 3/4" M 80 microns	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	0.011.0001	Calibrated sand - 6 pieces of 5 kg each	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

• = suitable

Adapters for high pressure hoses

3/8" M 3/8" M



Code: 3.100.0023

3/8" M M 22



Code: 4.606.0053

1/4" M M 22















Code: 4.006.0062

3/8" M M 22 F



Code: 3.100.0043

Accessories High-pressure cleaners with combustion engine

			THERMIC 5 H	THERMIC 6 S	THERMIC 9 L	THERMIC 10 D	THERMIC 11 H	THERMIC 13 H	THERMIC 10 HW	THERMIC 17 HW
	3.700.0030	Gun 3/8" - M22	•	•	•	•	•	•	•	•
	3.700.0025	Gun RL 30 3/8" M - 1/4" F (only for lance 6.602.0049 - 6.602.0050)	•	•	•	•	•	•	•	•
	4.618.0012	10 m H.P. Hose - 3/8" - Ø 5/16" - 310 bar	•	•	•	•	•	•	•	•
	4.618.0056	20 m H.P. Hose - 3/8" - Ø 5/16" - 400 bar	•	•	•	•	•	•	•	•
	4.618.0059	10 m H.P. Hose for steam - 3/8" - Ø 3/8" (MAX 135°C)							•	•
	6.602.0049	mm 1700 S. S. 1/4" M - 1/8" F high/low press. (for det. suction) for gun 3.700.0025	•	•	•	•	•	•	•	•
	6.602.0050	mm 1700 S. S. 1/4" M - 1/8" F lance with nozzle-holder - for gun 3.700.0025	•	•	•	•	•	•	•	•
	6.602.0040	Lance Rotox type 1 M22 - 0,45				•	•			
	6.602.0041	Lance Rotox type 2 M22 - 0,55				•	•			
	6.602.0027	M22 - 0,40 Widia sand-blasting lance	•	•						
	6.602.0028	M22 - 0,50 Widia sand-blasting lance				•	•			
	6.602.0029	M22 - 0,75 Widia sand-blasting lance					•	•		
	3.701.0025	Double lance mm 500 with regulator knob max 250 bar with nozzle holder	•	•	•	•	•	•	•	•
	6.602.0003	Foam lance max temperature 90° C. For gun M 22 max 250 bar	•	•	•	•	•	•	•	•
	6.602.0054	Foam lance with regulator max temp. 60° C - with quick coupling for gun 3.700.0043					•	•	•	•
	6.602.0055	Foam lance with regulator max temp. 60° C - with M22 coupling	•	•	•					
	6.602.0051	Foam lance with regulator max temp. 60° C - quick coupling for gun 3.700.0043 with tank 1 lt.					•	•	•	•
	6.602.0053	Foam lance with regulator max temp. 60° C - M22 coupling with tank 1 lt.	•	•	•					
	3.102.0011	Water filter 3/4" F - 3/4" M 80 microns	•	•	•	•	•	•	•	•
	0.011.0001	Calibrated sand - 6 pieces of 5 kg each	•	•	•	•	•	•	•	•

• = suitable

Water flow adjuster coupling



Code	Inlet	Outlet	Max. pressure			Flow rate		Temperature	
	A	B	bar	psi	MPa	l/m	GPM	°C	°F
3.703.0023	M22 Ø14	M22F Ø14	280	4061	28	30	7.93	160	320
3.703.0024	1/4" M	M22F Ø14	280	4061	28	30	7.93	160	320
3.703.0009	1/4" M	1/4" F	280	4061	28	30	7.93	160	320

Gun with extensible telescopic lance



Code :
4.018.0067

Spare hose

Code :
3.100.0021


+ Coupling 1/4" M-1/4" M

Code :
3.100.0022

+ Coupling 1/4" M-3/8" M



A:
3/8" M

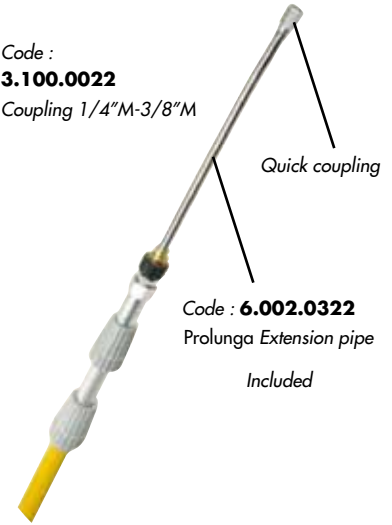

Quick coupling

Code : **6.002.0322**

Prolunga Extension pipe

Included

Code	Pressure			Flow rate		Length		Coupling	Temperature	
	bar	psi	MPa	l/m	GPM	min. mm	max. mm		A	°C
3.749.0488	250	3625	25	40	10.5	2000	5000	3/8" M	150	302

Quick coupling code: 4.607.0275 + adapter for nozzle 1/4" code: 3.100.0032

Quick coupling code: 4.607.0275 + adapter for nozzle 1/8" code: 3.100.0338

Motorized head



for Ohio 3517
Thermic 13H and
Thermic 17 HW
in combination with M24 nipple
cod. 3.749.0320

- S. S. motorized head for case and tank cleaning
- Complete orbital internal coverage
- Complete with nozzles and converter

Motorized head	
code	3.749.0196
operat. pressure	220 bar - 3190 psi
allowed pressure	250 bar - 3625 psi
operat. delivery rate	1260 l/h - 5,56 GPM
nominal temperature	90° C
min. diameter	Ø 40 mm
nozzle type	2 x M4

Floor Cleaning Lance




for Ohio 3517
Thermic 13H and
Thermic 17 HW
in combination with M24 nipple
cod. 3.749.0320



- S. S. floor cleaning lance (nozzle not included)
- Complete with RL 35 gun
- For washing terraces and external floors in general.

Floor Cleaning Lance	
code	6.602.0020
operat. pressure	250 bar - 3625 psi
allowed pressure	280 bar - 4060 psi
operat. delivery rate	1200 l/h - 5,3 GPM
nominal temperature	160° C
nozzle dimension	.060

Stainless steel floor cleaning lance with wheels (without nozzles)

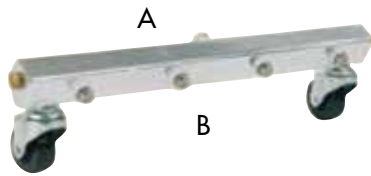

Code	Pressure			Flow rate		Length mm	Coupling		Temperature	
	bar	psi	MPa	l/m	GPM		A	B	°C	°F
6.602.0052	250	3625	25	20	5.29	500	1/4"F	1/8"F	160	320

Pipe cleaning nozzles

	Code	Description	Thread	Type
	3.103.0035	Pipe cleaning nozzle with side holes	3/8"M	0.55
	3.103.0106	Rounded head pipe cleaning nozzle	3/8"M	0.55
	3.103.0107	Pipe cleaning nozzle with side holes	3/8"F	0.55
	3.103.0119	Pipe cleaning nozzle with side holes	1/4"F	0.55

Kit pipe cleaning hose with nozzle



Code	Description	Length m	Max. pressure			Inlet	Outlet
			bar	psi	MPa		
6.608.0054	Kit pipe cleaning hose	10	210	3045	21	M 22 - M	Stainless steel nozzle
6.608.0045	Kit pipe cleaning hose	20	210	3045	21	M 22 - M	Stainless steel nozzle



Code	Description	Length m	Max. pressure			Inlet	Outlet
			bar	psi	MPa		
6.608.0047	Kit pipe cleaning hose	10	210	3045	21	Quick coupling	Stainless steel nozzle
6.608.0048	Kit pipe cleaning hose	20	210	3045	21	Quick coupling	Stainless steel nozzle

Fixed and rotating brushes



Fixed brush



Rotating brush

Fixed and rotating brushes max 250 bar: mm 700, max temperature 90° C, for gun M 22

6.602.0035 Fixed brush with extension pipe mm 700

6.602.0036 Rotating brush with extension pipe mm 700

Food industry high pressure accessories

For food industry



Code	Description
3.700.0022	Gun RL 30 3/8" F - M 24" F
3.701.0020	mm 1050 S. S. - M24" M - 1/8" F lance with nozzle-holder (nozzle not included)
4.618.0058	10 m H. P. Hose - 400 bar 3/8" F - 3/8" F - Ø 3/8" - max 150° C - R2

Steam hose R2 with rubber hose bend Ø 3/8"

For food industry



Code	Max. pressure			Length	Inlet	Outlet	Max. temperature
	bar	psi	MPa				
4.618.0059	400	5801	40	10	3/8" F	3/8" F	135

Wall mount hose reel



Wall mount hose reel with brackets without hose (capability 20 m hose 3/8")

Code	Description	Inlet	Outlet
6.608.0071	Wall mount hose reel with brackets without hose	3/8" F	3/8" F

Automatic hose reel



Automatic hose reel (capability 20 m hose)

Code	Description	Inlet	Outlet
3.749.0508	Varnished steel automatic hose reel	3/8" M	3/8" F
3.749.0510	Stainless steel automatic hose reel	3/8" M	3/8" F
3.749.0509	Varnished steel automatic hose reel with 20mt hose	3/8" F	3/8" F


40 Years of constructive experience...

LavorPRO offers a comprehensive range of pumps and motor pumps constructed and designed to meet any requirement of the market, providing a long-lasting and reliable solution to address cleaning needs ...

No compromises!

LavorPro's offering of pumps and motor pumps intentionally targets a clientèle seeking top quality and durability for this kind of products:

- 4-pole motors: They assure 1450 RPM speed, resulting in a decrease of pump and motor's operating temperatures, reduction in wear of consumables, lower oil deterioration inside the pump.

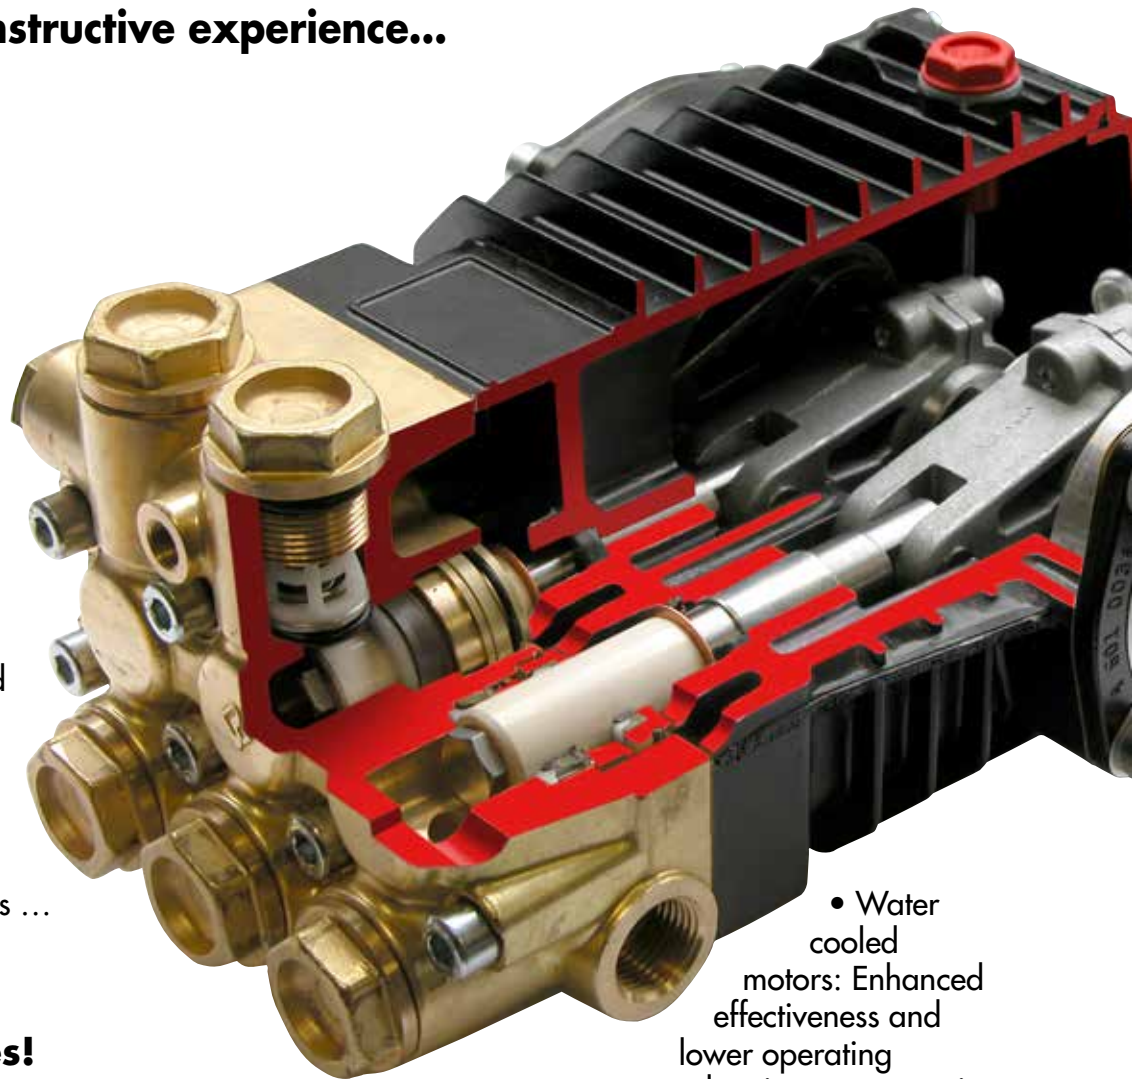

- Water cooled motors: Enhanced effectiveness and lower operating temperatures translate into compact sizes and high performance.


- Elastic coupling: it assures better alignment, dissipation of the heat from the motor rotor, lower stress on bearings, easy disassembly of the pump from the motor.

- Pump body in die cast aluminium: the casing design focuses on assuring stress is reduced to the minimum and operating temperatures are reduced, with the aim of guaranteeing unlimited service life.

- Forged brass pump head: improved mechanical strength, superior resistance to corrosion and oxidation phenomena.
- Nickel plated forged brass (CW5) pump head: the perfect surface finish, jointly with the properties of the plating, assure improved resistance to chemicals and lower chance of deterioration caused by cavitation phenomena.
- Double gasket seal system the choice of the "U" gasket profile represents the maximum quality standard, assuring lower wear due to friction.
- High temperature seals (CW5): They assure optimal durability up to 85° operation.
- Valves with stainless steel plate and spherical seal: high fluid dynamics performance.
- Ceramic pistons (according to the models): to assure longer service life of the pistons and guarantee lower wear of water seals and improved resistance to thermal shocks.
- Double housing connecting rods (CL5-CW 5): ease of maintenance.
- **"READY TO USE"** pumps (CL4): This range provides built-in by-pass valve, low pressure detergent injector, total stop actuation micro-switch, pressure regulation and pressure gauge, making installation easier and speeding up replacement and maintenance operations.



Pumps and motorpumps

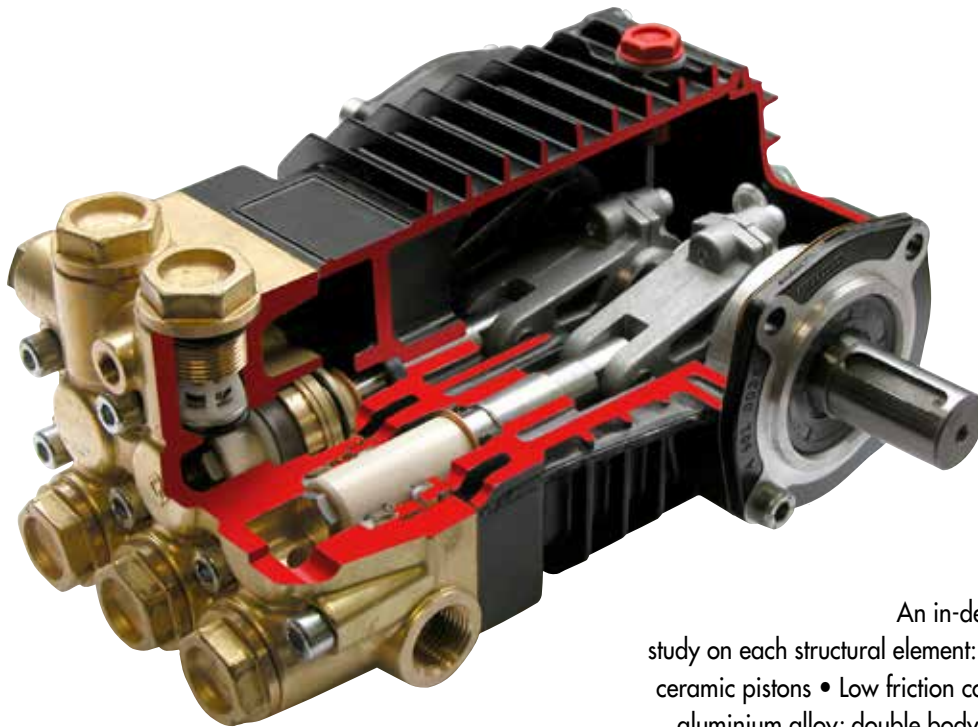


CL5 21-200

An in-depth and comparative study on each structural element:

- Low wear and tear ceramic pistons
- Low friction connecting rod, built in aluminium alloy; double body for easy disassembly
- Minimum charge on the cone-shaped bearings (through electronic calibration of the drive shaft rotation)
- Very low operating temperature, favored by the use of water cooled motor
- Top range up to 21 l/min.

Model	Omnia 12	Omnia 15	CL4	CL5	CW5
Pump type	Axial	Axial	Linear	Linear	Linear
Head	Brass	Brass	Brass	Brass	Brass nickel plated
Pistons	Stainless steel	Ceramic coated	Ceramic coated-Ceramic	Ceramic	Ceramic
Pistons Ø	12 mm	15 mm	15 mm/18 mm	20 mm	20 mm
By-pass valve	Integrated	Integrated	Integrated	Separated	Separated
Pressure regulator	Integrated	Integrated	Integrated	On by-pass	On by-pass
Max operating pressure	140 bar	200 bar	200 bar	200 bar	200 bar
Max delivery rate	9 l/min	13 l/min	15 l/min	21 l/min	21 l/min
Motor	2 poles air cooled	2 poles air cooled	4 poles air cooled 4 poles H ₂ O cooled	4 poles H ₂ O cooled	4 poles H ₂ O cooled
Total Stop	Available	Available	Available	Available	Available

MPBX2 series (Omnia 15 Pump)

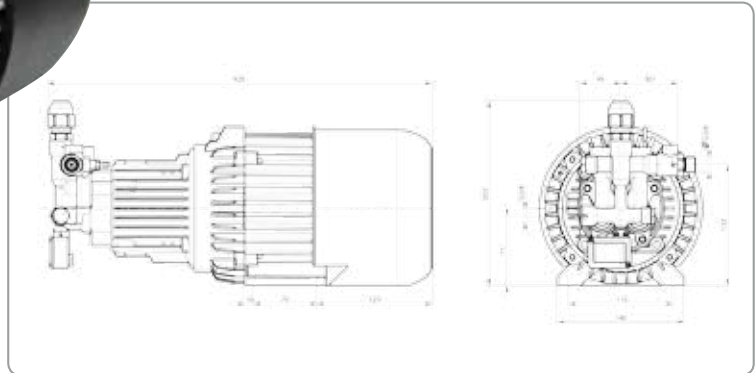


Equipped with:

- High-pressure motor pumps units
- Fixing bracket included

Model	Left shaft ver. Code	RPM	Max. pressure			Flow rate		Requested power kW	Power supply	Weight	
			bar	psi	MPa	l/m	GPM			kg	lbs
MPBX 2-15 11-120	8.680.0046	2800	120	1740	12	11	2.9	3	1Ph 230V~50Hz	20,5	45,2
MPBX 2-15 07-200	8.680.0049	2800	200	2900	20	7	1.8	3	1Ph 230V~50Hz	21	46,2
MPBX 2-15 11-150	8.680.	2800	150	2175	15	11	2.9	4	3Ph 400V~50Hz	21	46,2

MPW5 series



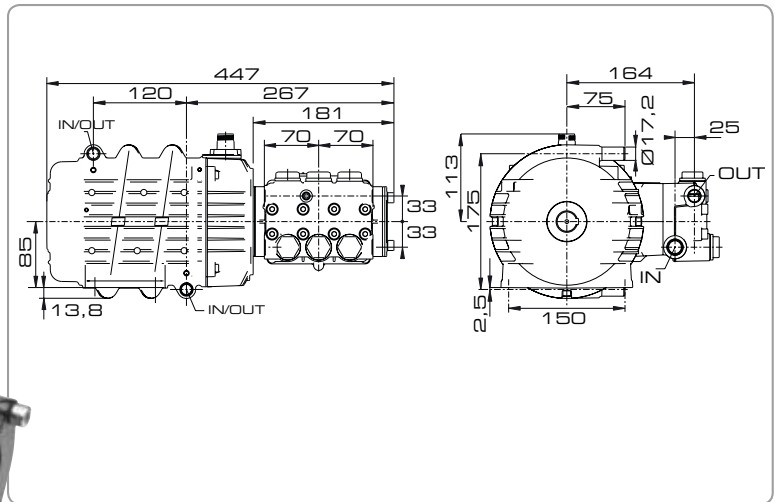


Equipped with:

- Fixing bracket included

Model	Left shaft ver. Code	RPM	Max. pressure			Flow rate		Requested power kW	Power supply	Weight	
			bar	psi	MPa	l/m	GPM			kg	lbs
MPW 54-20 15-150	8.680.0022	1450	150	2175	15	15	4	5	3Ph Y 400V~50Hz	32	70,5
MPW 54-20 15-200	8.680.0023	1450	200	2900	20	15	4	7	3Ph Y 400V~50Hz	34	74,9

MPWJ5 series

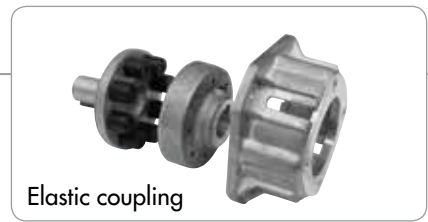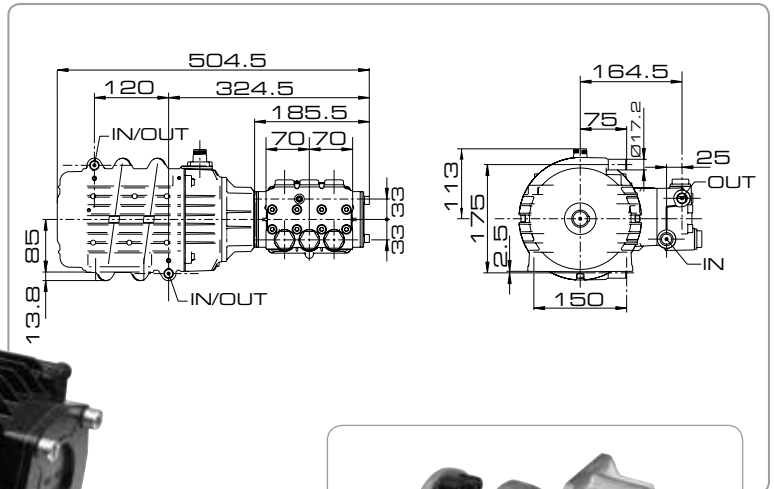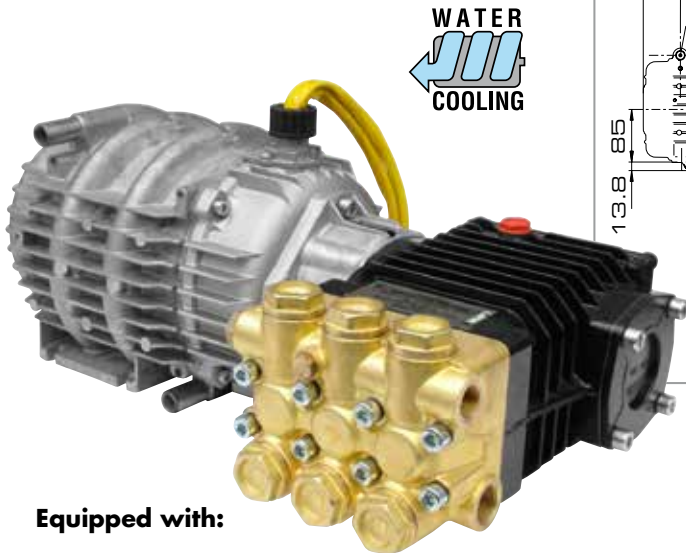


Equipped with:

- High-pressure pumps units with elastic coupling
- Fixing bracket included

Model	Left shaft ver. Code	RPM	Max. pressure			Flow rate		Requested power kW	Power supply	Weight	
			bar	psi	MPa	l/m	GPM			kg	lbs
MPWJ 54-20 15-150	8.680.0028	1450	150	2175	15	15	4	5	3Ph Y 400V~50Hz	32,5	71,6
MPWJ 54-20 15-200	8.680.0029	1450	200	2900	20	15	4	7	3Ph Y 400V~50Hz	34,5	76
MPWJ 54-20 21-200	8.680.0030	1450	200	2900	20	21	5,5	9,4	3Ph Y 400V~50Hz	37,5	82,6

MP4 series



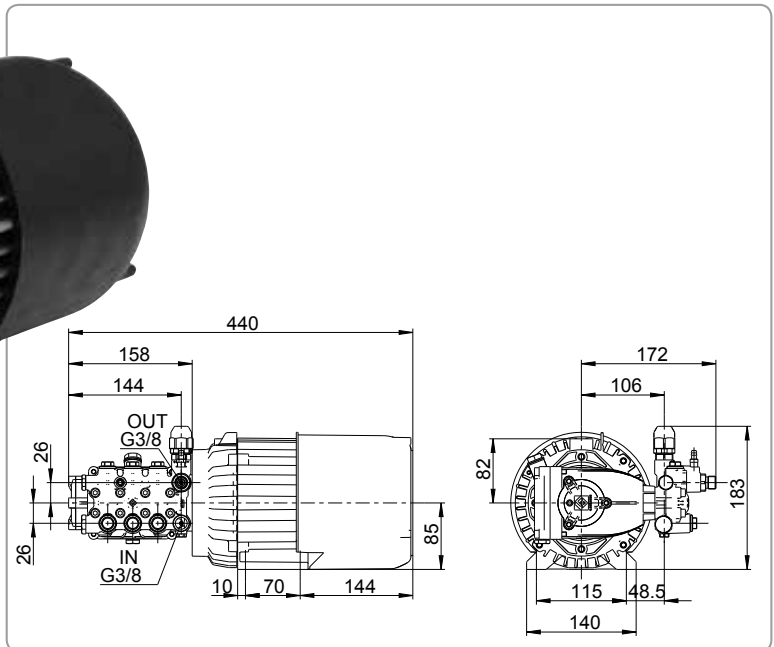


Equipped with:

- Pressure adjuster included

Model	Left shaft ver. Code	RPM	Max. pressure			Flow rate		Requested power kW	Power supply	Weight	
			bar	psi	MPa	l/m	GPM			kg	lbs
MP 34-15 11-120	8.680.0100	1450	120	1740	12	11	2,9	3	1Ph 230V~50Hz	22	49,2
MP 34-15 11-120	8.680.0101	1750	120	1740	12	11	2,9	3	1Ph 220V~60Hz	22	49,2
MP 34-15 11-150	8.680.0102	1450	150	2175	15	11	2,9	4	3Ph Y 400V~50Hz	22,5	49,6
MP 34-15 11-150	8.680.0103	1750	150	2175	15	11	2,9	4	3Ph Y 400V~60Hz	22,5	49,6

MPJ4 series

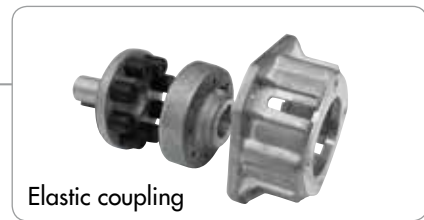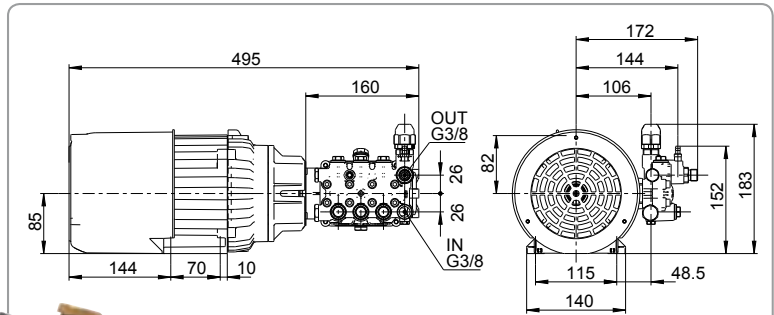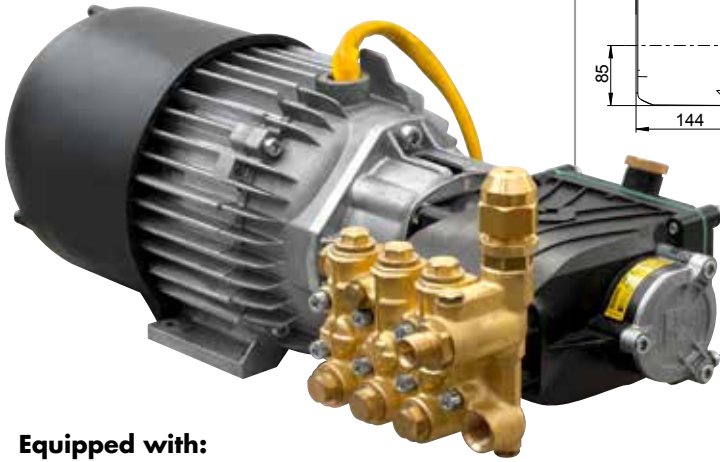


Equipped with:

- High-pressure pumps units with elastic coupling
- Pressure adjuster included

Model	Left shaft ver. Code	RPM	Max. pressure			Flow rate		Requested power kW	Power supply	Weight	
			bar	psi	MPa	l/m	GPM			kg	lbs
MPJ 34-15 11-120	8.680.0104	1450	120	1740	12	11	2,9	3	1Ph 230V~50Hz	22,5	49,6
MPJ 34-15 11-120	8.680.0105	1750	120	1740	12	11	2,9	3	1Ph 220V~60Hz	22,5	49,6
MPJ 34-15 15-150	8.680.0106	1450	150	2175	15	11	2,9	4	3Ph Y 400V~50Hz	23	50,6
MPJ 34-15 15-150	8.680.0107	1750	150	2175	15	11	2,9	4	3Ph Y 400V~60Hz	23	50,6

MPW4 series


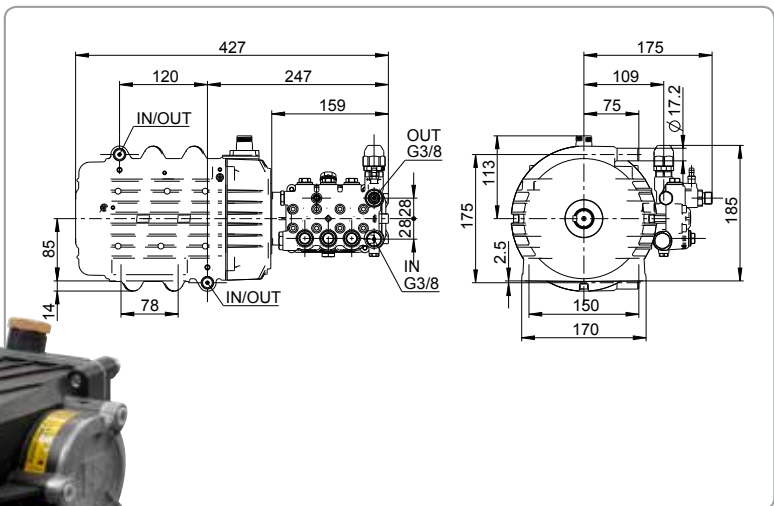


Equipped with:

- Fixing bracket included
- Pressure adjuster included

Model	Left shaft ver. Code	RPM	Max. pressure			Flow rate		Requested power kW	Power supply	Weight	
			bar	psi	MPa	l/m	GPM			kg	lbs
MPW 34-18 15-150	8.680.0108	1450	150	2175	15	15	4	5	3Ph Y 400V~50Hz	28,8	63,5
MPW 34-18 15-200	8.680.0109	1450	200	2900	20	15	4	7	3Ph Y 400V~50Hz	30,8	67,9
MPW 34-15 13-200	8.680.0110	1750	200	2900	20	13	3,4	8,4	3Ph Y 400V~60Hz	28,5	62,8


MPWJ4 series

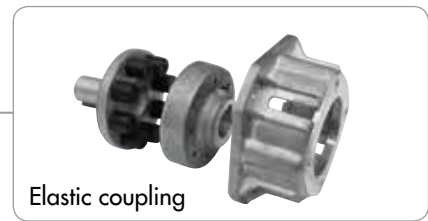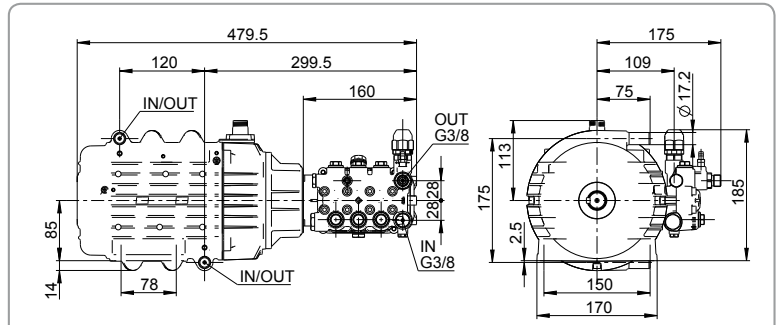

Equipped with: • High-pressure pumps units with elastic coupling • Fixing bracket included • Pressure adjuster included

Model	Left shaft ver. Code	RPM	Max. pressure			Flow rate		Requested power kW	Power supply	Weight	
			bar	psi	MPa	l/m	GPM			kg	lbs
MPWJ 34-18 15-150	8.680.0111	1450	150	2175	15	15	4	5	3Ph Y 400V~50Hz	29,3	64,6
MPWJ 34-18 15-200	8.680.0112	1450	200	2900	20	15	4	7	3Ph Y 400V~50Hz	31,3	69
MPWJ 34-15 13-200	8.680.0113	1750	200	2900	20	13	3,4	8,4	3Ph Y 400V~60Hz	29	63,9

Top/High/Low series

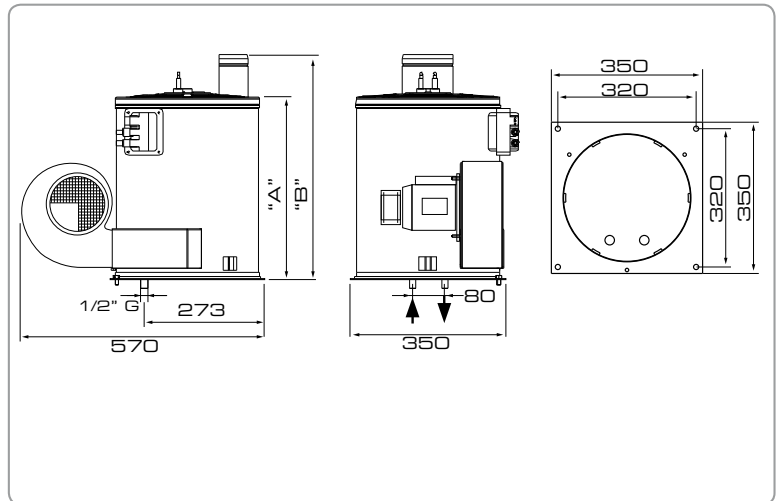


(* Available in various voltages)

Equipped with:

- Complete boilers for high-pressure cleaners

Model	Code	Max. pressure			Flow rate		Requested power W	Power supply (*)	Thermal power	Coil length	Dimension		Weight	
		bar	psi	MPa	l/m	GPM					kg	lbs		
Top	8.690.0010	200	2900	20	12	3.17	300	230V ~ 50Hz	49000 Kcal/h	20 m	405 mm (A) - 510 mm (B)	38	85,9	
Low	8.690.0001	200	2900	20	15	3.96	300	230V ~ 50Hz	63000 Kcal/h	29,5 m	465 mm (A) - 565 mm (B)	48,5	106,8	
High	8.690.0002	200	2900	20	21	5.55	300	230V ~ 50Hz	63000 Kcal/h	36,5 m	600 mm (A) - 690 mm (B)	54	120	

High 08/Low 08 series

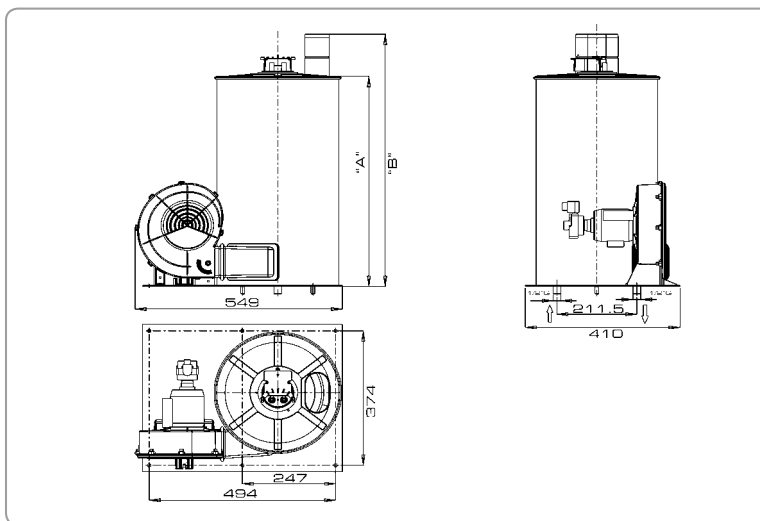

(*) Available in various voltages

Equipped with:

- Complete boilers for high-pressure cleaners

Model	Code	Max. pressure			Flow rate		Requested power	Power supply (*)	Thermal power	Coil lenght	Dimension		Weight	
		bar	psi	MPa	l/m	GPM					W	kg	lbs	
Low 08	8.690.0069	200	2900	20	15	3.96	300	230V ~ 50Hz	49.000 Kcal/h	28 m	471 mm (A) - 587 mm (B)	50	110,2	
High 08	8.690.0070	200	2900	20	21	5.55	300	230V ~ 50Hz	73.500 Kcal/h	34 m	586 mm (A) - 702 mm (B)	62,4	137,5	

LAVORWASH
SERVICE

www.lavorservice.com



The Lavor Service catalogue cod. 7.199.1090 is available, offering a wide range of accessories and universal spare parts compatible with most important branded products on the market. Moreover, to support the daily job of our partners, we created a special software providing information on: standard accessories supplied of all LAVORWASH products since 1975 and set for ordinary and extraordinary maintenance.

The software can be downloaded for free on-line on the website:
www.lavorwash.com/Sales Tools/lavorservice.



Power, air suction, depression: which technical data is most important?

The right technical data of a vacuum cleaner is the vacuum efficiency, that is the mix of different values, i.e. air suction, motor power and depression. Air suction is the vacuumed air volume, commonly expressed in litres per seconds (l/sec) and it is the result of the average air speed multiplied by hose diameter. The depression is the vacuum power (it can be defined as the vacuum power to collect dirt) and it is commonly expressed in kPA or in mbar. It is an inverse relation to air suction: the narrower the flex diameter, the least vacuumed air volume but the best strength to pick up dirt.

Power motor is expressed in Watt and it is not proportional to vacuum efficiency!

If the vacuum cleaner is not well-done, it wastes a lot of electric power without having the best performances possible. Summing up, the vacuum cleaner efficiency is a relationship between air suction (resulting in multiplication of pressure and air suction) and motor power. All our vacuum cleaners have a top efficiency and are manufactured considering essence and user's benefit.

Fixed or tilting trolley, which one to choose?

The choice of the trolley must be made considering the type of use needed. Generally, tilting trolley is much more useful to collect dust and solids, because the tilting tank make it easier

the emptying or pouring. The fixed trolley is better for liquids vacuuming, because it is equipped with drain hose system, emptying is fast and step by step, avoiding the effort of lifting the tank.

What kind of tank material is to be preferred?

Our vacuum cleaner range includes plastic tanks (polypropylene or PP) or stainless steel tanks. The PP tank is flexible, shock proof and resistant to chemical products. It is recommended for frequent moving uses or vacuuming of particularly aggressive chemicals (for example in combination with a single disc machine). The stainless steel tank is more rigid, steadier, resistant to mechanical abrasion and it is aesthetically agreeable. It is recommended for static use, with abrasive materials or in a public place.



Number of motors:

It explains how

many motors there are in the vacuum cleaner. Ignition is independent in order to increase progressively the performances. The working system (whenever it is more than one) is in parallel, so the air suction increases and the depression is steady whenever the motors are progressively switched on.



HEPA filter

High Efficiency Particulate Arrestance. Hepa filter is 99,97% efficient until 0,3 micron impurities.



Multipurpose washable filter

It combines all the advantages of the cartridge filter but with the plus that it can vacuum both dry and wet at the same time. It can be washed with tap water.



Anti electrostatic current device

Dust rubbing at high speed against vacuum cleaner walls creates a magnetic field that neutralizes on the user with small and annoying discharges also through plastic material. This certified system removes this phenomenon on the machine, granting best comfort and safety for the user.



Filter shaker

It clears filter from dust without touching it or opening the vacuum cleaner; the vacuum efficiency is kept at max.



Foam system:

the machine is equipped with connection for compressed air and pressure gauge for foam cleaning. Using the lance with the hose a thick foam can be produced that will stay on the dirty components, giving more effectiveness to the detergent.



Paper collector filter

Allows filtering and collection (with a valve) of rough dirt without dirty the tank whenever it is time to replace it. It is useful for dry waste, also in combination of other thinner filters.




Cloth filter

The cloth consistency and its shape allow a simple cleaning phase and the re-usage of the filter. It can be used only for vacuuming dry waste; if combined with nylon filter it is possible to work for a longer period of time.



Cartridge filter

The continuous folders arranged in circle allow a higher filtering surface in a smaller area. More cleaning autonomy with a thin filtering action. It can be used only for vacuuming dry waste and it is re-usable.

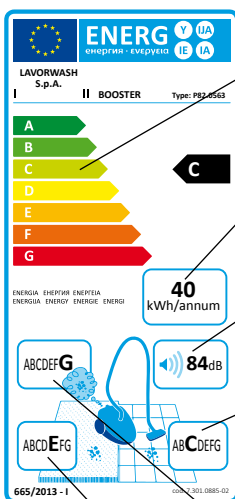

The energy rating

Based primarily on energy consumption, with a penalty for low pick-up

Annual energy usage

The amount of energy the vacuum will use over the course of a year.

Noise

The noise level produced by the machine in decibels.

Pick-up Hard floors/crevices

The rating of how much dust the machine picks up from hard floors and crevices.

Emissions

The amount of dust in air emitted from the machine's exhaust.

Pick-up - Carpets

The rating of how much dust the machine picks up from carpets.

Nomenclature

Windy 365 IF

Number of motors

Tank capacity (litres)

F = Fixed
R = Tilting

P = Plastic
I = Stainless steel



Silent FR Silent Whisper V8 Pro Worker Windy 120 IF Windy 130 IF Windy 265 PF Windy 265 IF Windy 365 IF Windy 278 IF Windy 378 IR Zeus IF

Code	Model	Page	Voltage	Motor power	Column depression	Air suction	Tank capacity	Noise level	Packaging L x l x H	Packaging weight	Packaging weight	Pieces for pallet
			V - Hz	W / W max	kPa/mmH ₂ O	l/s	l	76 dB (A)	cm	kg	lbs	N°
8.246.0007	SILENT FR	75	220/240V - 50/60Hz	800 / 1000	24 / 2400	44 l/s	12 l	78 dB (A)	39x37x47	7,4	16	30
8.246.0001	SILENT	76	220/240V - 50/60Hz	800 / 900	24 / 2400	44 l/s	12 l	72 dB (A)	39x39x42	7,4	16	30
8.214.0501	WHISPER V8	77	230/240V - 50Hz	1100 / 1300	27 / 2700	56 l/s	15 l	76 dB (A)	49x39x42	9,5	20	20
0.052.0004	PRO WORKER	79	220/240V - 50/60Hz	1200 / 1400	24 / 2400	70 l/s	30 l	75 dB (A)	51x36x56	11	24	-
8.249.0001	WINDY 120 IF	80	220/240V - 50/60Hz	1200 / 1400	24 / 2400	65 l/s	20 l	79 dB (A)	39x40x54	10	22	24
8.250.0001	WINDY 130 IF	81	220/240V - 50/60Hz	1200 / 1400	24 / 2400	65 l/s	30 l	79 dB (A)	39x40x79	11	24	15
8.239.0008	WINDY 265 PF	82	220/240V - 50/60Hz	2000 / 2400	22 / 2200	130 l/s	65 l	79 dB (A)	60x48x87	18,8	41	8
8.239.0001	WINDY 265 IF	83	220/240V - 50/60Hz	2000 / 2400	22 / 2200	130 l/s	65 l	79 dB (A)	60x48x87	19,8	44	8
8.240.0001	WINDY 365 IR	84	220/240V - 50/60Hz	3000 / 3600	22 / 2200	195 l/s	65 l	79 dB (A)	65x55x104	25,5	56	4
8.247.0001	WINDY 278 IF	85	220/240V - 50/60Hz	2000 / 2400	22 / 2200	130 l/s	78 l	79 dB (A)	75x60x103	29,6	65	4
8.248.0001	WINDY 378 IR	86	220/240V - 50/60Hz	3000 / 3600	22 / 2200	195 l/s	78 l	79 dB (A)	75x60x103	30,5	67	4
8.215.0501	ZEUS IF	88	220/240V - 50/60Hz	1200 / 1400	24 / 2400	53 l/s	50 l	71 dB (A)	64x54x92	21,5	47	4



Domus IF Domus IR Taurus PR Taurus IR Taurus IR 2 Way GBP 20 Pro Jupiter Apollo IF Solaris IF Constellation IR Windy IE Foam Windy IE Foam Compressor

Code	Model	Page	Voltage	Motor power	Column depression	Air suction	Tank capacity	Noise level	Packaging L x l x H	Packaging weight	Packaging weight	Pieces for pallet
			V - Hz	W / W max	kPa/mmH ₂ O	l/s	l	dB (A)	cm	kg	lbs	N°
8.216.0502	DOMUS IF	89	220/240V - 50/60Hz	2000 / 2400	22 / 2200	108 l/s	78 l	74 dB (A)	75x60x103	30,5	67	4
8.213.0501	DOMUS IR	90	220/240V - 50/60Hz	2000 / 2400	22 / 2200	108 l/s	78 l	74 dB (A)	75x60x103	33,5	74	4
8.212.0508	TAURUS PR	91	220/240V - 50/60Hz	3000 / 3600	22 / 2200	162 l/s	78 l	76 dB (A)	75x60x103	32,5	71	4
8.212.0501	TAURUS IR	92	220/240V - 50/60Hz	3000 / 3600	22 / 2200	162 l/s	78 l	76 dB (A)	75x60x103	34,5	76	4
8.212.0523	TAURUS IR 2 Way	93	220/240V - 50/60Hz	3000 / 3600	22 / 2200	162 l/s	78 l	76 dB (A)	75x60x103	32	70	4
8.204.0066	GBP 20 Pro	95	230V - 50Hz	1200 / 1400	27 / 2700	70 l/s	20 l	75 dB (A)	40x39x64	9,5	20,9	
0.065.0001	JUPITER	96	230V - 50Hz	1100	23 / 2300	50 l/s	6,5 l	70 dB (A)	55x35x64	14	31	12
8.220.0501	APOLLO IF	97	220/240V - 50/60Hz	1200 / 1400	21,6 / 2200	53 l/s	50 l	71 dB (A)	64x54x92	24	53	4
8.221.0508	SOLARIS IF	98	230V - 50Hz	2200 / 2400	22 / 2200	108 l/s	78 l	74 dB (A)	75x60x103	37	82	4
8.221.0518	COSTELLATION IR	99	230V - 50Hz	2200 / 2400	22 / 2200	108 l/s	78 l	74 dB (A)	75x60x103	37	82	4
8.239.0017	WINDY IE Foam	100	220/240V - 50/60Hz	2000 / 2400	22 / 2200	130 l/s	65 l	79 dB (A)	65x55x104	26,5	58,5	4
8.239.0018	WINDY IE Foam Compressor	102	220/240V - 50/60Hz	2000 / 2400	22 / 2200	130 l/s	65 l	79 dB (A)	65x55x104	27	59,5	4

**Professional ultra silent vacuum cleaners
LavorPro were conceived to meet the needs
of floor care sector.**



Compact and powerful,
Silent and Whisper are surprisingly light and easy to handle but at the same time effective,
thanks to the single-stage high-efficiency motor.
They melt successfully the main quality of professional products together with the indisputable
advantages of small size, without penalizing the capacity of the collection tank.
Effective filtering and silenced operation are the salient features of this mini-range, ensured
by the ultra-silenced motor.
They are equipped with a wide range of accessories and are ideal for professionals who are
looking for performance and reliability.
Silent and Whisper are perfect for small shops, cleaning contractors as well as car washes or
supermarkets, schools, hospitals, gyms, hotels, bars and restaurants.

Silent FR

LONG LIFE MOTOR

NEW




Standard equipment:

• 5.209.0220
2 m flexible hose
with valve ø32



• 3.753.0138
2X aluminium
pipe ø32



• 3.754.0269
Flat lance ø32



• 3.754.0270
Round brush ø32



• 3.754.0267 Combined
brush floor/carpet ø32



• 3.754.0268 Nozzle ø32



• 3.752.0279
Microfiber collector filter
HEPA flow



• 5.212.0163 HEPA filter




• High visibility safety power cable 12 m

Optional:

- code. 5.212.0023 Paper collector filter set (10 pcs)
- code. 5.212.0149 Microfiber collector filter set (10 pcs)
- code. 6.205.00199 Paper collector filter set (300 pcs)
- code. 6.205.00200 Paper collector filter set (500 pcs)
- code. 3.754.0081 Brush carpet Turbo brush Type 2



Watch the video on youtube:
www.youtube.com/lavorpro

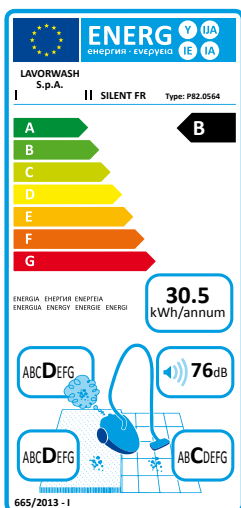

Equipped with:

- Silenced single stage motor (high efficiency).
- Integrated accessory holder.
- Shock and overturn proof design.
- 12 litre plastic tank (PP)
- HEPA filter
- Rotating ON/OFF switch
- Microfiber collector filter HEPA flow
- High visibility safety power cable 12 m.

Silent FR

code	8.246.0007
voltage	220-240V ~ 50-60Hz
n°motors - power	1 - 800 W
column depression	24 kPa/2400 mmH ₂ O
air suction	44 l/s
total volume	12 l.
dimension/weight	39x39x42 cm / 6,8 kg

Silent

**LONG LIFE
MOTOR**

1
MOTOR



12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L

12 L




Standard equipment:

- 5.209.0210 Hose 2 m 
- 6.205.0187 
- 3.754.0005 
- 3.754.0015 
- 3.754.0263 
- 3.754.0004 
- 3.752.0115 
- 5.209.0207 
- Power cable 7,5 m

Optional:

- code. 5.212.0023 Paper collector filter set (10 pcs)
- code. 5.212.0149 Microfiber collector filter set (10 pcs)
- code. 6.205.00199 Paper collector filter set (300 pcs)
- code. 6.205.00200 Paper collector filter set (500 pcs)
- code. 3.754.0081 Brush carpet Turbo brush Type 2
- code. 5.212.0163 HEPA filter

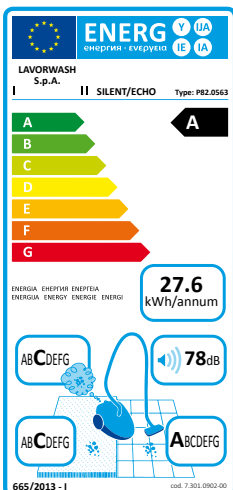

Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- Silenced single stage motor (high efficiency).
- Integrated accessory holder.
- Shock and overturn proof design.
- 12 litre plastic tank (PP)
- Cloth filter.
- Rotating ON/OFF switch
- Paper collector filter.

	Silent
code	8.246.0001
voltage	230-240V ~ 50Hz
n°motors - power	1 - 800 W
column depression	24 kPa/2400 mmH ₂ O
air suction	44 l/s
total volume	12 l.
dimension/weight	39x39x42 cm / 6,8 kg

Whisper V8



Standard equipment:

• 5.209.0077 Hose 2,5 m



• 3.753.0103



• 3.754.0005



• 3.754.0015



• 3.754.0205



• 3.754.0004



• 3.752.0115



• 3.752.0093




• Power cable 15 m

Optional:

- code. 3.752.0092 HEPA filter
- code. 5.212.0023 Paper collector filter set (10 pcs)
- code. 3.754.0081 Brush carpet Turbo brush Type 2
- code. 5.212.0149 Microfiber collector filter set (10 pcs)

Equipped with:

- Ultra silenced single stage motor (high efficiency).
- Paper and cartridge filter. • Full collector filter indicator.
- Exhaust air filter. Integrated accessory holder. • Quick power cable (15 m) replacing system. • Shock & overturn proof design. • Traceless wheels.

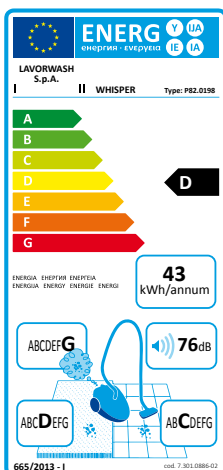

Whisper V8

code	8.214.0501
voltage	230-240V ~ 50Hz
n°motors - power (max)	1 - 1100 (1300) W
column depression	26,5 kPa/2700 mmH ₂ O
air suction	56 l/s
total volume/dust	15 l./10 l.
dimension/weight	47x34x36 cm / 5,5 kg

WINDY: New commercial wet & dry range of vacuum cleaners



WINDY range is the commercial vacuum cleaners line suitable for wet and dry applications: three models equipped with 1 up to 3 professional single stage motor (from 1,2 up to 3,6 kW), stainless steel or anti shock plastic tank, tilting or fixed tank: WINDY are mainly designed for daily light industrial use and are perfectly suited to the most common demand of cleaning contractors, garages, workshops etc...

They are equipped with the new manual RF (reverse flow) filter cleaning system, granting high cleaning efficiency and longer lifespan of the motors.


Practical in every situation, the new WINDY range offers accessories holder, cable holder and a new rotating ON/OFF switch, simple and resistant to daily use.

Equipped with professional accessories and professional filter, WINDY is the answer to your requests!



PRO Worker EM

Wet & Dry vacuum cleaner with power tool socket with remote control and automatic filter shaker



NEW

AUTOMATIC ON/OFF



MAX 2200 W




Standard equipment:

• 0.952.0058



• 6.205.0109



• 3.754.0168



• 3.754.0169



• 3.754.0170



• 3.754.0005



• 4.208.0063



• 0.952.0054



• 2x 3.752.0292



• 0.952.0055



• 0.952.0056



• 0.952.0057



• 7.5 m neoprene power cable



Optional:

• code. 5.212.0165 Microfiber collector filter set (5 pcs)

Equipped with:

- 1 by pass motors
- Suction system with by-pass cooling
- Power tool socket (max 2200 W)
- Automatic ON/OFF filter shaker
- Shock proof tank (PP)
- Liquid float valve
- Dirty filter indicator
- Rotary switch
- Hepa filter
- Microfiber collector filter
- HEPA suction filter with NANO TECH coating
- Extension steel pipe
- Multidiameter tool adapter
- 7.5 m neoprene power cable.
- Traceless wheels
- Accessories Ø35.

PRO Worker EM	
code	0.052.0004
voltage	220-240V ~ 50-60Hz
n°motors - power	1 - 1400 W
column depression	24 kPa/2400 mmH ₂ O
air suction	70 l/s
volume	30 l.
dimension/weight	51x36x56 cm/11 kg

Windy 120 IF



Standard equipment:

- 5.209.0077 Hose 2,5 m



- 6.205.0109



- 3.754.0005



- 3.754.0015



- 3.754.0004



- 3.754.0168



- 3.754.0169



- 3.754.0170



- 5.209.0009



- 3.752.0175



- 3.752.0114



- Power cable 7,5 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.212.0043 Cloth filter
- code. 3.754.0205 Brush floor/carpet with wheels
- code. 3.754.0081 Brush carpet Turbo brush Type 2
- code. 5.212.0029 Cartridge filter
- code. 5.212.0037 HEPA filter
- code. 5.212.0040 Washable filter

Equipped with:

- High efficiency by pass motor. • Suction system with by-pass cooling.
- S. S. tank. • Shock proof trolley. • Liquid float valve. • Cloth filter. • 7,5 m power cable. • Accessories Ø 35. • Handy accessory holder.

	Windy 120 IF
code	8.249.0001
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	1 - 1200 (1400) W
column depression	24 kPa/2400 mmH ₂ O
air suction	65 l/s
total volume/dust/liquid	20 l./14 l./16 l.
dimension/weight	35x35x66 cm / 8 Kg

Windy 130 IF



Standard equipment:

- 5.209.0077 Hose 2,5 m



- 6.205.0109



- 3.754.0005



- 3.754.0015



- 3.754.0004



- 3.754.0168



- 3.754.0169



- 3.754.0170



- 5.212.0040



- 3.752.0175



- 3.752.0114



- Power cable 7,5 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.212.0043 Cloth filter
- code. 3.754.0205 Brush floor/carpet with wheels
- code. 3.754.0081 Brush carpet Turbo brush Type 2
- code. 5.212.0029 Cartridge filter
- code. 5.212.0037 HEPA filter
- code. 5.212.0040 Washable filter

Equipped with:

- High efficiency by pass motor. • Suction system with by-pass cooling. • S. S. tank.
- Shock proof trolley. • Liquid float valve. • Washable filter. • 7,5 m power cable.
- Accessories Ø 35. • Handy accessory holder.

Windy 130 IF	
code	8.250.0001
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	1 - 1200 (1400) W
column depression	24 kPa/2400 mmH ₂ O
air suction	65 l/s
total volume/dust/liquid	30 l./15 l./17 l.
dimension/weight	37x37x71 cm / 8,5 Kg

Windy 265 PF



Standard equipment:

- 5.209.0021 Hose 2,5 m



- 6.205.0126



- 3.754.0048



- 3.754.0049



- 3.754.0083



- 3.754.0084



- 3.754.0085



- 6.205.0151



- Power cable 7,5 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.209.0177 Cloth filter for fine dust
- code. 5.212.0093 Nylon filter



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- 2 high efficiency by pass motors.
- Suction system with by-pass cooling.
- Filter cleaning system.
- Plastic tank (PP).
- Static electric shock inhibitor.
- Shock proof trolley.
- Liquid float valve.
- Cloth filter.
- 7,5 m power cable.
- Traceless wheels.
- Accessories Ø 40.
- Handy accessory holder.

Windy 265 PF	
code	8.239.0008
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	2 - 2000 (2400) W
column depression	22 kPa/2200 mmH ₂ O
air suction	130 l/s
total volume/dust/liquid	65 l./30 l./40 l.
dimension/weight	44x46x96 cm / 13 kg

Windy 265 IF



Standard equipment:

- 5.209.0021 Hose 2,5 m



- 6.205.0126



- 3.754.0048



- 3.754.0049



- 3.754.0083



- 3.754.0084



- 3.754.0085



- 6.205.0151



- Power cable 7,5 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.209.0177 Cloth filter for fine dust
- code. 5.212.0093 Nylon filter



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- 2 high efficiency by pass motors. • Suction system with by-pass cooling. • Filter cleaning system. • S. S. tank. • Static electric shock inhibitor. • Shock proof trolley.
- Liquid float valve. • Cloth filter. • 7,5 m power cable. • Traceless wheels.
- Accessories Ø 40. • Handy accessory holder.

	Windy 265 IF
code	8.239.0001
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	2 - 2000 (2400) W
column depression	22 kPa/2200 mmH ₂ O
air suction	130 l/s
total volume/dust/liquid	65 l./30 l./40 l.
dimension/weight	44x46x96 cm / 14,5 kg

Windy 365 IR



Standard equipment:

- 5.209.0021 Hose 2,5 m



- 6.205.0126



- 3.754.0048



- 3.754.0049



- 3.754.0083



- 3.754.0084



- 3.754.0085



- 6.205.0151



- Power cable 7,5 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.209.0177 Cloth filter for fine dust
- code. 5.212.0093 Nylon filter



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- 3 high efficiency by pass motors. • Suction system with by-pass cooling. • Filter cleaning system. • S. S. tank. • Static electric shock inhibitor. • Tilting tank. • Fully removable tank. • Shock proof trolley. • Liquid float valve. • Cloth filter. • 7,5 m power cable. • Traceless wheels. • Accessories Ø 40. • Handy accessory holder.

	Windy 365 IR
code	8.240.0001
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	3 - 3000 (3600) W
column depression	22 kPa/2200 mmH ₂ O
air suction	195 l/s
total volume/dust/liquid	65 l./30 l./40 l.
dimension/weight	62x51x100 cm / 20 kg

Windy 278 IF



Standard equipment:

- 5.209.0021 Hose 2,5 m



- 6.205.0126



- 3.754.0048



- 3.754.0049



- 3.754.0083



- 3.754.0084



- 3.754.0085



- 5.509.2176



- Power cable 7,5 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.509.1405 Cloth filter for fine dust
- code. 5.212.0093 Nylon filter



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- 2 high efficiency by pass motors. • Suction system with by-pass cooling.
- Filter cleaning system. • S. S. tank. • Static electric shock inhibitor. • Shock proof trolley. • Liquid float valve. • Cloth filter. • 7,5 m power cable. • Traceless wheels.
- Accessories Ø 40. • Handy accessory holder.

	Windy 278 IF
code	8.247.0001
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	2 - 2000 (2400) W High efficiency motor.
column depression	22 kPa/2200 mmH ₂ O
air suction	130 l/s
total volume/dust/liquid	78 l./35 l./48 l.
dimension/weight	62x51x96 cm / 23 kg

Windy 378 IR



Standard equipment:

- 5.209.0021 Hose 2,5 m



- 6.205.0126



- 3.754.0048



- 3.754.0049



- 3.754.0083



- 3.754.0084



- 3.754.0085



- 5.509.2176



- Power cable 7,5 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.509.1405 Cloth filter for fine dust
- code. 5.212.0093 Nylon filter

Equipped with:

- 3 high efficiency by pass motors. • Suction system with by-pass cooling. • Filter cleaning system. • S. S. tank. • Static electric shock inhibitor. • Tilting tank. • Fully removable tank. • Shock proof trolley. • Liquid float valve. • Cloth filter. • 7,5 m power cable. • Traceless wheels. • Accessories Ø 40. • Handy accessory holder.



Watch the video on youtube:
www.youtube.com/lavorpro

Windy 378 IR	
code	8.248.0001
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	3 - 3000 (3600) W High efficiency motor.
column depression	22 kPa/2200 mmH ₂ O
air suction	195 l/s
total volume/dust/liquid	78 l./35 l./48 l.
dimension/weight	62x51x99 cm / 26 kg

Heavy duty range



The Professional range of LAVOR PRO vacuum cleaners provides the solution for every kind of heavy duty daily use.

The models of the wet and dry series are equipped with 1 up to 3 double stage motor (1.2 to 3.6 kW), different tank capacities (50 or 78 l.), tilting or fixed tank and PP antishock or stainless steel tanks.

Designed to be user friendly, they are equipped with ergonomic handle, big wheels and stable trolley offering the final answer to the needs of cleaning contractors, industries, workshops, car washing station etc. The accessories sets allowing all the different operation of wet and dry suction, are designed to be stressless for the end user (using longer extension pipes) and can easily fit and change quickly one to the other.

The antishock feature has to be considered a big advantage when metal dust, flour and all the different types of dirt creating ESD electrostatic discharge are collected inside the tank. This feature avoids shocks to the end user, making usage easier.

Wide cloth filter bag (standard) grants good performances of the motor also when it is used for a long period; HEPA, cartridge, nylon, sponge and collector bag can be equipped easily (Optional).

The filter area is reachable easily and the wide float seat grants stability on the floor during filter cleaning session.

The ANTIFOAM device (optional) must be used in case of mixture chemical/water suction, avoiding the foam to reach motor.

Zeus IF



Standard equipment:

- 5.209.0021 Hose 2,5 m



- 6.205.0126



- 3.754.0048



- 3.754.0049



- 3.754.0185



300 mm

- 3.754.0169



- 3.754.0170



- 6.205.0011



- 6.205.0008



- Power cable 10 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.212.0094 Nylon filter
- code. 5.212.0020 Washable filter
- code. 5.212.0006 Cartridge filter
- code. 5.212.0010 HEPA filter



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- Silenced two stage motor. • Suction system with by-pass cooling. • S. S. tank.
- Professional closing hooks. • Static electric shock inhibitor. • Drain hose system.
- Shock proof trolley. • Liquid float valve. • Cloth filter. • 10 m power cable.
- Easy standing head (during filter cleaning). • Traceless wheels. • Accessories Ø 40.

	Zeus IF
code	8.215.0501
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	1 - 1200 (1400) W
column depression	21,6 kPa/2200 mmH ₂ O
air suction	53 l/s
total volume/dust/liquid	50 l./21 l./35 l.
dimension/weight	62x51x85 cm / 16,5 kg

Domus IF



Standard equipment:

- 5.209.0021 Hose 2,5 m



- 6.205.0126



- 3.754.0048



- 3.754.0049



- 3.754.0083



- 3.754.0084



- 3.754.0085



- 5.509.0039



- Power cable 10 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.509.1405 Cloth filter for fine dust
- code. 5.212.0093 Nylon filter
- code. 5.212.0021 Washable filter
- code. 5.212.0034 HEPA filter



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- 2 silenced two stage motor. • Suction system with by-pass cooling. • S. S. tank.
- Professional closing hooks. • Static electric shock inhibitor. • Drain hose system.
- Shock proof trolley. • Liquid float valve. • Cloth filter. • 10 m power cable.
- Easy standing head (during filter cleaning). • Traceless wheels. • Accessories Ø 40.

	Domus IF
code	8.216.0502
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	2 - 2000 (2400) W silenced two stage motor
column depression	22 kPa/2240 mmH ₂ O
air suction	108 l/s
total volume/dust/liquid	78 l./35 l./48 l.
dimension/weight	62x51x96 cm / 23 kg

Domus IR



Standard equipment:

- 5.209.0021 Hose 2,5 m 

- 6.205.0126 

- 3.754.0048 

- 3.754.0049 

- 3.754.0083  400 mm

- 3.754.0084 

- 3.754.0085 

- 5.509.0039 

- Power cable 10 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.509.1405 Cloth filter for fine dust
- code. 5.212.0093 Nylon filter
- code. 5.212.0021 Washable filter
- code. 5.212.0034 HEPA filter



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- 2 silenced two stage motor. • Suction system with by-pass cooling. • S. S. tank.
- Professional closing hooks. • Static electric shock inhibitor. • Tilting tank.
- Fully removable tank. • Shock proof trolley. • Liquid float valve. • Cloth filter.
- 10 m power cable. • Easy standing head (during filter cleaning). • Cable holder.
- Traceless wheels. • Accessories Ø 40.

Domus IR	
code	8.213.0501
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	2 - 2000 (2400) W silenced two stage motor
column depression	22 kPa/2240 mmH ₂ O
air suction	108 l/s
total volume/dust/liquid	78 l./35 l./48 l.
dimension/weight	62x51x99 cm / 26 kg

Taurus PR



Standard equipment:

- 5.209.0021 Hose 2,5 m



- 6.205.0126



- 3.754.0048



- 3.754.0049



- 3.754.0083



- 3.754.0084



- 3.754.0085



- 5.509.0039



- Power cable 10 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.509.1405 Cloth filter for fine dust
- code. 5.212.0093 Nylon filter
- code. 5.212.0021 Washable filter
- code. 5.212.0034 HEPA filter




Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- 3 silenced two stage motor. • Suction system with by-pass cooling. • Plastic tank (PP).
- Professional closing hooks. • Tilting tank. • Fully removable tank. • Static electric shock inhibitor. • Shock proof trolley. • Liquid float valve. • Cloth filter. • 10 m power cable.
- Easy standing head (during filter cleaning). • Cable holder. • Traceless wheels.
- Accessories Ø 40.

	Taurus PR
code	8.212.0508
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	3 - 3000 (3600) W silenced two stage motor
column depression	22 kPa/2240 mmH ₂ O
air suction	162 l/s
total volume/dust/liquid	78 l./35 l./48 l.
dimension/weight	62x51x99 cm / 25 kg

Taurus IR



Standard equipment:

- 5.209.0021 Hose 2,5 m 
- 6.205.0126 
- 3.754.0048 
- 3.754.0049 
- 3.754.0083  400 mm
- 3.754.0084 
- 3.754.0085 
- 5.509.0039 
- Power cable 10 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.509.1405 Cloth filter for fine dust
- code. 5.212.0093 Nylon filter
- code. 5.212.0021 Washable filter
- code. 5.212.0034 HEPA filter



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:


- 3 silenced two stage motor. • Suction system with by-pass cooling. • S. S. tank.
- Professional closing hooks. • Static electric shock inhibitor. • Tilting tank.
- Fully removable tank. • Shock proof trolley. • Liquid float valve. • Cloth filter.
- 10 m power cable. • Easy standing head (during filter cleaning). • Cable holder.
- Traceless wheels. • Accessories Ø 40.

	Taurus IR
code	8.212.0501
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	3 - 3000 (3600) W silenced two stage motor
column depression	22 kPa/2240 mmH ₂ O
air suction	162 l/s
total volume/dust/liquid	78 l./35 l./48 l.
dimension/weight	62x51x99 cm / 27 kg

Taurus IR 2 Way



• Hose connection for second operator

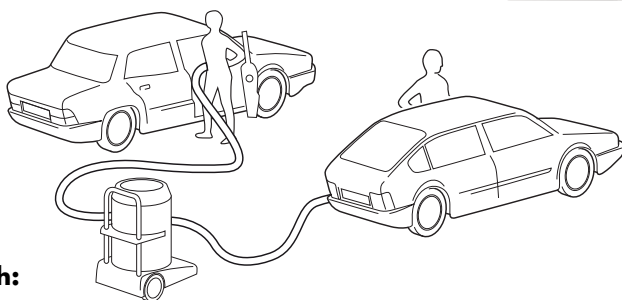

Equipped with:

- 3 silenced two stage motor.
- Suction system with by-pass cooling.
- S. S. tank.
- Professional closing hooks.
- Static electric shock inhibitor.
- Tilting tank.
- Fully removable tank.
- Shock proof trolley.
- Liquid float valve.
- Cloth filter.
- 10 m power cable.
- Easy standing head (during filter cleaning).
- Cable holder.
- Traceless wheels.
- Accessories Ø 40.

Standard equipment:

- 2 x 5.209.0082
Hose 5 m




- 2 x 3.754.0048



- 2 x 3.754.0049



- 5.509.0039



- Power cable 10 m

Optional:

- code 6.205.0126 - Ø 40 chromium plated steel curve and extension pipe kit
- code 6.205.0121 - Ø 40 complete accessories kit (holder accessories, floor brush, wet tool, carpet tool)
- code. 5.212.0093 Cloth filter for fine dust.



Watch the video on youtube:
www.youtube.com/lavorpro

Taurus IR 2 Way

code	8.212.0523
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	3 - 3000 (3600) W silenced two stage motor
column depression	22 kPa/2240 mmH ₂ O
air suction	162 l/s
total volume/dust/liquid	78 l./35 l./48 l.
dimension/weight	62x51x99 cm / 27 kg

Injection extraction range




Lavorwash professional extraction/injection machines: **GBP 20 Pro, Jupiter, Apollo, Solaris, Costellation** and the innovative **Windy Foam** are the real solution to clean any type of textiles! Machines equipped with 6,5 up to 78 liters tanks, 1 or 2 double stage motors, 1 or 2 detergent pumps to assure always the right flow of injected chemical.

Provided with a full range of accessories capable to suit each deep cleaning textile application: carpets, vehicle seats, sofas, tents, chairs, mats, etc... To be used in the **HO-RE-CA, Automotive** and **Industrial** cleaning, they will perfectly fit any requirements.

Windy IE Foam, a range of injection/extraction cleaning machines ideal for car cleaning, as they can be used with thick foam or liquid detergent.

Windy IE Foam is equipped with a connection for compressed air with pressure regulator and an external tank of 12 liters capacity, which allows detergent refilling without opening the machine.

Windy IE Foam Compressor is equipped with an air compressor unit and an external tank of 12 liters capacity, which allows detergent refilling without opening the machine.

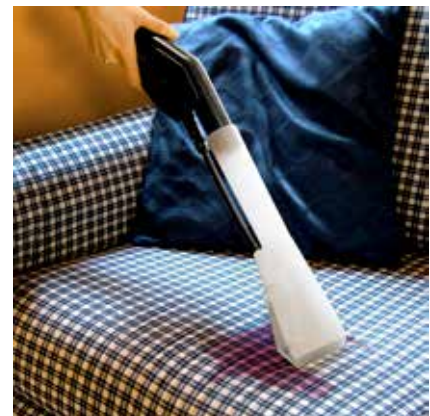

GBP 20 Pro

NEW



Standard equipment:

- 5.209.0183 +
- 5.511.0094



- 3.753.0009



- 5.209.0187



- 5.209.0193



- 3.754.0004



- 3.754.0015



- 3.754.0005



- 3.754.0189



- 3.754.0188



- 3.752.0038



- 3.752.0032



- 5.212.0020



- Power cable 7,5 m

Optional:

**Hygienic PERFUME
OPTIONAL**



Code 0.010.0035
100 ml x 4 pcs

Equipped with:

- Silenced single stage motor.
- Suction system with by-pass cooling.
- 20 litre plastic tank (PP)
- Shock proof trolley.
- Liquid float valve.
- 7,5 m power cable.
- Washable filter
- Paper collector filter
- Accessories Ø 35.

GBP 20 Pro	
code	8.204.0066
voltage	230V ~ 50Hz
n°motors - power (max)	1 - 1200 (1400) W
column depression	27 kPa/2700 mmH ₂ O
air suction	70 l/s
total volume	20 l.
dimension/weight	40x39x64 cm/9,5 kg

Jupiter

1
MOTOR



Standard equipment:

- 0.965.0003 Hose 2,5 m



- 2 x 0.965.0004



- 0.965.0001



- 0.965.0002



- Power cable 7,5 m

Equipped with:

- Spray-extraction cleaner with a separate anti-foaming tank.
- Designed for rug, carpet, and upholstery cleaning in offices, clinics, cinemas and households, as well as car upholstery.
- Thorough cleaning through the 4 bar spray pressure and 230 mbar suction power.
- Spray and extraction functions are separately operable.
- Separate fresh and wastewater tanks, each containing 6,5 l. Separate container for anti-foaming agent.
- Clear, ergonomic nozzles.
- Long stainless steel vacuum tube for convenient, effortless work.
- Rubber-coated castor wheels and large back wheels.



	Jupiter
code	0.065.0001
voltage	230V ~ 50Hz
n°motors - power (max)	1 - 1100 W
column depression	23 kPa/2300 mmH ₂ O
air suction	50 l/s
total volume/dust/liquid	6,5 l./5 l./6 l.
dimension/weight	55 x 35 x 63,5 cm/13 kg

Apollo IF



Standard equipment:

- 6.205.0129 Hose 2,5 m



- 6.205.0132




- 5.209.0143



- 6.205.0011



- 6.205.0008



- Power cable 10 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.212.0094 Nylon filter
- code. 5.212.0020 Washable filter
- code. 5.212.0006 Cartridge filter
- code. 5.212.0010 HEPA filter

Equipped with:

- Silenced two stage motor. • Suction system with by-pass cooling. • S. S. tank. Detergent pump (1x32W – 0,8 l/m – 3,5bar) • Professional closing hooks.
- Static electric shock inhibitor. • Drain hose system. • 11 l. detergent tank.
- Shock proof trolley. Liquid float valve. • Cloth filter. • 10 m power cable.
- Easy standing head (during filter cleaning). • Traceless wheels. • Accessories Ø 40.

Apollo IF	
code	8.220.0501
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	1 - 1200 (1400) W
column depression	21,6 kPa/2200 mmH ₂ O
air suction	53 l/s
total volume/dust/liquid	50 l./21 l./35 l.
dimension/weight	62x51x85 cm / 19 kg



Solaris IF



Standard equipment:


- 6.205.0129 Hose 2,5 m



- 6.205.0132



- 5.209.0143



- 5.509.0039



- Power cable 10 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.509.1405 Cloth filter for fine dust
- code. 5.212.0093 Nylon filter
- code. 5.212.0021 Washable filter
- code. 5.212.0034 HEPA filter

Equipped with:

- 2 silenced two stage motor. • Suction system with by-pass cooling. • S. S. tank.
- Detergent pump (2x48W – 0,7-1,2 l/m – 5 bar). • Professional closing hooks.
- Static electric shock inhibitor. • Drain hose system. • 25 l. detergent tank.
- Shock proof trolley. • Liquid float valve. • Cloth filter. • 10 m power cable.
- Easy standing head (during filter cleaning). • Traceless wheels. • Accessories Ø 40.

	Solaris IF
code	8.221.0508
voltage	230V ~ 50Hz
n°motors - power (max)	2 - 2200 (2400) W silenced two stage motor
column depression	22 kPa/2240 mmH ₂ O
air suction	108 l/s
total volume/dust/liquid	78 l./35 l./48 l.
dimension/weight	62x51x96 cm / 29,5 kg

Costellation IR



Standard equipment:

- 6.205.0129 Hose 2,5 m




- 6.205.0132



- 5.209.0143



- 5.509.0039



- Power cable 10 m

Optional:

- code. 5.212.0022 Paper collector filter set
- code. 5.512.0021 Washable filter
- code. 5.509.1405 Cloth filter for fine dust
- code. 5.212.0093 Nylon filter
- code. 5.212.0034 HEPA filter

Equipped with:

- 2 silenced two stage motor. • Suction system with by-pass cooling. • S. S. tank.
- Detergent pump (2x48W – 0,7-1,2 l/m – 5 bar). • Professional closing hooks.
- Static electric shock inhibitor. • Tilting tank. • Fully removable tank.
- 11 l. detergent tank. • Shock proof trolley. • Liquid float valve. • Cloth filter.
- 10 m power cable. • Easy standing head (during filter cleaning).
- Traceless wheels. • Accessories Ø 40.

	Costellation IR
code	8.221.0518
voltage	230V ~ 50Hz
n°motors - power (max)	2 - 2200 (2400) W silenced two stage motor
column depression	22 kPa/2240 mmH ₂ O
air suction	108 l/s
total volume/dust/liquid	78 l./35 l./48 l.
dimension/weight	62x51x99 cm / 29,5 kg



Windy IE Foam is an injection/extraction cleaning machine ideal for car cleaning, as it can be used with thick foam or liquid detergent. Windy IE Foam is equipped with a connection for compressed air with pressure regulator and an external tank of 12 liters capacity, which allows the detergent refilling without opening the machine.

Thanks to the special brush the foam can be spread quickly and easily on the car seats or mats and can be removed after few seconds with the transparent nozzle. Being equipped with two high depression vacuum motors, 90% of the foam is recovered with the great advantage of a very fast drying (20 min.) and a better cleaning performance.



Windy IE Foam is ideal for the pre-washing of the car body, rims and engine. Using the lance with the 7 (2 x 3,5) meters hose can be produced a thick foam that will stay on the dirty components, giving more effectiveness to the detergent. Windy IE Foam is also an excellent two motors wet & dry vacuum cleaner with 65 liters tank capacity.

Fields of applications

Washing of: car body and interiors, carpets, sofas, restrooms, kitchens and wherever is necessary to wash and sanitize.

Users:

Car dealers, car washers, garages, car body shops, contractor cleaners and any other user which is provided with a source of compressed air; in the absence of a compressed air system, Windy IE Foam can also be used in combination with a small 24 liters compressor.






Windy IE Foam Compressor

NEW



Standard equipment:

- 5.209.0021 Hose 2,5 m 
- 6.205.0197 
- 5.209.0205 
- 6.402.0108 
- 6.402.0109 
- 2 x 5.211.0102 
- 5.212.0141 
- 3.754.0048 
- 3.697.0072 LC prefoam

Optional:

- 5.212.0022 - Paper collector filter set - 10 pcs
- 5.209.0177 - Cloth filter for fine dust
- 5.212.0093 - Nylon filter
- 0.110.0020 - Antifoam device
- 3.697.0036 - Anti-foaming for recovery tank
- 3.697.0058 - (4x5 Kg) Acid-based det. for toilets
- 3.697.0057 - (4x5 Kg) Alkaline-based det. alimentary environments
- 3.697.0056 - (4x5 Kg) Det. for fabrics and carpeting



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- 2 high efficiency by-pass motors • Suction system with by-pass cooling • Stainless steel tank • Detergent pump (48W – 1 l/m – 7 bar) • Steel closing hooks • Static electric shock inhibitor • Fully removable tank • 12 l. detergent tank • Shock proof trolley • Safety floating • Washable cartridge filter • 7,5 m power cable • Traceless wheels • Accessories Ø 40 • Equipped with compressor unit for autonomous foam production (200 W - 8 bar max).

Windy IE Foam Compressor	
code	8.239.0018
voltage	220-240V ~ 50-60Hz
n°motors - power (max)	2 - 2000 (2400) W high efficiency motor
column depression	22 kPa/2200 mmH ₂ O
air suction	130 l/s
total volume/dust/liquid	65 l./30 l./40 l.
dimension/weight	44x46x96 cm / 16 kg



Windy IE Foam Compressor is an injection/extraction cleaning machine ideal for car cleaning, as it can be used with thick foam. Windy IE Foam is equipped with an air compressor unit and an external tank of 12 liters capacity, which allows the detergent refilling without opening the machine.

Thanks to the special brush the foam can be spread quickly and easily on the car seats or mats and can be removed after few seconds with the transparent nozzle. Being equipped with two high depression vacuum motors, 90% of the foam is recovered with the great advantage of a very fast drying (20 min.) and a better cleaning performance.



Windy IE Foam Compressor is ideal for the pre-washing of the car body, rims and engine. Using the lance with the 7 (2 x 3,5) meters hose can be produced a thick foam that will stay on the dirty components, giving more effectiveness to the detergent. Windy IE Foam Compressor is also an excellent two motors wet & dry vacuum cleaner with 65 liters tank capacity.


Fields of applications

Washing of: car body and interiors, carpets, sofas, restrooms, kitchens and wherever is necessary to wash and sanitize.

Users:

Car dealers, car washers, garages, car body shops, contractor cleaners.






Flexible hose Ø 35

Code	Description	m	Ø
3.753.0063	Roll of flexible hose without swivel	30	35

Code	Description	Ø
3.752.0118	Sleeve tank side	35
3.752.0028	Swivel straight accessories side	35
3.753.0077	Swivel curved accessories side	35



Flexible hose Ø 40

Code	Description	m	Ø
3.753.0038	Roll of flexible hose without swivel	30	40

Code	Description	Ø
3.754.0047	Sleeve tank side	40
3.754.0046	Swivel straight accessories side	40



Complete flexible hose Ø 40



Code	Description	m	Ø
5.209.0127	Flexible hose with swivel	4	40
5.209.0082	Flexible hose with swivel	5	40
6.205.0130	Flexible hose with swivel for Injection extraction	5	40
6.205.0131	Flexible hose with swivel for Injection extraction	10	40



PVC spacer

Code 0.110.0021



Ø 40 Spacer for plastic bag 58 l. (for Domus/Taurus/Solaris/Costellation/Windy 278/378 models)

This accessory is necessary when using collector bag: the use of collector bag is not possible without PVC spacer.

The use of the collector bag grants easy filter cleaning and its quick replacement whenever necessary, saving time also during the operation of tank cleaning.



Ø 40 Gangway tool (only for Domus IR/Taurus PR/ Taurus IR/Costellation IR/Windy 278 IF/Windy 378 IR models)

A set made of special accessory with front and back squeegee + a flex connection hose in order to vacuum easily and quickly water and liquid from the floor.

0.911.0210 front squeegee strip with hole

0.911.0211 rear squeegee strip without hole

Gangway tool (only for liquid suction)

Code 0.110.0062



Turbo brush Ø 35

Code 3.754.0081



Ø 35 270 mm Turbo brush (for Whisper, Silent models)

This special brush grants top results, because it has an additional small rotary brush creating a sweeping effect that helps effective suction.



Antifoam device

Code 0.110.0020

This device avoids the forming of foam that may affect the operation of the float.

Why wider filtering area is not making automatically a better machine?

In the industrial sector, productivity, resistance and breakeven expectations are growing. The ideal vacuum would be then a machine filtering any kind of dust (also the thinnest) being able to work continuously without the need to clean the filter and without any maintenance. It is more important to get close effectively to this target rather than the way we can reach this. This is the reason why is useless having a big filtering area if the filter is still clogging up fast and more often I need to stop working to clean it. In our machines we developed the best prevention of the problem (avoiding dust is reaching quickly the filter) rather than trying a solution afterwards (since the filter is clogging up quickly, extending the filtering area it is supposed to extend the effectiveness). It doesn't matter how wide is the filter, but for how long can work the machine without the need to clean the filter...

And with this issue, we are the best.

When either more airflow or more depression is necessary?

The airflow helps the dirt transport through long pipes. Longer is the hose, better is bigger airflow; still with light dust it is better having lower depression: the inlet air speed will be lower, the harder the dirt is getting in touch with the filter.

When residuals have high specific weight, depression is more important than airflow to win gravity force of dirt attached to the surface.



1

MOTOR



2

MOTORS



3

MOTORS

Number of motors:

It explains how many motors there are in the vacuum cleaner.

Ignition is independent in order to increase progressively the performances. The working system (whenever it is more than one) is in parallel, so the air suction increases and the depression is steady whenever the motors are progressively switched on.



CLOTH FILTER

Cloth filter The cloth consistency and its shape allow a simple cleaning phase and the re-usage of the filter. It can be used only for vacuuming dry waste; if combined with nylon filter it is possible to work for a longer period of time.



Pneumatic filter shaker (international copyright)

Through the selector, the airflow is inverted to feed an internal pneumatic hammer that shakes and blows the filter, cleaning it again completely. It is not necessary to touch the filter or worst to clean it outside the machine spreading again dust everywhere.

ELECTROSTATIC



Antistatic machines and accessories

Using specific conductive materials and engineering, there's the prevention of ignition sparks from the machine side, up to the end of any tool available for this machine range.

Nomenclature

S = Universal (motor)
D = Induction (motor)

M = Single phase (motor)
T = Tri-Phase (motor)
V = Varnishing (tank)
X = S. S. (tank)

Liters (tank) x 100 = 2400 W
SMX 77 2-24 S
n° Motor

Filter shaker



SMX77 2-24
SMX77 3-36



DMX80 1-30 S
DTX 80 1-30 S

Code	Model	Page	Voltage	Abs. Power	Column depression	Suction air	Tank capacity	Noise level	Filtering surface	Packaging	Packaging weight	Packaging weight	Pieces for pallet
			V-Hz (Ph)	W	kPa	l/s	l	dB(A)	cm ²	cm L x l x H	kg	lbs	n°
0.056.0002	SMX77 2-24	108	230 V-50-60 Hz (1Ph)	2000	24 kPa	108 l/s	77 l.	74 dB(A)	4300 cm ²	70x91x141	66	145,5	1
0.056.0004	SMX77 3-36	108	230 V-50-60 Hz (1Ph)	3000	24 kPa	162 l/s	77 l.	76 dB(A)	4300 cm ²	70x91x141	67	147,7	1
0.045.0031	DMX 80 1-22 S	109	230 V-50 Hz (1Ph)	2200	32 kPa	97 l/s	80 l.	<74 dB(A)	4300 cm ²	50x50x140	80	176	1
0.045.0032	DTX 80 1-30 S	109	400 V-50 Hz (3Ph)	3000	32 kPa	97 l/s	80 l.	<74 dB(A)	4300 cm ²	50x50x140	85	187	1

SMX 77



Models: 2-24



Models: 3-36



Standard equipment:

- Reduction Ø 70 - Ø 40 mm



- Cloth filter



Optional:

- Heat resistant over filter code 0.156.0003



- Oven kit Ø 40 code 0.156.0005



Equipped with:

- 3 silenced two stage motor (SMX 3-36 model). • 2 silenced two stage motor (SMX 2-24 model).
- Suction system with by-pass cooling. • S. S. tank. • Manual filter shaker.
- Professional closing hooks. • Static electric shock inhibitor. • Liquid float valve. • Cloth filter.
- Filters (optional) against thin dust or Hepa. • Though integrated accessory storage facility.
- Non-overturning steel structure. • Available with body and cover entirely made of S. S. AISI 304. • Traceless wheels. • Accessories Ø 50.

	SMX77 2-24	SMX77 3-36
code	0.056.0002	0.056.0004
abs. power W	2000	3000
n° / type motor	2x two stages universal	3x two stages universal
column depression	23,6 kPa (2400 mmH2O)	23,6 kPa (2400 mmH2O)
suction air	108 l/s	162 l/s
tank volume/dust capacity/liquid capacity	77 l / 45 l / 50 l	77 l / 45 l / 50 l
noise level	74 dB(A)	76 dB(A)
voltage	230 V~50-60 Hz (1Ph)	230 V~50-60 Hz (1Ph)
filtering surface	4300 cm ²	4300 cm ²
filtering capacity	5 µm	5 µm
cable length	7,5 m	7,5 m
dimensions / weight	70x91x141cm/66Kg-145.2 lbs	70x91x141cm/67Kg-147.4 lbs

**DMX80
DTX80**



Standard equipment:

- Flexible hose ø 40 - 3 m
code 5.209.0159



- Flat lance ø 40
code 3.754.0048



- Cloth filter
code 5.509.0039



Optional:

- Washable filter
5.212.0021



- Kit 6.205.0115

- Steel curve + pipe
Ø 40



- Round brush Ø 40



- Accessories holder Ø 40



- Floor Brush



- Wet tool



- Carpet tool



Equipped with:

- IP 65 silenced turbine motor. • Liquid float valve. Washable filter. • S. S. tank. • Manual filter shaker. • Professional closing hooks. • Static electric shock inhibitor. • Non-overturning steel structure. • Drain hose system. • Epoxy varnishing. • Steering wheels with brake. • Air intake safety valves for turbine motor protection.

	DMX80 1-22 S	DTX80 1-30 S
code	0.045.0031	0.045.0032
abs. power W	2200	3000
n° / type motor	1x induction	1x induction
column depression	32 kPa (3200 mmH2O)	32 kPa (3200 mmH2O)
suction air	97 l/s	97 l/s
tank volume/dust capacity/liquid capacity	80/36/49 lt	80/36/49 lt
noise level	74 dB(A)	74 dB(A)
voltage	230 V~50 Hz (1Ph)	400 V~50 Hz (3Ph)
filtering surface	4300 cm ²	4300 cm ²
filtering capacity	5 µm	5 µm
cable length	10 m	10 m
dimensions / weight	50x50x140cm/80Kg -176 lbs	50x50x140cm/85Kg -187 lbs



Which are key components in a single disc machine?

The procedure to choose the right product for specific application must take into consideration of: the weight (that is the pressure over the brush), the surface to work, the RPM / type of construction of the motor and the transmission type.

Generally speaking, the lower is the rotation speed, the most effective is the pressure over the brush and deeper is dirt removal.

With the increasing of rotation speed, lower is the effect of the pressure over the floor.

Different accessories combinations, rotation speed and motor power can provide the solution for any application: from dewaxing or deep scrub, up to polishing or buffing; from the crystallization up to spray cleaning; also carpet cleaning or sanding. Please see application chapter on the next pages.

How much power is necessary?

There is not a set rule, if not the common sense: higher is the friction over the floor (a combination of type of working, type of surface and type of accessory used), the higher will be the power request to the motor. So more powerful is the motor, the harder the job being able to be done.

The power is nothing without control....

Together with its construction simplicity there are the worst danger for the operator who has to control the machine for long working sessions.

Only the perfect components and weights distribution on the machine allows a perfect balanced and ergonomic working posture, without any vibration and any strange effort to keep it in place.


A cheap construction (less strength) not considering the perfect ergonomic for the user, further to the waste of money (less productivity), it's a serious danger for the health!





• Transmission: helical gear system:

Up to 400 RPM the reduction and transmission system is made with Transmission helical gear system. Grants continuous power, long life and noiselessness of the machine.



• Constant brush pressure:


The pressure of brushes on the floor is made by the heavy brush plate that follows irregularity on the floor and gives always the top pressure without any adjustment still with shorter bristles.



• Brush speed:

Means Rotation Per Minute of the brush.

Nomenclature

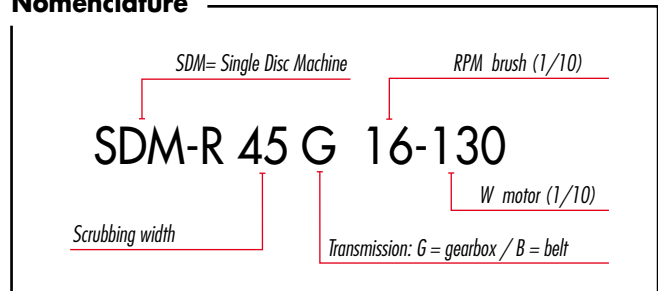


Application

	Page	Code	Ø brush	Stripping synthetic floor (PVC)	Stripping cork present floor (linoleum)	Wet scrubbing/basic cleaning of stones, tiles and lino (sensitive floors)	Wet scrubbing/basic cleaning of synthetic or non sensitive floors pvc	Crystallizing	Carpet shampooing	Sanding wood	Sanding cement	Spray polishing and buffing
SDM-R 45 G 16-130	113	0.055.0302	430 - 17"	•	•	•	•	•	•	•		
SDM-R 45 G 16-160	113	0.055.0303	430 - 17"	•	•	•	•	•	•		•	
SDM-R 45 G 16-180	113	0.055.0304	430 - 17"	•	•	•	•	•	•			
SDM-R 45 G 40-160	113	0.055.0307	430 - 17"									•



Code	Model	Absorbed power	Scrubbing width	Brush speed	Brush contact pressure	Handle packaging dimensions	Handle packaging weight	Handle packaging weight	Body packaging dimensions	Body packaging weight	Body packaging weight	Pieces for pallet
		W	mm-inch	RPM	g/cm ²	L x l x H cm	Kg	lbs	L x l x H cm	Kg	lbs	n°
0.055.0302	SDM-R 45G 16-130	1300	430 - 17"	165	40,8	38x14x114	6,80	14,99	56x46x31	41,00	90,38	16
0.055.0303	SDM-R 45G 16-160	1600	430 - 17"	165	41,3	38x14x114	6,80	14,99	56x46x31	42,00	92,59	16
0.055.0304	SDM-R 45G 16-180	1800	430 - 17"	165	44,3	38x14x114	6,80	14,99	56x46x31	48,00	105,82	12
0.055.0307	SDM-R 45G 40-160	1600	430 - 17"	400	34,9	38x14x114	6,80	14,99	56x46x31	46,50	102,51	16

SDM-R 45 G

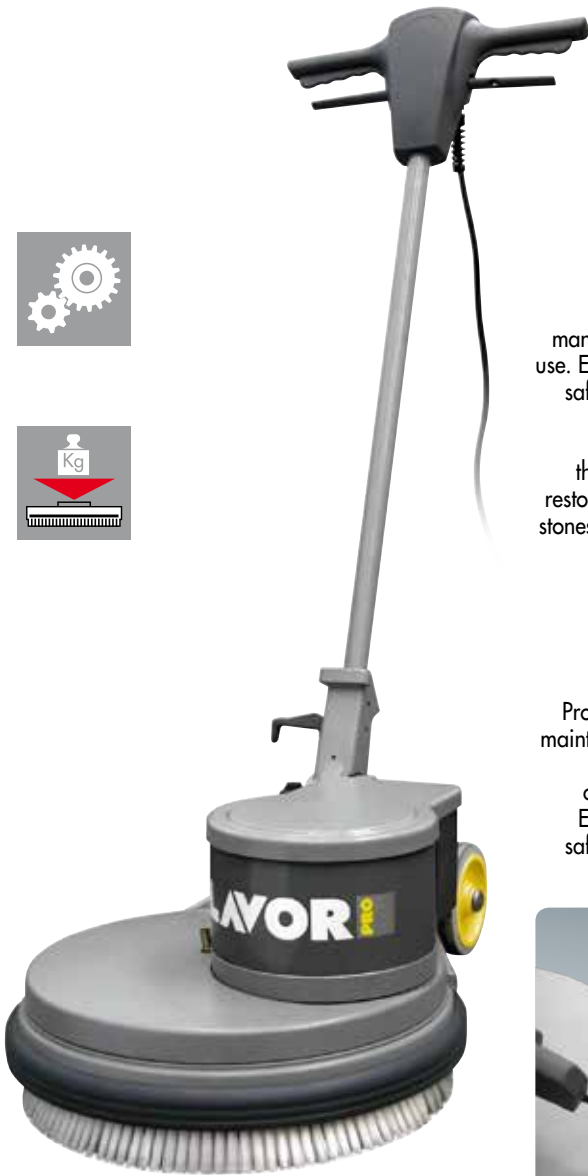

Scrubbers

• **SDM-R 45 G:**

Complete range of single disc machines professional, sturdy, manageable, practical and simple to use. Ergonomic handle with integrated safety controls. Strong handle joint.

Powerful and noiseless motor

- Adapted in order to satisfy all the cleaning requirements, marble restoration and treatment and natural stones, woods and parquet, moquette, dewaxing, hard scrubbing.

Polishers

• **SDM-R 45G 40-160:**

Professional single disc machine for maintenance cleaning or for polishing whichever type of natural floor or treating with metalized waxes. Ergonomic handle with integrated safety controls. Strong handle joint. Powerful and noiseless motor



165 

400 

Model
SDM -R 45G 40-160

Optional:

- Code 0.955.0001K
11 l detergent tank (only for low speed models)



Accessories and brushes are not included. For available accessories refer to accessories pages.

	SDM-R 45G 16-130	SDM-R 45G 16-160	SDM-R 45G 16-180	SDM-R 45G 40-160
code	0.055.0302	0.055.0303	0.055.0304	0.055.0307
type	low speed	low speed	low speed	medium speed
brush speed	165 RPM	165 RPM	165 RPM	400 RPM
scrubbing width	430 mm	430 mm	430 mm	430 mm
voltage	230V / 50HZ	230V / 50HZ	230V / 50HZ	230V / 50HZ
abs. power	1300 W	1600 W	1800 W	1600 W
transmission	helical gear system			
brush contact pressure	40,8 g/cm ²	41,3 g/cm ²	44,3 g/cm ²	34,9 g/cm ²
noise level	60 dB(A)	60 dB(A)	60 dB(A)	60 dB(A)
cable length	12 m	12 m	12 m	12 m
body height	280 mm	280 mm	280 mm	280 mm
dimensions / weight	54,2x42,5x120 cm/35 Kg	54,2x42,5x120 cm/41 Kg	54,2x42,5x120 cm/52 Kg	62,5x50,5x120 cm/45 Kg



Accessories

Description	Code	Models	Stripping synthetic floor (PVC)	Stripping cork present floor (linoleum)	Wet scrubbing/basic cleaning of stones, tiles and lino (sensitive floors)	Wet scrubbing/basic cleaning of synthetic or non sensitive floors pvc	Crystallizing	Carpet shampooing	Sanding wood	Sanding cement	Spray cleaning	Spray polishing and buffing
Brushes (*)												
 Carpet brush	0.955.0014	SDM-R 45G						x				
 Scrubbing brush PP 0,6 mm	0.955.0007	SDM-R 45G		x	x							
 Tynex brush	0.955.0004	SDM-R 45G	x			x						
Pad Holder												
 EWU pad holder	0.955.0016	SDM-R 45G	x	x	x	x	x			x	x	
 EWU pad holder	0.955.0017	SDM-R 45G 40-160									x	x
 Abrasive Disc Holder	0.955.0022	SDM-R 45G							x	x		
Special Disc												
 Carborandum disc	0.955.0027	SDM-R 45G								x		
Pads												
 Pad micro fiber 5 pcs	6.508.0116	SDM-R 45G						x				
 Pad beige 5 pcs	6.508.0032	SDM-R 45 G 40-160										x
 Pad red 5 pcs	6.508.0118	SDM-R 45G			x						x	
 Pad green 5 pcs	6.508.0039	SDM-R 45G		x		x						
 Pad black 5 pcs	6.508.0046	SDM-R 45G	x									
 Pad silver Inox 5 pcs	6.508.0121	SDM-R 45G					x					
 Emery paper GR24 disc	0.955.0023	SDM-R 45G							x			
 Emery paper GR60 disc	0.955.0024	SDM-R 45G							x			
 Vidia disc GR24	0.955.0026	SDM-R 45G								x		
 Vidia disc GR36	0.955.0025	SDM-R 45G								x		

X = suitable

(*): Brushes code 0.955.0014, 0.955.0007 and 0.955.0004 must not be used with medium speed model SDM-R 45G 40-160 (code 0.055.0307)

Accessories

				Stripping synthetic floor (PVC).	Stripping cork present floor (linoleum).	Wet-scrubbing/basic cleaning of stones, tiles and lino (sensitive floors)	Wet-scrubbing/basic cleaning of synthetic or non-sensitive floors (PVC)	Crystallizing	Carpet shampooing	Sanding wood	Sanding cement	Spray polishing and buffing
11 l chemical tank 	0.955.0001K	SDM-R 45G 16-130		○	○	○	○		○			
		SDM-R 45G 16-160		○	○	○	○		○			
		SDM-R 45G 16-180		○	○	○	○		○			
Detergent 	LCN-800F	3.697.0023	4 X 5 litres	•	•	•	•					
	LCN-800	3.697.0024	4 X 5 litres	•	•	•	•					
	LCB-740F	3.697.0031	4 X 5 litres			•						
	LCB-900WR	3.697.0030	4 X 5 litres	•								
	LCN-600SVF	3.697.0033	4 X 5 litres	•		•	•					
	LCN-700	3.697.0035	4 X 5 litres						•			
	LCN-680AL	3.697.0025	4 X 5 litres			•						•
	LCN-650	3.697.0026	4 X 5 litres				•					
	LCN-640WM	3.697.0027	4 X 5 litres									•

S = standard equipment ○ = optional • = available

Applications pads



MICROFIBER PAD - Ideal for "gres & porcelain" and carpet/moquette if used with dried foam shampoo.



BEIGE PAD - POLISHING - Polyester. To polish all kinds of floor. Use dry.




RED PAD - SPRAY BUFFING - Polyester. For frequent use on relatively clean floors, to dry clean, polish and remove scu marks.



GREEN PAD - INTERMEDIATE CLEANING ACTION - Nylon. To remove all the old superficial wax, rests, obtaining ready floors to be recoated. Use wet.



BLACK PAD - WET STRIPPING - Nylon. For wet stripping of heavy layers of wax. Ideal to remove old floor finish scu and cement marks.

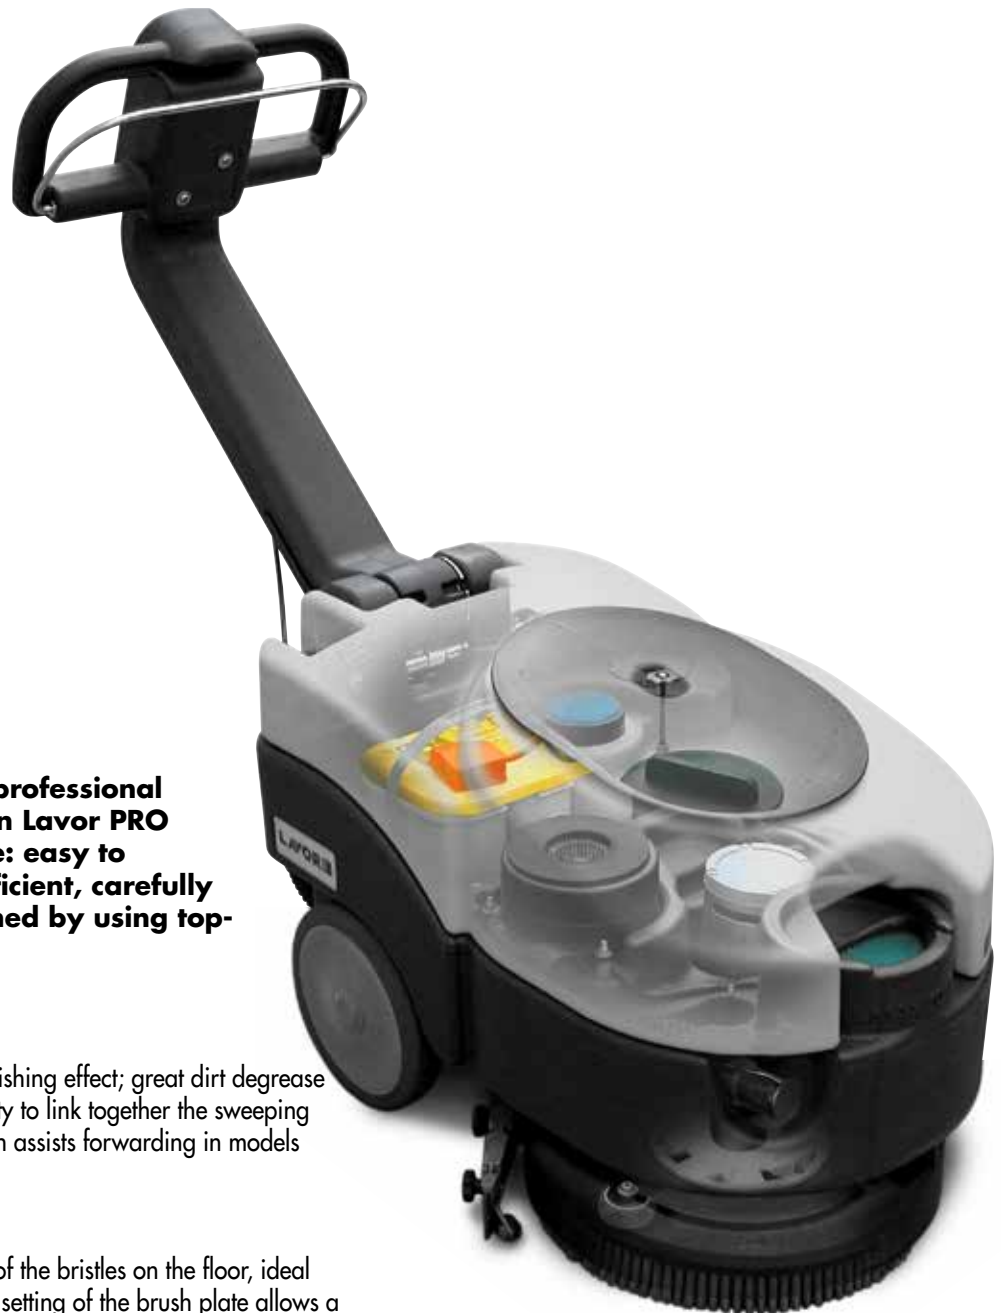

Direct experience of professional people has resulted in LAVOR PRO floor scrubbers range: easy to handle, powerful, efficient, carefully conceived and designed by using top-quality materials.

Why cilindric brush?

High speed rotation for a polishing effect; great dirt decrease in floors with grout ; possibility to link together the sweeping function; the rotation direction assists forwarding in models without traction.

Why disc brush?

Extended mechanical action of the bristles on the floor, ideal for persistent dirt: the special setting of the brush plate allows a balanced gripping effect, assisting easy use in the non traction models. Complete cleaning also next to walls is possible and the compact washing element lower at the sides is studied to scrub also under edges.

How a squeegee should be designed?

The shape and the material used grant a perfect drying in every condition, also on floors with grout or when quick U turns are necessary.

The floating body can stay in the machine operating space (compact / room saving)

The manual adjusting system grants a perfect drying on each kind of floors.


How long do battery charges last?

It is impossible to determine exactly how long a battery charge lasts and so how long a machine can work in autonomy.

Battery autonomy changes depending on type of surface, dirt quantity, brush type and way in which traction system is used (speed and slope).


Battery life is made up of number of charge cycles (also incomplete), if usage conditions, charging and service are perfectly observed.

Manufacturing technology diversifies numbers of cycles, service needed, usage/charging conditions and performances.



• Number of disc brushes:
The scrubbing group meets different cleaning

path need with 1, 2 or 3 disc brushes.




• Number of cilindric brushes: Scrubbing group offer 1 or 2 roller brush solutions together with the sweeping capability.

Bristles of different material allows perfect cleaning in any conditions, (carpet and parquet included).




• Cilindric brush quick connection and release: The fittings and releasing of brushes is toolless. Ordinary cleaning maintenace are simple and quick for anybody.



• Constant brush pressure:
The pressure of brushes on the floor is made by the heavy brush plate that follows irregularity on the floor and gives

always the top pressure without any adjustment still with shorter bristles.



STOP

• Solenoid valve:
Together with the reliable mechanical solution faucet, this system reduce chemical consumption and avoid solution waste. The flow is open only when brush is working, there is no accidental leak with machine stopped. The system is protected by a filter with easy maintenance.



CHARGER

• Integrated battery charger
Some models are equipped with integrated battery charger, other ones have the predisposition only. It is possible to charge batteries in different rooms, without coming back to the same place.



• Integrated battery
Standard integrated battery is built with a maintenance free technology and it does not require restrictions about the place for battery charging. The non stop research allow to use always up-to-date batteries that combined with appropriate battery charger grant machine top performances.



• Hour meter
Useful to check work sessions and to plan stops for battery charging. Best output and investment protection.

LEVEL



• Charge meter and battery protection

It informs when the autonomy is finishing , allowing the end of the cleaning task (stopping brushes first and then the rest). It prevents damages to the batteries, preventing the complete discharge with any kind of technologies.




• Eco Energy System


no-stop and separate control of water quantity and chemical product concentration with automatic and delayed stop of the supply when the machine stops (Automatic Detergent Measuring System).

• U-turns in closed area

The space (length X width) needed to make a U-turn is the min. width in which it is possible to work with the machine. The smaller this room is, the higher the machine output, because less maneuvering is needed. The technical features of our floor scrubber driers (the front wheel shaft is close to the rear one in the walk behind models and the tight steering radius of ride-on ones) grant the minimum room for U-turns. On each ride-on models there is an automatic device that lowers speed when turning, raising the safety level also for inexperienced users.

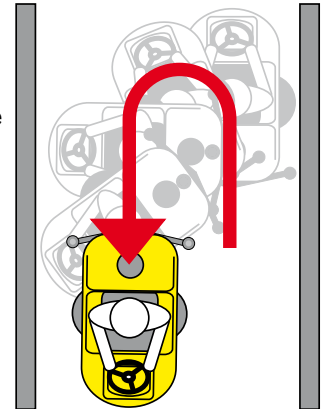

Applications pads



BEIGE PAD - POLISHING - Polyester To polish all kinds of floor. Use dry.



GREEN PAD - INTERMEDIATE CLEANING ACTION - Nylon To remove all the old superficial wax, rests, obtaining ready floors to be recoated. Use wet.



BLACK PAD - WET STRIPPING - Nylon For wet stripping of heavy layers of wax. Ideal to remove old floor finish scu and cement marks.

Nomenclature

Model

Next EVO 66 BTA

Scrubbing width

E = ELECTRIC

B = BATTERY

BT = BATTERY with TRACTION

A = Automatic brush plate lifting for walk behind



Sprinter

Crystal Clean

Quick

Speed

Dynamic

Free Evo

Next Evo

Easy-R

Code	Model	Page	Power supply	Brushes	Scrubbing width	Squeegee width	Max working capacity	Solution tank capacity	Recovery tank capacity	Packaging	Weight	Weight	pcs x pallet
			V	n°	mm	mm	m ² /h - ft ² /h	l/gal	l/gal	L x l x H cm / inc	kg	lbs	n°
8.501.0501	Sprinter	120	230V/50HZ	1	290	320	1015-10925	2,8/0,74	5,6/1,48	116x40x36/46x16x14	17	37	10
8.501.0508	Crystal Clean	122	230V/50HZ	1	290	320	1015-10925	2,8/0,74	5,6/1,48	100x40x42/39x16x17	19	42	15
8.518.0004	Quick 36E	124	230V/50HZ	1	360	460	1260-13562	11/2,91	12/3,17	81x56x80/32x22x32	62	135	1
8.518.0003	Quick 36B	124	12V	1	360	460	1260-13562	11/2,91	12/3,17	81x56x80/32x22x32	70	154	1
8.524.3302	Speed 45E Eco	126	230V/50HZ	1	450	800	1575-16952	25/6,61	28/7,39	113x61x110/44x24x43	123	271	1
8.524.0002	Speed 45B	126	24V	1	450	800	1575-16952	25/6,61	28/7,39	113x61x110/44x24x43	73	161	1
8.524.1002	Speed 45B	126	24V	1	450	800	1575-16952	25/6,61	28/7,39	113x61x110/44x24x43	114	251	1
8.580.0001	Dynamic 45E	128	230V/50HZ	1	450	540	1500-16145	30/7,9	35/9,24	117x58x78/46x22x30	-	-	1
8.580.0002	Dynamic 45B	128	24V	1	450	540	1500-16145	30/7,9	35/9,24	117x58x78/46x22x30	77	169	1
8.580.0003	Dynamic 45B	128	24V	1	450	540	1500-16145	30/7,9	35/9,24	117x58x78/46x22x30	117	257	1
8.527.0003	Free EVO 50E	130	230V/50HZ	1	500	800	2000-21527	44/11,63	50/13,21	125x57x116/49,5x22,5x46	117	256	1
8.527.0004	Free EVO 50B	130	24V	1	500	800	2000-21527	44/11,63	50/13,21	125x57x116/49,5x22,5x46	83	183	1



Floor scrubber driers



Midi-R

Comfort XXS

Comfort XS-R

Comfort S-R

Comfort M

Comfort L

Code	Model	Page	Power supply	Brushes	Scrubbing width	Squeegee width	Max working capacity	Solution tank capacity	Recovery tank capacity	Packaging	Weight	Weight	pcs x pallet
			V	n°	mm	mm	m ² /h - ft ² /h	l/gal	l/gal	L x l x H cm / inc	kg	lbs	n°
8.527.0001	Free EVO 50B	130	24V	1	500	800	2000-21527	44/11,63	50/13,21	125x57x116/49,5x22,5x46	85	187	1
8.527.0010	Free EVO 50B	130	24V	1	500	800	2000-21527	44/11,63	50/13,21	125x57x116/49,5x22,5x46	138	304	1
8.527.0011	Free EVO 50BT	130	24V	1	500	800	2000-21527	44/11,63	50/13,21	125x57x116/49,5x22,5x46	85	187	1
8.527.0002	Free EVO 50BT	130	24V	1	500	800	2000-21527	44/11,63	50/13,21	125x57x116/49,5x22,5x46	87	191	1
8.527.0012	Free EVO 50BT	130	24V	1	500	800	2000-21527	44/11,63	50/13,21	125x57x116/49,5x22,5x46	140	308	1
8.525.1301	Next EVO 55BT	132	24V	1	550	800	2200-24210	55/14,52	65/17,17	142x72x123/56x28x48	120	264	1
8.525.1302	Next EVO 66BTA	132	24V	2	660	800	2640-28416	55/14,52	65/17,17	142x72x123/56x28x48	133	193	1
8.516.0406	Easy-R 50BT	134	24V	1	500	800	2250-24218	67/17,70	77/20,35	142x72x123/56x28x48	128	282	1
8.516.0407	Easy-R 55BT	134	24V	2	550	800	2475-26640	67/17,70	77/20,35	142x72x123/56x28x48	131	289	1
8.516.0415	Easy-R 66BT	134	24V	2	660	800	2970-31968	67/17,70	77/20,35	142x72x123/56x28x48	140	308	1
8.517.0105	Midi-R 75BT	136	24V	2	750	900	4275-46015	88/23,25	91/24,04	156x74x128/61x29x50	178	392	1
8.579.0001	Comfort XXS 66	138	24V	2	660	855	3250-34982	75/19,81	80/21,13	140x82x135/56x33x53	175	390	1
8.579.0002	Comfort XXS 66	138	24V	2	660	855	3250-34982	75/19,81	80/21,13	140x82x135/56x33x53	251	560	1
8.579.0011	Comfort XXS 66	138	24V	2	660	855	3250-34982	75/19,81	80/21,13	140x82x135/56x33x53	177	394	1
8.574.4001	Comfort XS-R 75 Essential	140	24V	2	750	900	3750-40364	110/29,06	130/34,34	152x97x154/59x39x61	226	497	1
8.574.4003	Comfort XS-R 85 Essential	140	24V	2	750	900	3750-40364	110/29,06	130/34,34	152x97x154/59x39x61	226	497	1
8.574.4101	Comfort XS-R 75 UP	142	24V	2	750	900	3750-40364	110/29,06	130/34,34	152x97x154/59x39x61	236	519	1
8.574.4103	Comfort XS-R 85 UP	142	24V	2	820	1000	6200-66000	110/29,06	130/34,34	152x97x154/59x39x61	237	521	1
8.575.0010	Comfort S-R 90	144	24V	2	900	1000	5740-61784	140/36,99	150/39,63	200x118x171/79x46x67	320	760	1
8.578.0004	Comfort M102	146	36V	2	1020	1250	7140-76854	200/52,84	210/55,48	200x118x171/79x46x67	381	838	1
8.572.0002	Comfort L122	148	36V	3	1220	1450	8540-91923	280/73,97	315/83,22	230x135x190/91x53x74	670	1.474	1

Sprinter



- Suitable to work in high congested areas like small shops, offices, kitchens, schools, hospitals, bars, gyms, restaurants
- Three controls for brush drive, washing and drying operations
- Double floor squeegee for both forward and reverse drying
- Sound pressure 68 dB (A)
- Min. working height required 200 mm
- Structure built with durable materials
- Suitable load on the brush for an optimal cleaning efficiency
- Detachable detergent/recovery tank
- Cable holder
- 7mt electric cable
- Non-marking wheels.

Standard equipment:



- 6.505.0002
PP brush Ø 100 mm



- 6.505.0001
Squeegee kit



- 5.509.0007
Stationary plate




- 0.010.0034
4 x 100 ml concentrated detergent



Watch the video on youtube:
www.youtube.com/lavorpro

	Sprinter
code	8.501.0501
power supply	230 V - 50 Hz
scrubbing / squeegee width	290 / 320 mm
max working capacity	1015 m ² /h
solution tank capacity	2.8 l / 0.74 gal
recovery tank capacity	5.6 l / 1.48 gal
traction	mechanical
RPM / pressure on the brushes	1000 / 7 kg / 15,43 lbs
brush motor power	200 W
noise level dB (A)	68
depression / vacuum motor	1428 mmH ₂ O / 800 W
dimensions / weight	37 x 37 x 113 cm / 13 kg

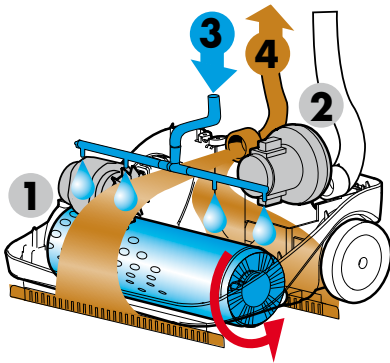

- 1) Brush motor
- 2) Vacuum motor
- 3) Detergent solution flow
- 4) Dirty liquid flow

Double squeegee for both forward and reverse washing and drying.
 PP brush suitable for most common floors (brush for carpet and moquette cleaning available).
 ABS shock-proof covers. Non-marking rubber wheels.




Optional accessories:



- 6.505.0009
Carpet cleaning kit




- 4.512.0068
Extension electric cord 15 m with Schuko plug

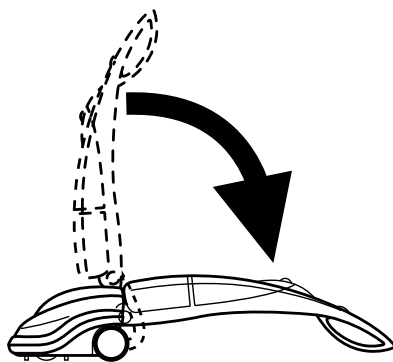

Minimum working height 200 mm, allowing perfect cleaning under furnitures, chairs, tables, beds, etc.
 The tilting handle makes easy and stressless the daily use of the machine.
 Large tank capacity avoiding frequent refilling of the unit

Cylindrical brush quick connection and release: the fitting and releasing of the brush does not require the use of tools. Ordinary cleaning and maintenance are simple and quick for anybody



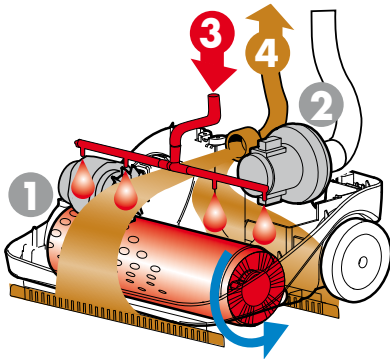

- 1) Brush motor
- 2) Vacuum motor
- 3) Hot water with detergent solution flow
- 4) Dirty liquid flow



Optional accessories:




- 6.505.0009
Carpet cleaning kit



- 4.512.0068
Extension electric cord 15 m with Schuko plug

Double squeegee for both forward and reverse washing and drying.

PP brush suitable for most common floors and soft brush for carpet and moquette cleaning. Hot water cleaning for a faster and perfect removal of the most common organic dirt (grease, mud, oil, etc.)

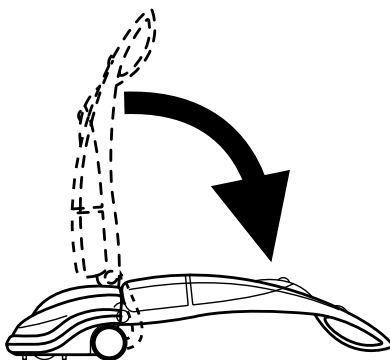

Minimum working height 200 mm, allowing perfect cleaning under furnitures, chairs, tables, beds, etc.

The tilting handle makes easy and stressless the daily use of the machine.

Large tank capacity avoiding frequent refilling of the unit

Cylindrical brush quick connection and release: the fitting and releasing of the brush does not require the use of tools. Ordinary cleaning and maintenance are simple and quick for anybody





Quick

Standard equipment:



- 5.511.1346
PP brush Ø 360 mm - 14"



- 4.508.1040
Front squeegee blade
L.537 mm - Th. 2.5 mm
- 4.508.1041
Rear squeegee blade
L.590 mm - Th. 3 mm



- 0.108.0072
On-board Battery charger
12V 8A
only for model code:
8.518.0003



- 0.107.0061
Maintenance free battery
12V MFP 50
65Ah C20/50Ah C-5
only for model code:
8.518.0003

- 0.108.0025
Power cable 1,5 mt.
for battery charger
only for model code:
8.518.0003



- Suitable to work in high congested areas like small shops, offices, kitchens, schools, hospitals, bars, gyms, restaurants
- Adjustable flow (automatic start-stop with solenoid valve) of the detergent solution depending on type of surface
- Brush with quick release
- Removable recovery tank
- Available in battery version (36B) with integrated battery charger with data memory and for any type of batteries
- Battery included
- Squeegee lifting lever
- Compact reclining handle with control switches
- Easy access and simple service of the components.



Watch the video on youtube:
www.youtube.com/lavorpro

	Quick 36E	Quick 36B
code	8.518.0004	8.518.0003
power supply	220/240 V - 50/60 Hz	12 V
scrubbing / squeegee width	360 / 460 mm	360 / 460 mm
max working capacity	1260 m ² /h	1260 m ² /h
solution tank capacity	11 l / 2.91 gal	11 l / 2.91 gal
recovery tank capacity	12-13 l / 3.2 gal	12-13 l / 3.2 gal
traction	mechanical	mechanical
RPM / pressure on the brushes	130/18 kg / 40 lbs	130/18 kg / 40 lbs
brush motor power	370 W	250 W
detergent solution system	solenoid valve	solenoid valve
depression / vacuum motor	850 mmH ₂ O/400 W	650 mmH ₂ O/180 W
dimensions / weight	120x43x97 cm / 53kg	120x43x97 cm / 61kg



The unit can be supplied mains (15 m optional extension cable available) or battery powered. Reclining handle: fit on any operator's height and allowing the perfect cleaning also on 90° corners. Shock-absorbing covers, simple cleaning of the recovery tank, non marking wheels.

Easy access to mechanical parts (easy maintenance of each component), removable recovery tank without tools.



Optional accessories:



- 0.107.0050 Battery AGM 12V 55Ah



- 0.108.0051 Booster battery charger



- 4.508.1058 Polyurethane front blade L.537 TH. 2,5
- 4.508.1059 Polyurethane rear blade L.590 TH. 3



- 5.511.1413 Tynex brush Ø 360 mm-14"
- 5.511.1411 PP 0,03 brush Ø 360 mm-14"
- 5.511.1412 PES brush Ø 360 mm-14"



- 5.511.1129 EWU pad driver Ø 360mm-14"



- 6.508.0143 Abrasive pad Ø 381 mm-15" - beige (5 pcs.)
- 6.508.0144 Abrasive pad Ø 381 mm-15" - green (5 pcs.)
- 6.508.0141 Abrasive pad Ø 381 mm-15" - black (5 pcs.)



User friendly analogic control panel. Control lever for brush operation and detergent water outflow. General ON/OFF switch, brush and vacuum motor switch, solenoid valve operation switch.

Parabolic squeegee, easy rubber blades replacement. The floating brush plate and squeegee grant the right cleaning pressure on any type of floor.



- 4.512.0068 Extension electric cord 15 m with Schuko plug



Speed

Standard equipment:



- 5.511.1688
PP brush Ø 430 mm - 17"



- 4.508.X468
Front squeegee blade L.830 mm Shore 40 Th. 2.5 mm
- 4.508.X467
Rear squeegee blade L.870 mm Shore 40 Th. 3 mm



- 0.108.0042
On-board Battery charger 24V 10A
- only for model code:
8.524.1002
8.524.0002



- 2 x 0.107.0061
Maintenance free battery 12 MFP 50 - 12V 50Ah
- only for model code:
8.524.0002



- Suitable to work in high congested areas like wellness centres and medical environments in general, gyms, retail outlets, car shops, sales points and health care
- Solution water filter and solenoid valve (battery model only)
- User friendly control panel
- Hour meter (optional)
- Recovery water tank with visual inspection
- Reclining handle with control lever (battery model only)
- Low noise operation thanks to the protected positioning of vacuum motor
- Recovery tank drain hose with adjustable flow system
- Indicator of the solution water tank fill level
- Easy access to the recovery tank
- Non-marking wheels.



Watch the video on youtube:
www.youtube.com/lavorpro

	Speed 45E	Speed 45B	Speed 45B
code	8.524.3302	8.524.1002	8.524.0002
power supply	230 V - 50 Hz	24V (battery charger included)	24V (batteries and charger included)
scrubbing / squeegee width	430 / 800 mm	430 / 800 mm	430 / 800 mm
max working capacity	1575 m ² /h	1575 m ² /h	1575 m ² /h
solution tank capacity	25 l / 6.61 gal	25 l / 6.61 gal	25 l / 6.61 gal
recovery tank capacity	25-28 l / 6.61 gal	25-28 l / 6.61 gal	25-28 l / 6.61 gal
traction	mechanical	mechanical	mechanical
RPM / pressure on the brushes	140/25 kg / 39,68 lbs	150/18 kg / 39,68 lbs	150/18 kg / 39,68 lbs
brush motor power	550 W	450 W	450 W
detergent solution system	mechanical	solenoid valve	solenoid valve
depression / vacuum motor	1100 mmH ₂ O/400 W	1100 mmH ₂ O/370 W	1100 mmH ₂ O/370 W
dimensions / weight	106x50x88 cm / 127 kg	106x50x88 cm / 76kg	106x50x88 cm / 117kg



User friendly analogic control panel. Control lever for brush operation and detergent water outflow. ON/OFF and battery cutout key switch, brush and vacuum motor switch, detergent dosing knob (optional), Thermal circuit breaker to protect vacuum and brush motor, battery level indicator, hour meter (optional).

Optional accessories:



- 0.107.0050 Battery AGM 12V 55Ah



- 4.508.1178 Polyurethane front blade L.830 TH. 3
- 4.508.1177 Polyurethane rear blade L.870 TH. 4



- 5.511.1713 Tynex brush Ø 430 mm-17"
- 5.511.1711 PP 0,03 brush Ø 430 mm-17"
- 5.511.1712 PES brush Ø 430 mm - 17"



- 5.511.1095 EWU pad driver Ø 430 mm-17"



- 6.508.0032 Abrasive pad Ø 430 mm-17" - beige (5 pcs.)
- 6.508.0039 Abrasive pad Ø 430 mm-17" - green (5 pcs.)
- 6.508.0046 Abrasive pad Ø 430 mm-17" - black (5 pcs.)



- 4.512.0068 Extension electric cord 15 m with Schuko plug

Indicator of clean water tank level. Detergent solution regulation. Recovery tank drain hose with adjustable flow system.



Easy access to recovery water tank with visual inspection. Extremely silent (62 dB) thanks to the particular housing of the vacuum motor and the use of soundproofing material.

Thanks to the special squeegee support it is easily possible the tilting of the machine to carry out the drying of the floor without scrubbing. The oversize wheels facilitate maneuverability and effortless use.





Dynamic

NEW

Standard equipment:



- 5.511.1941
PP brush Ø 430 mm - 17"



- 4.508.1319 Front squeegee blade Shore 40 Th.
- 4.508.1320 Rear squeegee blade Shore 40 Th.



- 0.108.0073
On-board Battery charger 24V 10A
(only for model code: 8.580.0002 / 8.580.0003)



- 2 x 0.107.0061
Maintenance free battery 12 MFP 50 - 12V 50Ah
only for model code: 8.580.0003



- Ideal for small and medium floors up to 1600sqm, especially when congested by people or furnishing like in wellness centres, gyms, car showroom, retail shops, hospitals and schools.
- Automatic brush attachment, discharge and delayed cut-off.
- Adjustable solution release with automatic cut-off.
- Narrow body with both side brush protrusion and 300° squeegee spin.
- Tool less removable recovery tank with large visual inspection window and stretchable discharge hose.
- Adjustable driving handle with dead man switches, soft touch controls and diagnosis (Eco Energy mode and battery low level automatic cut-off for DC version).
- Large non marking working wheels and sturdy rear roller for displacements.



Watch the video on youtube:
www.youtube.com/lavorpro

	Dynamic 45E	Dynamic 45B	Dynamic 45B
code	8.580.0001	8.580.0002	8.580.0003
power supply	230V 50Hz	24V (battery charger included)	24V (batteries and charger included)
scrubbing / squeegee width	450 / 540 mm	450 / 540 mm	450 / 540 mm
max working capacity	1600 m ² /h	1600 m ² /h	1600 m ² /h
solution tank capacity	30 l / 7.92 gal	30 l / 7.92 gal	30 l / 7.92 gal
recovery tank capacity	32-35 l / 8.45 - 9.24 gal	32-35 l / 8.45 - 9.24 gal	32-35 l / 8.45 - 9.24 gal
traction	mechanical	mechanical	mechanical
RPM / pressure on the brushes	150/18 kg / 39,68 lbs	150/18 kg / 39,68 lbs	150/18 kg / 39,68 lbs
brush motor power	400 W	400 W	400 W
detergent solution system	solenoid valve	solenoid valve	solenoid valve
depression / vacuum motor	1200 mmH ₂ O/400 W	1200 mmH ₂ O/400 W	1200 mmH ₂ O/400 W
dimensions / weight	117x58x78 cm / kg	117x58x78 cm / 57 kg	117x58x78 cm / 97 kg



On/off switch protecting unintentional use.
 Protection against overloads, battery discharge abuse (DC only) and undesired run.
 Convenient one switch maintenance over the brush.
 Eco Energy setting for extensive working time and extremely quiet operations (DC only).

Optional accessories:



- 0.107.0050 Battery AGM 12V 55Ah



- 4.508.1324 Polyurethane front blade TH. 3
- 4.508.1325 Polyurethane rear blade TH. 4



- 5.511.1942 Tynex brush Ø 430 mm-17"
- 5.511.1943 PP 0,03 brush Ø 430 mm-17"
- 5.511.1944 PES brush Ø 430 mm - 17"



- 5.511.0229 EWU pad driver Ø 430 mm-17"



- 6.508.0032 Abrasive pad Ø 430 mm-17" - beige (5 pcs.)
- 6.508.0039 Abrasive pad Ø 430 mm-17" - green (5 pcs.)
- 6.508.0046 Abrasive pad Ø 430 mm-17" - black (5 pcs.)



- 4.512.0068 Extension electric cord 15 m with Schuko plug

Accessible on-board charger (DC only, when provided), far away from sprays.
 Time saving convenient foot operating squeegee lift.
 Handle can be easily adjusted to fit comfort of operators even in narrow spaces.



Easy access and handling to clean recovery tank and floater.
 Less downtimes due to simple maintenance and construction
 Great visibility and cleaning capability on hard to reach edges on both sides of the brush.



Extensive squeegee spin for easy blade replacement and perfect suction even on corners
 Easy setting and automatic solution release to save chemical and fit different floor conditions.
 High stability and capability to overtake small steps.



Free Evo



- Very compact scrubbing machines suitable to work for the maintenance cleaning of limited-size areas (up to 1.500 m²)
- Especially suitable for cleaning: car shops, sales points, gym, health care
- Control panel with operator presence safety system
- Low level battery indicator: brush/vacuum and traction progressive cut off
- Solution water filter and solenoid valve (battery model only)
- Easy access to the battery compartment
- Quick drain and easily inspectable recovery tank
- Non-marking wheels
- Roto-molded polyethylene tanks, shock and acid resistant
- The lower tank also serves as battery compartment
- Low noise operation thanks to the protected positioning of vacuum motor.

Standard equipment:



- 5.511.1097
PP brush Ø 483 mm - 19"



- 4.508.X468
Front squeegee blade L.830 mm Shore 40 Th. 2.5 mm
- 4.508.X467
Rear squeegee blade L.870 mm Shore 40 Th. 3 mm



- 0.108.0042
On-board Battery charger 24V 10A
only for model code:
8.527.0001 - 8.527.0002
8.527.0010 - 8.527.0012



- 0.107.0054
Maintenance free battery 12V 75Ah BT DC 5.5
only for model code:
8.527.0010 - 8.527.0012

Other available versions:

- 8.527.0010 - Free Evo 50B with batteries and battery charger
- 8.527.0012 - Free Evo 50BT with batteries and battery charger



Watch the video on youtube:
www.youtube.com/lavorpro

	Free Evo 50E	Free Evo 50B	Free Evo 50B	Free Evo 50BT	Free Evo 50BT
code	8.527.0003	8.527.0004	8.527.0001	8.527.0011	8.527.0002
power supply	230 V - 50 Hz	24V	24V (battery charger included)	24V	24V (battery charger included)
scrubbing / squeegee width	500 / 800 mm	500 / 800 mm	500 / 800 mm	500 / 800 mm	500 / 800 mm
max working capacity	2000 m ² /h	2000 m ² /h	2000 m ² /h	2000 m ² /h	2000 m ² /h
solution tank capacity	44 l / 11,63 gal	44 l / 11,63 gal	44 l / 11,63 gal	44 l / 11,63 gal	44 l / 11,63 gal
recovery tank capacity	50-60 l / 13,21-16 gal	50-60 l / 13,21-16 gal	50-60 l / 13,21-16 gal	50-60 l / 13,21-16 gal	50-60 l / 13,21-16 gal
traction/traction motor	mechanical	mechanical	mechanical	automatic/150W	automatic/150W
RPM / pressure on the brushes	150/20 kg / 44,09 lbs	150/18 kg / 44,09 lbs	150/18 kg / 44,09 lbs	150/18 kg / 39,68 lbs	150/18 kg / 44,09 lbs
brush motor power	550W	550W	550W	550W	550W
detergent solution system	solenoid valve	solenoid valve	solenoid valve	solenoid valve	solenoid valve
depression / vacuum motor	1700 mmH ₂ O/1000W	1280mmH ₂ O/400W	1280 mmH ₂ O/400W	1280 mmH ₂ O/400W	1280 mmH ₂ O/400W
dimensions / weight	116x46x98cm / 115 kg	116x51x98cm / 114 kg	116x51x98cm / 116 kg	116x51x98cm / 118 kg	116x51x98cm / 120 kg



Powerful gearmotor; metal brush plate with integrated plastic splash guard/bumper.

Optional accessories:



- 2 x 0.107.0002
Tubular battery Pb-acid
12V 118Ah C5



- 2 x 0.107.0063
GEL Battery 12 MFP 105
12V 105Ah C5



- 4.508.1178 Polyurethane
front blade L.830 TH. 3
- 4.508.1177 Polyurethane
rear blade L.870 TH. 4



- 5.511.1098
Tynex brush Ø 483 mm-19"
- 5.511.1128
PP 0,03 brush Ø 483 mm-19"
- 5.511.1206
PES brush Ø 483 mm - 19"



- 5.511.1099
EWU pad driver Ø 483
mm-19"



- 6.508.0034
Abrasive pad Ø 483 mm-19"
- beige (5 pcs.)
- 6.508.0041
Abrasive pad Ø 483 mm-19"
- green (5 pcs.)
- 6.508.0048
Abrasive pad Ø 483 mm-19"
- black (5 pcs.)

The outflow of the detergent solution is controlled by a solenoid valve. The actuation of the solenoid valve is operated by the control lever, avoiding the detergent solution outflow when the brush is stopped during the interruptions of work.



Renovated squeegee with new pressure adjusting system. The squeegee blades are easily replaceable without the use of tools. Quick and easy squeegee coupling through the two large knobs; the squeegee is released without any damage in the event of accidental impact.

Easy and intuitive controls. The outflow of the cleaning solution is easily controlled using the mechanical lever placed on the control panel. Inspectable mesh filter to trap any existing solid body in the cleaning solution.



- 4.512.0068
Extension electric cord 15 m
with Schuko plug



User friendly analogic control panel. Control lever for brush operation and detergent water outflow. ON/OFF and battery cutout key switch, brush and vacuum motor switch, detergent regulation device. Thermal circuit breaker to protect vacuum motor and brush motor, battery charge level indicator. Hour meter, clean water tank

Optional accessories:



- 2 x 0.107.0002 Tubular battery Pb-acid 12V 118Ah C5



- 2 x 0.107.0063 GEL Battery 12 MFP 105 12V 105Ah C5



- 0.108.0001 Battery Charger 24V 12A 220-240/50-60



- 4.508.1178 Polyurethane front blade L.830 TH. 3
- 4.508.1177 Polyurethane rear blade L.870 TH. 4
- 4.508.1526 Polyurethane front blade L.860 TH. 4
- 4.508.1525 Polyurethane rear blade L.900 TH. 4

level indicator. Detergent regulation device. Recovery tank drain hose with adjustable flow system. Automatic brush lifting (only model 66BTA).



Automatic detergent dosing system. Fully accessible recovery water tank with visual inspection. Easy access to the recovery tank. Easy access and simple service of the components without use of tools.



- 5.511.1114 Tynex brush Ø 533 mm-21"
- 5.511.1106 Tynex brush Ø 330 mm-13" 2x
- 5.511.1794 PP brush Ø 533 mm-21"
- 5.511.1255 PP 0,03 brush Ø 330 mm-13" 2x

- 5.511.1207 PES brush Ø 533 mm-21"
- 5.511.1202 PES brush Ø 330 mm-13" 2x



- 5.511.1115 EWU pad driver Ø 533mm-21"
- 2x 5.511.1107 EWU pad driver Ø 330mm-13"



(5 pcs package)

- 6.508.0035 - Ø 533 mm-21"- beige
- 6.508.0042 - Ø 533 mm-21"- green
- 6.508.0049 - Ø 533 mm-21"- black
- 6.508.0030 - Ø 340 mm-13"- beige
- 6.508.0037 - Ø 340 mm-13"- green
- 6.508.0044 - Ø 340 mm-13"- black

Battery trolley for a quick and easy battery change. Big size wheels for better maneuverability and effortless use.



Easy-R



Standard equipment:

Easy-R 50BT

- 5.511.1097
PP brush Ø 483 mm - 19"



Easy-R 55BT

- 2 x 5.511.1101
PP brush Ø 275 mm - 10"



Easy-R 66BT

- 2 x 5.511.1105
PP brush Ø 330 mm - 13"



- 4.508.X468
Front squeegee blade L.830 mm
Shore 40 Th. 2.5 mm
- 4.508.X467
Rear squeegee blade L.870 mm
Shore 40 Th. 3 mm



- Suitable to work for the maintenance and deep cleaning of large areas (up to 2.200 m²)
- User friendly control panel: forward speed setting, scrubbing and vacuuming selectors, battery charge indicator, traction direction indicator, key main switch
- Large handle with traction driving lever for forward and backward directions
- Self levelling brush plate
- Cover removable without tools provided with self locking system
- Quick vacuum motor and filter inspection, without tools
- Detergent solution tank with large opening protected by quick locking cap
- Parking brake directly on the wheel
- Non-marking wheels
- Easy squeegee regulation without tools
- Movable shock-proof squeegee
- Hour meter and solenoid valve.



Watch the video on youtube:
www.youtube.com/lavorpro

	Easy-R 50BT	Easy-R 55BT	Easy-R 66BT
code	8.516.0406	8.516.0407	8.516.0415
power supply	24V	24V	24V
scrubbing / squeegee width	500 / 800 mm	550 / 800 mm	660 / 800 mm
max working capacity	2250 m ² /h	2475 m ² /h	2970 m ² /h
solution tank capacity	67 l / 17.70 gal	67 l / 17.70 gal	67 l / 17.70 gal
recovery tank capacity	75-95 l / 20.35-25 gal	75-95 l / 20.35-25 gal	75-95 l / 20.35-25 gal
traction/traction motor	automatic/200W	automatic/200W	automatic/200W
RPM / pressure on the brushes	150/35 kg / 77.16 lbs	150/45 kg / 99.20 lbs	150/24 kg / 52.91 lbs
brush motor power	600 W	600 W	600 W
detergent solution system	solenoid valve	solenoid valve	solenoid valve
depression / vacuum motor	1280 mmH ₂ O / 450W	1280 mmH ₂ O / 450W	1280 mmH ₂ O / 450W
dimensions / weight	135x56x102 cm / 97 kg	128x71x106 cm / 100 kg	128x71x106 cm / 109 kg



User friendly control panel. Speed adjustment selectors. General ON/OFF and key switch, brush and vacuum motor switch. Thermal circuit breaker to protect vacuum motor and brush motor, battery level control, hour meter.

Optional accessories:



- 2 x 0.107.0002
Tubular battery Pb-acid
12V 118Ah C5



- 2 x 0.107.0063
GEL Battery 12 MFP 105
12V 105Ah C5



- 0.108.0001
Battery Charger 24V 12A
220-240/50-60



- 5.511.1494
On-board Battery charger
kit - 24V - 12A



- 4.508.1178 Polyurethane
front blade L.830 TH. 3
- 4.508.1177 Polyurethane
rear blade L.870 TH. 4



- 5.511.1098 Tynex brush Ø
483 mm-19"
- 2x 5.511.1102
Tynex brush Ø 275 mm-10"
- 2x 5.511.1106
Tynex brush Ø 330 mm-13"



- 5.511.1128
PP 0,03 brush Ø 483 mm-19"
- 2x 5.511.1254
PP 0,03 brush Ø 275 mm-10"
- 2x 5.511.1255
PP 0,03 brush Ø 330 mm-13"



- 5.511.1206
PES brush Ø 483 mm - 19"
- 2x 5.511.1201
PES brush Ø 275 mm-10"
- 2x 5.511.1202
PES brush Ø 330 mm-13"



- 5.511.1099
EWU pad driver Ø 483mm-19"
- 2x 5.511.1103
EWU pad driver Ø 275mm-10"
- 2x 5.511.1107
EWU pad driver Ø 330mm-13"



(5 pcs package)

- 6.508.0034 - Ø 483 mm-19"- beige
- 6.508.0041 - Ø 483 mm-19"- green
- 6.508.0048 - Ø 483 mm-19"- black
- 6.508.0095 - Ø 280 mm-11"- beige
- 6.508.0096 - Ø 280 mm-11"- green
- 6.508.0097 - Ø 280 mm-11"- black
- 6.508.0030 - Ø 340 mm-13"- beige
- 6.508.0037 - Ø 340 mm-13"- green
- 6.508.0044 - Ø 340 mm-13"- black

Easy access to battery and vacuum motor compartment, without using tools. Large tank capacity, at the top in the category (67 l). 2 x 12V -118 Ah C5 batteries to grant long work autonomy, up to 3 hours.



Control lever for brush operation and detergent water outflow. Recovery tank drain hose. Quick fitting battery charger plug.



Heavy duty 15 mm steel monobloc brush plate. Great pressure on the floor for a deep cleaning even on the toughest dirt. Self levelling system. Solenoid valve to stop the detergent water outflow during the work interruptions.



Midi-R



Standard equipment:

Midi-R 75BT



- 2 x 5.511.1168
PP brush Ø 360 mm - 14"



- 4.508.0646
Front squeegee blade L.925 mm
Shore 40 Th. 3 mm
- 4.508.0605
Rear squeegee blade L.1015 mm
Shore 30 Th. 4 mm



- Capable to work for the maintenance and deep cleaning of large areas (up to 2.600 m²)
- User friendly control panel: forward speed setting, scrubbing and vacuuming selectors, battery charge indicator, traction direction indicator, key main switch
- Large handle with traction driving lever for forward and backward directions
- Self levelling brush plate
- Cover removable without tools
- Quick vacuum motor and filter inspection, without tools
- Detergent solution filter
- Detergent solution tank provided with large opening protected by quick locking cap.

	Midi-R 75BT
code	8.517.0105
power supply	24V
scrubbing / squeegee width	750 / 900 mm
max working capacity	4275 m ² /h
solution tank capacity	88 l / 23.25 gal
recovery tank capacity	91-95 l / 24.04-25 gal
traction type / power	automatic / 300 W
RPM - pressure on the brushes	150 - 48,5 kg / 107.48 lbs
brush motor power	1000 W
detergent solution system	solenoid valve
depression / vacuum motor	1733 mmH ₂ O / 550 W
dimensions / weight	133x73x117 cm / 153 kg



Easy access to battery and vacuum motor compartment, without using tools. Large capacity shock and acid proof polyethylene tanks (88 l) avoid frequent refilling and idle time. 4 x 6V -180 Ah C5 batteries granting continuous working time up to 4-5 hours.

Adjustable speed ensures high precision in cleaning congested areas with obstacles. Intuitive controls reduce operator's training time. Safety thermal breakers prevent motor problems in case of overheating or operator's misuse.



Heavy duty V-shaped squeegee ensures perfect drying of every type of floor, even with large joints. Non-marking wheels avoid marks after the drying. Completely adjustable to fit any surface.

Strong mechanical control levers for heavy duty use. Large size drain hose for a fast emptying and a better cleaning of the recovery tank. Quick fitting battery charger plug.



Optional accessories:



- 4 x 0.107.0004 Tubular battery Pb-acid 6V 180Ah C20 + 2 x 5.511.0561 connection cable batteries



- 4 x 0.107.0072 Gel battery 6 MFP 180 6V 180Ah C5 + 2 x 5.511.0561 connection cable batteries



- 0.108.0002 Battery Charger 24V 25A 220-240/50-60



- 5.511.1495 On-board Battery charger kit - 24V - 25A



- 4.508.0901 Polyurethane front blade L.925 TH.3 Sh.40
- 4.508.0900 Polyurethane rear blade L.1015 TH.4 Sh.40



- 2x 5.511.1246 Tynex brush Ø 360 mm-14"



- 2x 5.511.1169 PP 0,03 brush Ø 360 mm-14"



- 2x 5.511.1203 PES brush Ø 360 mm - 14"



- 2x 5.511.1129 EWU pad driver Ø 360 mm-14"



(5 pcs package)

- 6.508.0143 - Ø 380 mm-15" - beige
- 6.508.0144 - Ø 380 mm-15" - green
- 6.508.0141 - Ø 380 mm-15" - black

Comfort XXS



Only codes
8.579.0002
8.579.0011



Only code
8.579.0002

Standard equipment:



• 2 x 5.511.1789
PP Brush Ø 330 mm - 13"



• 4.508.1619
Front squeegee blade
L.960 mm Th. 2,5 mm

• 4.508.1618
Rear squeegee blade
L.1000 mm Th. 3 mm



• 0.108.0054
On-board Battery charger
24V 20A
(only for models code:
8.579.0002 - 8.579.0011)



• 2 x 0.107.0063
Gel battery 12V 105 A/C
5/120A C20
(only for model code:
8.579.0002)



Watch the video on youtube:
www.youtube.com/lavorpro

Designed for the maintenance and deep cleaning of large areas (up to 3200 m².) with a very important reduction of cleaning cost. Very compact size and great maneuverability like walk behind models: suited for maintenance cleaning. • 32 kg. of constant pressure on the brushes. • Double counter rotating brush (66 cm of scrubbing width) obtaining better stability and constant pressure. • Great working autonomy thanks to the possibility to use 4 batteries 6 V 240 Ah and to rear wheel-drive. • Large load tank capacity (real load of 85 l.), resulting in reduced numbers of stops and maximum use of battery for effective operation of the machine. • Ergonomic steering wheel of new design with user friendly controls and digital display. • Easy access to electrical components. • Inspection cover for fast and easy cleaning and sanification of dirt water tank. • Automatic device that stops brushes and detergent water outflow when the machine is stationary. • Self-levelling brush plate. • **Automatic detergent dosing system.**

	Comfort XXS 66 BT	Comfort XXS 66 BT	Comfort XXS 66 BT
code	8.579.0001	8.579.0011	8.579.0002
power supply	24V	24V (battery charger included)	24V (batteries and battery charger included)
scrubbing / squeegee width	660 / 855 mm	660 / 855 mm	660 / 855 mm
max working capacity	3250 m ² /h	3250 m ² /h	3250 m ² /h
solution tank capacity	80 l / 19.81 gal	80 l / 19.81 gal	80 l / 19.81 gal
recovery tank capacity	80-85 l / 19.81-21.13 gal	80-85 l / 19.81-21.13 gal	80-85 l / 19.81-21.13 gal
traction	rear wheel-drive / 400 W	rear wheel-drive / 400 W	rear wheel-drive / 400 W
RPM / pressure on the brushes	170/32 kg / 70.54 lbs	170/32 kg / 70.54 lbs	170/32 kg / 70.54 lbs
brush motor power	2 X 400 W	2 X 400 W	2 X 400 W
max gradient empty/full tank	13% / 10%	13% / 10%	13% / 10%
depression / vacuum motor	1300 mmH ₂ O/400 W	1300 mmH ₂ O/400 W	1300 mmH ₂ O/400 W
dimensions / weight	123 x 63 h 121 cm / 160 kg	123 x 63 h 121 cm / 162 kg	123 x 63 h 121 cm / 234 kg



Great working autonomy thanks to the possibility to use 4 batteries 6 V 180 Ah granting continuous working up. Possibility to use also 2 batteries 12V. Less battery consumption thanks to rear wheel-drive. Large load tanks made of shock and acid proof polyethylene (real load of 85 l.), avoiding frequent stop for refilling.

Optional accessories:



- 4 x 0.107.0004
Tubular battery Pb-acid
6V 180Ah C20 + 2 x
5.511.0561 connection cable
batteries



- 4 x 0.107.0072
Gel battery 6 MFP 180
6V 180Ah C5 + 2 x
5.511.0561 connection cable
batteries



- 2 x 0.107.0002
Tubular battery Pb-acid
12V 118 Ah C5



- 0.108.0002
Battery charger 24V 25A
220-240/50-60



- 4.508.1594 Polyurethane
front blade L.960 TH.3 Sh.40
- 4.508.1596 Polyurethane
rear blade L.1000 TH.4
Sh.40



- 2 x 5.511.1106
Tynex brush Ø 330 mm-13"
- 2 x 5.511.1255
PP 0,03 brush Ø 330 mm-13"
- 2 x 5.511.1202
PES brush Ø 330 mm - 13"



- 2 x 5.511.1107
EWU pad driver
Ø 330 mm-13"



- 6.508.0030 - Ø 340 mm -
13"- beige (5 pcs.)
- 6.508.0037 - Ø 340 mm -
13"- green (5 pcs.)
- 6.508.0044 - Ø 340 mm -
13"- black (5 pcs.)

- 6.505.0062
Flashing light



User friendly control panel. Steering wheel with digital controls and display. Squeegee and brush plate mechanical and user friendly lifting lever: min. maintenance cost training time for the users. Scrubbing unit with double brush with brush plate made of steel for a great pressure (32 Kg.) on the floor resulting in an easy and deep cleaning of any kind of dirt.



Rear wheel-drive on 2 wheels allows the machine to get over remarkable slopes. Detergent solution is cleansed by an external completely accessible filter, that holds any impurities, thus protecting the solenoid valve. The easy access to all internal components of XXS make it possible to reduce maintenance cost. Detergent tank 2lt.

The comfortable and ergonomic seat allows the operator to work effortless for a long time, improving productivity. Its very compact size make it perfect to work in small areas where walk behind models are usually used. The use of XXS makes working easier and quicker with a huge saving of time.



Comfort XS-R Essential



- Capable to work for the maintenance and deep cleaning of large areas (up to 3.700 m²) with a very important reduction of cost of cleaning
- More than 50 kg of constant pressure on the brushes
- Large load tank capacity, resulting in reduced number of stops and maximum use of battery charge for effective operation of the machine
- Compact size (810 mm)
- Stability even when fully loaded, front independent wheeldrive with tight steering radius
- Recovery tank control window for cleaning and easy ordinary maintenance
- Easy access to electrical components
- Automatic device that stops brushes and detergent water outflow when the machine is stationary
- Self-levelling brushes.

Standard equipment:



Comfort XS-R 75

- 2 x 5.511.1168
PP brush Ø 360 mm - 14"



Comfort XS-R 85

- 2 x 5.511.1688
PP brush Ø 430 mm - 17"



Comfort XS-R 75

- 4.508.0646
Front squeegee blade L.925 mm
Shore 40 Th. 3 mm
- 4.508.0605
Rear squeegee blade L.1015 mm
Shore 30 Th. 4 mm

Comfort XS-R 85

- 4.508.1196
Front squeegee blade L.1027 mm
Shore 40 Th. 3 mm
- 4.508.1195
Rear squeegee blade L.1150 mm
Shore 33 Th. 4 mm



Watch the video on youtube:
www.youtube.com/lavorpro

	Comfort XS-R 75 Essential	Comfort XS-R 85 Essential
code	8.574.4001	8.574.4003
power supply	24V	24V
scrubbing / squeegee width	750 / 900 mm	850 / 1000 mm
max working capacity	3750 m ² /h	4100 m ² /h
solution tank capacity	110 l / 29.05 gal	110 l / 29.05 gal
recovery tank capacity	130-155 l / 34.35-40.95 gal	130-155 l / 34.35-40.95 gal
traction type / power	front motorwheel / 600 W	front motorwheel / 600 W
RPM / pressure on the brushes	170/50 kg / 110.23 lbs	170/50 kg / 110.23 lbs
brush motor power	2 x 400 W	2 x 400 W
max gradient empty/full tank	13% / 10%	13% / 10%
depression / vacuum motor	1300 mmH ₂ O/400W	1300 mmH ₂ O/400W
dimensions / weight	146x81x138 cm / 220 kg	146x81x138 cm / 220 kg



The detergent water tank serves as battery compartment, allowing the housing of great capacity batteries granting continuous working time up . Large capacity shock and acid proof polyethylene tank (110 l) improves productivity avoiding frequent refilling and idle time.

Simple and intuitive controls reduce operator's training time. Easy mechanical brush plate and squeegee lifting system, for low maintenance costs. The enbloc brush plate apply a very high pressure (50 kg) to the floor, strongly and deeply removing any kind of dirt.



New control panel with digital controls and display. Digital display: with hour meter, battery charge level indicator, forward/reverse traction indicator. Speed control adjustment, horn, suction motor switch with delayed switch-off, brush plate lifting/lowering selector switch, brush motor switch.



The ergonomic and comfortable shape of the machine allows the operator to work effortless for a long time, improving productivity.



Optional accessories:



- 4 x 0.107.0004
Tubular battery Pb-acid
6V 180Ah C5



- 4 x 0.107.0072
GEL Battery 6 MFP 180
6V 180Ah C5



- 0.108.0002
Battery Charger 24V 25A
220-240/50-60



- 5.511.1641
On-board Battery charger
kit - 24V - 20A



- 4.508.0901 Polyurethane
front blade L.925 TH.3 Sh.40
- 4.508.0900 Polyurethane
rear blade L.1015 TH.4 Sh.40

- 4.508.1251 Polyurethane
front blade L.1027 TH.3
- 4.508.1252 Polyurethane
rear blade L.1150 TH.4



- 2x 5.511.1246
Tynex brush Ø 360 mm-14"
- 2x 5.511.1169
PP 0,03 brush Ø 360 mm-14"
- 2x 5.511.1203
PES brush Ø 360 mm - 14"

- 2x 5.511.1713
Tynex brush Ø 430 mm-17"
- 2x 5.511.1711
PP 0,03 brush Ø 430 mm-17"
- 2x 5.511.1712
PES brush Ø 430 mm - 17"



- 2x 5.511.1592
EWU pad driver Ø 380 mm-15"
- 2x 5.511.1095
EWU pad driver Ø 430 mm-17"



- 6.508.0143 - Ø 380 mm -
15"- beige (5 pcs.)
- 6.508.0144 - Ø 380 mm -
15"- green (5 pcs.)
- 6.508.0141 - Ø 380 mm -
15"- black (5 pcs.)
- 6.508.0032 - Ø 430 mm -
17"- beige (5 pcs.)
- 6.508.0039 - Ø 430 mm -
17"- green (5 pcs.)
- 6.508.0046 - Ø 430 mm -
17"- black (5 pcs.)

Comfort XS-R Up



- Capable to work for the maintenance and deep cleaning of large areas (up to 4.000 m²) with a considerable reduction of cleaning costs
- More than 50 kg of constant pressure on the brushes
- Large load tank capacity, resulting in reduced number of stops and maximum use of battery charge for effective operation of the machine
- Compact size (810 mm)
- Stability even when fully loaded, front independent wheeldrive with tight steering radius
- Recovery tank control window for cleaning and easy ordinary maintenance
- Automatic brush plate lifting system
- Automatic squeegee lifting system
- Automatic squeegee lifting while reverse going
- Automatic device that stops brushes and detergent water outflow when the machine is stationary
- Antifoam device
- Self-levelling brushes
- Integrated on-board battery charger.

Standard equipment:




Comfort XS 75 Up

- 2 x 5.511.1168
PP brush Ø 360 mm - 14"



Comfort XS 85 Up

- 2 x 5.511.1688
PP brush Ø 430 mm - 17"



Comfort XS 75 Up

- 4.508.0646
Front squeegee blade L.925 mm
Shore 40 Th. 3 mm
- 4.508.0605
Rear squeegee blade L.1015 mm
Shore 30 Th. 4 mm

Comfort XS 85 Up

- 4.508.1196
Front squeegee blade L.1027 mm
Shore 40 Th. 3 mm
- 4.508.1195
Rear squeegee blade L.1150 mm
Shore 33 Th. 4 mm



- 0.108.0054
On-board Battery charger
24V 20A



Watch the video on youtube:
www.youtube.com/lavorpro

	Comfort XS-R 75 Up	Comfort XS-R 85 Up
code	8.574.4101	8.574.4103
power supply	24V (battery charger included)	24V (battery charger included)
scrubbing / squeegee width	750 / 900 mm	850 / 1000 mm
max working capacity	3750 m ² /h	4100 m ² /h
solution tank capacity	110 l / 29.05 gal	110 l / 29.05 gal
recovery tank capacity	130-155 l / 34.35-40.95 gal	130-155 l / 34.35-40.95 gal
traction type / power	front motorwheel / 600 W	front motorwheel / 600 W
RPM / pressure on the brushes	170/50 kg / 110.23 lbs	170/50 kg / 110.23 lbs
brush motor power	2 x 400 W	2 x 400 W
max gradient empty/full tank	13% / 10%	13% / 10%
depression / vacuum motor	1300 mmH ₂ O/400W	1300 mmH ₂ O/400W
dimensions / weight	146x81x138 cm / 220 kg	146x81x138 cm / 220 kg



The easy access to the recovery tank allows fast cleaning and sanitification of the tank; the tilting tank together with a large size drain hose allow the complete emptying of the tank and the removal of any type of solid dirt. The antifoam device protects suction motor, as well as the electronic floating switch that stops suction when the tank is full.

Optional accessories:



- 4 x 0.107.0004
Tubular battery Pb-acid
6V 180Ah C5



- 4 x 0.107.0072
GEL Battery 6 MFP 180
6V 180Ah C5



- 4.508.0901 Polyurethane
front blade L.925 TH.3 Sh.40
- 4.508.0900 Polyurethane
rear blade L.1015 TH.4 Sh.40
- 4.508.1251 Polyurethane
front blade L.1027 TH.3
- 4.508.1252 Polyurethane
rear blade L.1150 TH.4



- 2x 5.511.1246
Tynex brush Ø 360 mm-14"
- 2x 5.511.1169
PP 0,03 brush Ø 360 mm-14"
- 2x 5.511.1203
PES brush Ø 360 mm - 14"



- 2x 5.511.1713
Tynex brush Ø 430 mm-17"
- 2x 5.511.1711
PP 0,03 brush Ø 430 mm-17"
- 2x 5.511.1712
PES brush Ø 430 mm - 17"



- 2x 5.511.1592
EWU pad driver Ø 380 mm-15"
- 2x 5.511.1095
EWU pad driver Ø 430 mm-17"



- 6.508.0143 - Ø 380 mm -
15"- beige (5 pcs.)
- 6.508.0144 - Ø 380 mm -
15"- green (5 pcs.)
- 6.508.0141 - Ø 380 mm -
15"- black (5 pcs.)
- 6.508.0032 - Ø 430 mm -
17"- beige (5 pcs.)
- 6.508.0039 - Ø 430 mm -
17"- green (5 pcs.)
- 6.508.0046 - Ø 430 mm -
17"- black (5 pcs.)

Comfort XS-R Up is equipped with actuators for the automatic lifting of the brush plate and squeegee. New control panel with digital controls and display. Digital display: with hour meter, battery charge level indicator, empty water tank level indicator and forward/reverse traction indicator. Speed control adjustment, horn, suction motor



switch with delayed switch-off, brush plate lifting/lowering selector switch, brush motor switch. All motors are protected by thermal breakers. The detergent water tank serves as battery compartment, allowing the housing of great capacity batteries. Battery charger and suction motor are placed the recovery tank; the housing of the



vacuum motor allows to drastically reduce the operating noise. The ergonomic and comfortable shape of the machine allows the operator to work effortless for a long time, improving productivity. Thanks to the compact dimensions the machine can work with agility even in narrow spaces.



Comfort S-R



Standard equipment:



- 2 x 5.511.1845
PP brush Ø 457 mm - 18"



- 4.508.1196
Front squeegee blade L.1027 mm
Shore 40 Th. 3 mm

- 4.508.1195
Rear squeegee blade L.1150 mm
Shore 33 Th. 4 mm



- Suitable for maintenance and deep cleaning of medium and large areas (up to 4.500 m²) with a considerable reduction of cleaning costs
- More than 50 kg of constant pressure on the brushes
- Large load tank capacity, resulting in reduced number of stops and maximum use of battery charge for effective operation of the machine
- Compact size
- Stability even when fully loaded
- Front independent wheel-drive with tight steering radius
- Easy access to electrical components
- Automatic brush plate lifting system
- Automatic squeegee lifting system
- Automatic squeegee lifting while reverse going
- Automatic device that stops brushes and detergent water outflow when the machine is stationary
- Antifoam device
- Self-levelling brushes
- High-performance batteries resulting in high-working efficiency.



Watch the video on youtube:
www.youtube.com/lavorpro

Comfort S-R 90

code	8.575.0010
power supply	24V
scrubbing / squeegee width	900 / 1000 mm
max working capacity	6200 m ² /h
solution tank capacity	140 l / 36.99 gal
recovery tank capacity	150-180 l / 39.6-47 gal
traction type / power	front motorwheel / 1000 W
RPM / pressure on the brushes	150/50 kg / 176 lbs
brush motor power	1250 W
max gradient empty/full tank	10% / 7%
depression / vacuum motor	1734 mmH ₂ O/550W
dimensions / weight	180x103x150 cm / 270 kg



Quick lock recovery tank cap allows for fast and easy cleaning and sanitization of the tank; the tilting tank together with a large size drain hose allow the complete emptying of the tank and the removal of any type of solid dirt. The antifoam device protects suction motor, as well as the electronic floating switch that stops suction when the tank is full.

Optional accessories:



- 0.107.0008
Battery box Pb-acid
24V 500Ah C5

- 0.107.0011
Gel battery box
24V 400Ah C5



- 0.108.0003
Battery Charger 24/36V
50/60A - 220-240/50-60

Comfortable steering wheel.
User friendly control panel, provided with hour meter, speed adjustment knob and detergent solution low level warning light.
All motors are protected by thermal breakers.



- 4.508.1251 Polyurethane front blade L.1027 TH. 3
- 4.508.1252 Polyurethane rear blade L.1150 TH. 4



- 2x 5.511.1848
Tynex brush Ø 457 mm-18"
- 2x 5.511.1849
PP 0,03 brush Ø 457 mm-18"
- 2x 5.511.1847
PES brush Ø 457 mm-18"



- 2x 5.511.1850
EWU pad driver Ø 457 mm-18"



- 6.508.0150 - Ø 457 mm-18"-beige (5 pcs.)
- 6.508.0151 - Ø 457 mm-18"-green (5 pcs.)
- 6.508.0142 - Ø 457 mm-18"-black (5 pcs.)



50 kg of continuous brush plate pressure with Self Leveling System to strongly and deeply removing any kind of dirt on any kind of floor.
Strong oil-proof polyurethane wheels.
500 Ah C5 battery box allowing continuous working time up to 5 hours.

Built with strong components, Comfort S-R have been designed to resist even to extreme stresses; the frame is made of steel profiles with a thickness varying from 5 to 12 mm, protected with a high resistance corrosion-proof paint.



Comfort M



- Suitable for maintenance and deep cleaning of medium and large areas (up to 6.000 m²)
- More than 90/120 kg of constant pressure on the brushes
- Large load tank capacity, resulting in reduced number of stops and maximum use of battery charge for effective operation of the machine
- Stability even when fully loaded
- Front independent wheel-drive with tight steering radius
- Easy access to electrical components
- Automatic brush plate lifting system
- Automatic squeegee lifting system
- Automatic squeegee lifting while reverse going
- Automatic control system for brush rotation and detergent water outflow
- Antifoam device
- Self-levelling brush plate
- Hour meter
- High-performance batteries resulting in high-working efficiency.

Standard equipment:



- 2 x 5.511.1097
PP brush Ø 483 mm - 19"



- 4.508.0217
Front squeegee blade L.1270 mm
Shore 40 Th. 4 mm
- 4.508.0216
Rear squeegee blade L.1345 mm
Shore 33 Th. 6 mm



Watch the video on youtube:
www.youtube.com/lavorpro

Comfort M 102

code	8.578.0004
power supply	36V
scrubbing / squeegee width	1020 / 1250 mm
max working capacity	7140 m ² /h
solution tank capacity	200 l / 52.84 gal
recovery tank capacity	210-240 l / 55.5-63.4 gal
traction type / power	front motorwheel / 900 W
RPM / pressure on the brushes	150/120 kg / 246 lbs
brush motor power	1500 W
max gradient empty/full tank	10% / 8%
depression / vacuum motor	1800 mmH ₂ O / 600 W
dimensions / weight	190x112x145 cm / 375 kg



The unique anti foam device dramatically reduces the foam generation and prevents it from touching the suction motor, thus protecting its operation. The electronic floating switch stops suction when the tank is full. Large tank opening for fast and easy cleaning and sanification.

The strong V-shaped floor squeegee made of steel profile is widely adjustable and allows to combine the operation of the rubber blades with the high suction power, to get a perfect drying result on every surface. The special filter box retains solid debris and prevents the obstruction of the suction hose.



Comfort M scrubbers are easy to use thanks to the simple and user friendly controls. From the control panel the operator can adjust the maximum forward speed and the quantity of cleaning solution outflow, selecting the options most suitable to the dirt type. Job is simplified and made faster by the automatic lifting of the squeegee and of the brush plate.

Thanks to the optimal weight distribution and to the use of strong oil-proof polyurethane wheels the drive is perfect in all working conditions. The emptying of the solution water tank is quick with a simple and easy accessible mechanical tap.



Optional accessories:



• 0.107.0009
Battery box Pb-acid
36V 360Ah C5

• 0.107.0012
Gel battery box
36V 320Ah C5



• 0.108.0003
Battery Charger 24/36V
50/60A - 220-240/50-60



• 4.508.1167 Polyurethane
front blade L.1270 TH. 4
• 4.508.0897 Polyurethane
rear blade L.1345 TH. 6



• 2x 5.511.1098
Tynex brush Ø 483 mm-19"

• 2x 5.511.1128
PP 0,03 brush Ø 483 mm-19"

• 2x 5.511.1206
PES brush Ø 483 mm - 19"



• 2x 5.511.1099
EWU pad driver Ø 483 mm-19"



• 6.508.0034 - Ø 483 mm -
19"- beige (5 pcs.)
• 6.508.0041 - Ø 483 mm -
19"- green (5 pcs.)
• 6.508.0048 - Ø 483 mm -
19"- black (5 pcs.)

Comfort L



Standard equipment:



- 3 x 5.511.1109
PP brush Ø 406 mm - 16"



- 4.508.0219
Front squeegee blade L.1500 mm
Shore 40 Th. 4 mm
- 4.508.0218
Rear squeegee blade L.1580 mm
Shore 33 Th. 6 mm



- Suitable for maintenance and deep cleaning of medium and large areas (up to 7.000 m²)
- More than 120-170 kg of constant pressure on the brushes
- 300 litres solution tank capacity allows exceptional autonomy and productivity
- Stability even when fully loaded
- Innovative traction system with three independent motor wheels controlled by electronic cards
- Easy access to electrical components
- Automatic brush plate lifting system
- Automatic squeegee lifting system
- Automatic squeegee lifting while reverse going
- Automatic control system for brush rotation and detergent water outflow
- Antifoam device
- Self-levelling brushes, hour meter, solenoid valve. High-performance batteries resulting in high-working efficiency.

Comfort L 122

code	8.572.0002
power supply	36V
scrubbing / squeegee width	1220 / 1450 mm
max working capacity	8540 m ² /h
solution tank capacity	280 l / 73.97 gal
recovery tank capacity	315-340 l / 83.2-89 gal
traction type / power	3-wheels drive / 3 x 600 W
RPM / pressure on the brushes	150/170 kg / 374 lbs
brush motor power	3 x 1000 W
max gradient empty/full tank	15% / 14%
depression / vacuum motor	1800 mmH ₂ O / 600 W
dimensions / weight	222x130x169 cm / 585 kg



Designed to perform the hardest work and to resist even to extreme stresses with maximum comfort; the frame is made of steel profiles with a thickness varying from 5 to 12 mm, protected with a high resistance corrosion-proof paint.

Optional accessories:



- 0.107.0010 Battery box Pb-acid 36V 525 Ah C5
- 0.107.0013 Gel battery box 36V 400 Ah C5



- 0.108.0003 Battery Charger 24/36V 50/60A - 220-240/50-60



- 4.508.1167 Polyurethane front blade L.1270 TH. 4
- 4.508.0897 Polyurethane rear blade L.1345 TH. 6



- 3x 5.511.1110 Tynex brush Ø 406 mm-16"
- 3x 5.511.1120 PP 0,03 brush Ø 406 mm-16"
- 3x 5.511.1204 PES brush Ø 406 mm - 16"



- 3x 5.511.1111 EWU pad driver Ø 406 mm-16"



- 6.508.0031 - Ø 406 mm - 16"- beige (5 pcs.)
- 6.508.0038 - Ø 406 mm - 16"- green (5 pcs.)
- 6.508.0045 - Ø 406 mm - 16"- black (5 pcs.)

The unique anti foam device dramatically reduces the foam generation and prevents it from touching the suction motor, thus protecting its operation. The electronic floating switch stops suction when the tank is full. Large tank opening for fast and easy cleaning and sanification.



The cleaning solution tank with an exceptional capacity of 300 liters and the high autonomy of the battery ensure a productivity at the top of the range. The wide rear opening allows for an easy and quick refilling of the cleaning solution tank.

The motorwheels, designed and built by LAVOR, grant optimal performances and exceptional reliability (over 30.000 hours). The innovative three-wheel drive system ensures perfect traction in every operating condition. The high power of the three motorwheels allows the machine to get over remarkable slopes.



Is it better a petrol engine driven or a battery powered model?

The use of a petrol engine implies the presence of exhaust gasses and therefore the machine must be used only in outside areas or in areas where the operator is not exposed at such risk. The battery models can be used also inside. From the technical and qualitative point of view the sweepers do exactly the same cleaning task, but the petrol engine machine can work nonstop (it is only necessary to fill up the tank with petrol), while the electric models, once the battery is empty, need to be re-charged (an average of 8-10 hours of charge, if battery is completely worn-out)

How should the brush be?

In the sweepers, there are two types of bushes: the first one rotates with a perpendicular axle to the floor (this is the one called "side brush"), it is useful to move dirt into the collecting area and to reach dirt near borders or under edges; the second one rotates with a parallel axle to the floor (this is the one called "main brush"); it rotates counterclockwise (opposite) to the forward direction of machine and collects dirt into the collection tank. The brushes differ in the shape (round flat the "side brush" and cylindrical the "main brush"), in the type of bristles (the way bristles are arranged on the brush body), in the body material (that accordingly to options, provides resistance still in humid environment or competitive construction) and in the bristle material /diameter/shape. Generally, the stiffer and rougher the bristles are, the better they collect the heaviest dirt adherent to the floor (typically wet leaves). The more flexible and thinner the bristles are, the better they collect light and thin dirt. To have a better scraping action, it is necessary to add steel bristle to the PP ones. To collect very thin dirt, it is necessary to use only short round PP bristles. As a consequence of motorization (petrol engine or electric one) and so of indoor or outdoor use, the walk behind models have stiffer or softer bristles, to adapt in best way possible to the type of dirt typically found in the working area.



How long do battery charges last?

It is impossible to determine exactly how long a battery charge lasts.

Battery autonomy changes depending on type of surface, dirt quantity, brush type and way in which traction system is used (speed and slope).

Battery life is made up of number of charge cycles (also incomplete), if use conditions, charge and service are perfectly observed.

Manufacturing technology diversifies numbers of cycles, service needed, use/charge conditions and performances.

Which kind of battery technology?

Batteries have different prices and so it is important to know their features in order to choose the best one as far as the operator's needs or habits are concerned.

They divide into two families according to the necessity of recurrent acid solution refilling.

Acid lead batteries (Pb-Acid), need refilling, because during the charge cycle a lot of gasses are generated (for this reason a specific and aired room is necessary for safe working) and the solution vaporizes: it is necessary to add distilled water before the submerged lead parts that are no more covered with water begin to oxidize (compromised efficiency).

VRLA batteries (Valve Regulated Lead Acid) are airtight, this means that gasses generated during the charge cycle are rearranged inside the battery: refilling is not necessary,

it is possible to charge them in any room and they can be carried without risk.

Acid lead batteries divide themselves into categories depending on the thickness of plate they are built of: if the plate is plane, the resistance to discharge is lower and few charge cycles are necessary, if the plate is tubular (or armed, recognizable opening the battery cap and verifying that the plate is made up of a lot of cylinders side by side instead of a thin leaf sheet) there is a higher resistance to discharge and to charge cycles.

VRLA batteries divide themselves depending on the condition (liquid or gel) of the acid solution (that enables energy exchange) and on the way it is kept inside the battery: if it is liquid and kept by a spongy and filamentous material, the battery is called AGM; if it is a gel solution inside a membrane, the battery is called GEL battery. On the market there are a lot of products completely different in features and value and it is very important to know the manufacturing details to couple the right battery charger (it is not sure that any battery charger is suited and get a better result than the ones in our range that are specific for our batteries) and to come up to the working expectations.

Whatever technology may be it is important to know that batteries have a common effect of self discharge (different for each type of manufacturing technology) and so it is important a recurrent charge (each three months approximately) if they are unused for long periods of time. Batteries suffer from incomplete charge cycle (except "pure lead" technology) and so it is necessary to charge them at the end of the working day (our battery charger is going to supply only the necessary energy and the charge cycle is going to finish earlier). It is also important not to cut off the charge before the battery charger has finished the cycle (green light). Respecting these simple rules, the best result and the best machine output will be obtained.




- **Belt drive**

The circular section grants a high resistance, stillness, reliability and it doesn't need service.



- **Side brush exclusion**

It is a system protecting bristles during machine stop or whenever it is not necessary to use it.



- **Dust vacuum system**

It can be found in the main brush area. Together with the mechanical action, it conveys waste and dust that are collected into the tank through the right filters supplied.



- **Front dust vacuum system**

As well as traditional vacuum system, a vacuum system can be found in the lateral brush/es collection area. Dust dispersion outside the machine is limited also before the main collection area is reached.




- **Flap raise system**

The main brush collection area is delimited by protections (flaps) touching the ground, better vacuum effect. With a big residual it is possible to raise the flap collecting it rather than keep going pushing it on the floor.



- **Filter shaker**

It clears filter from dust without touching it or opening the sweeper; the vacuum efficiency is kept at max, granting the best comfort and output for the user.

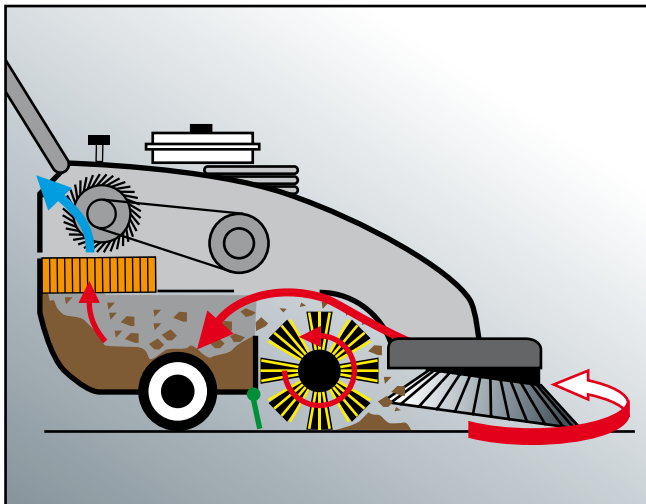



BSW 375 ET

BSW 651 M

SWL 700 ET

SWL 700 ST

SWL 900 ET

SWL 900 ST

SWL R 850 ET

SWL R 1000 ET

SWL R 1000 ST

SWL R 1000 ET Bin-Up

SWL R 1000 ST Bin-Up

SWL R 1100 ET

SWL R 1100 ST

Code	Model	Page	Type	Traction	Main brush width	Main brush + 1 side brush	Main brush + 2 side brushes	Collector tank	Max working capacity	Packaging dimensions	Weight with packaging	Weight with packaging	Pcs x pallet
					mm / inc	mm / inc	mm / inc	lt/gal	m ² / foot ²	L x l x H cm / inc	kg	lbs	n°
0.064.0001	BSW 375 ET	153	electric	Manual	350/13,78	-	375/14,76	2/0,52	1000/10764	41x61x16/16x24x6	4,8	6,16	48
0.042.0101	BSW 651 M	154	manual	Manual	500/19,68	700/27,56	-	40/10,58	1500/16146	78x77x44/31x30x17	25	55	5
0.061.0001	SWL 700 ET	155	electric	Mechanical	510/20,08	680/26,77	-	45/11,89	2620/28201	126x63x85/50x25x34	78	172	1
0.061.0002	SWL 700 ST	155	gasoline motor	Mechanical	510/20,08	680/26,77	-	45/11,89	2620/28201	126x63x85/50x25x34	77	169	1
0.061.0003	SWL 900 ET	156	electric	Mechanical	710/27,95	880/34,64	-	60/15,85	3700/39826	126x83x85/50x33x34	89	196	1
0.061.0004	SWL 900 ST	156	gasoline motor	Mechanical	710/27,95	880/34,64	-	60/15,85	3700/39826	126x83x85/50x33x34	97	213	1
0.061.0005	SWL R 850 ET	157	electric	hydraulic	650/25,59	850/33,46	-	55/14,53	4900/52743	115x80x120/45x31x47	186	409	1
0.061.0006	SWL R 1000 ET	158	electric	hydraulic	700/27,56	920/36,22	1230/48,42	62/16,38	6200/66735	143x91x114/56x36x45	260	572	1
0.061.0007	SWL R 1000 ST	158	gasoline motor	hydraulic	700/27,56	920/36,22	1230/48,42	62/16,38	8280/89124	143x91x114/56x36x45	300	660	1
0.061.0008	SWL R 1000 ET BINUP	159	electric	hydraulic	700/27,56	920/36,22	1230/48,42	62/16,38	6200/66735	163x91x114/66x36x45	310	682	1
0.061.0030	SWL R 1000 ET BINUP	159	electric	hydraulic	700/27,56	920/36,22	1230/48,42	62/16,38	6200/66735	163x91x114/66x36x45	310	682	1
0.061.0009	SWL R 1000 ST BINUP	159	gasoline motor	hydraulic	700/27,56	920/36,22	1230/48,42	62/16,38	8280/89124	163x91x114/66x36x45	350	770	1
0.061.0036	SWL R 1100 ET	160	electric	hydraulic	800/31,50	1050/41,34	1300/51,18	115/30	9700/104409	160x101x130/65x43x52	375	825	1
0.061.0033	SWL R 1100 ST	160	Diesel motor	hydraulic	800/31,50	1050/41,34	1300/51,18	115/30	9700/104409	160x101x130/65x43x52	434	955	1





BSW 375 ET



Space-saving storage position.

Standard accessories:



0.964.0017
Cylinder brush



0.964.0018
2 x Side brush



2 x 0.964.0002
10.8V Lithium-Ion
battery



0.964.0001
Battery charger



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- Industrial battery-powered sweeper for the quick, quiet and cordless intermediate cleaning of all surfaces, indoor and outdoor. • Ideal for entryways of all kinds, hallways, staircases, driveways, warehouse and office areas, airports and train stations. • Equipped with two batteries, the operation time lengthens to 90 minutes. • The powerful Lithium-Ion battery (without memory effect) with 10.8 V and 1.5 Ah allows an operation time of approx. 45 minutes per battery.
- Second battery can be directly stored and carried on the machine itself. • Quick-charging unit with a charging time of only 70 minutes is included with purchase. • Large foot pedal for activation without bending over. • Main cylinder brush and side brushes can be replaced without tools.
- Aluminum telescopic handle for an optimum work position. • Traceless wheels. • Enormous waste collection tray with 2 liter capacity. • Changeable bristled rim on the underside of the housing.
- Low noise volume, and therefore excellent for use during business hours. • Compact, light, and easy-to-handle for any user.

BSW 375 ET

code	0.064.0001
main brush + 2 side brush width	375mm / 14,76 inc
collector tank	2 li / 0,52 gal
max working capacity	1000 m ² /h-10764 ft ²
Operating voltage	10,8V/1,5 Ah
Max. Power	25 W
Voltage (charging unit)	230 V~50 Hz
dimension / weight	30x36x70cm / 2,8 kg

BSW 651 M



Standard accessories:



0.942.0050 PP



0.942.0078 PP

Optional:

0.942.0079 Mixed steel side brush



Equipped with:

- Ideal for small and medium surfaces • Easy handling • Wide collector tank with safety lock
- Side brush lifting • Main brush pressure regulation • Separate side brush • Adjustable working load on the brush • Tilting handle • 360° front wheel • Die casting brush arm
- Traceless wheels • Shock proof frame • Hourly efficiency (max) 1500 m²/h. • Working area (1 side brush) 500-700 mm.

	BSW 651 M
code	0.042.0101
main brush width	500mm / 19,68 inc
main brush + 1 side brush width	700mm / 27,56 inc
collector tank/emptying system	40 lt -10,58 gal / manual
max working capacity	1500 m ² /h - 16146 ft ²
traction	manual
brushes transmission	elastic belt
pressure on the brushes	adjustable
side brush	lifting arm system
dust-laying system	direct
frame material	steel
dimension / weight	79 x 76 x 46 cm/25 kg



ELECTRIC FILTER SHAKER
(electric version)



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- Ideal for medium and large surfaces
- Large filter surface with electric filter shaker (ET model)
- Manual filter shaker (ST model)
- Side brush raising control
- Suction switch off
- Flap raise system
- Panel filter in horizontal position
- Main brush pressure regulation
- Indirect back collection
- Quick main brush release
- Long life elastic belts
- Reclining handle
- Suction selection lever. Traction lever. Antistatic device. Wide collector tank
- Heavy duty steel frame
- Side brush mechanical engagement
- Battery and battery charger not included.

SWL 700 ST



Standard accessories:



0.961.0008
PP SWL 700 ET

0.961.0012
PP-Mixed steel
SWL 700 ST



0.961.0005 PP



0.961.0001
paper filter 14 µm

Optional:



0.961.0028 Side
brush protection



0.961.0016
PE panel filter
5µm



0.961.0018
HEPA panel
filter



Batteries



Battery charger

• 0.961.0026 Trolley for collector tank set



SWL 700 ET

	SWL 700 ET	SWL 700 ST
code	0.061.0001	0.061.0002
main brush width	510mm / 20,08 inc	510mm / 20,08 inc
main brush + 1 side brush width	680mm / 26,77 inc	680mm / 26,77 inc
collector tank	45 lt / 11,89 gal	45 lt / 11,89 gal
max working capacity	2620 m ² /h-28201 ft ²	2620 m ² /h-28201 ft ²
traction	mechanical	mechanical
max speed	4 km/h-2,49 mile/h	4 km/h-2,49 mile/h
motor type / power	12V / 400W	Honda 4 HP / 2,9kW
filtering surface	2 m ² / 21,53 ft ²	2 m ² / 21,53 ft ²
pressure on the brushes	adjustable	adjustable
filter shaker	electric	manual
dimension / weight	126x63x85cm / 78kg	126x63x85cm / 77kg

SWL 900 ET



**ELECTRIC
FILTER SHAKER**
(electric version)



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- Ideal for medium and large surfaces
- Large filter surface with electric filter shaker (ET model)
- Manual filter shaker (ST model)
- Side brush raising control
- Suction switch off
- Flap raise system
- Panel filter in horizontal position
- Main brush pressure regulation
- Indirect back collection
- Quick main brush release
- Long life elastic belts
- Reclining handle
- Suction selection lever
- Traction lever
- Antistatic device
- Wide collector tank
- Heavy duty steel frame
- Side brush mechanical engagement
- Battery and battery charger not included.

SWL 900 ST



Standard accessories:



0.961.0009
PP SWL 900 ET

0.961.0013
PP-Mixed steel
SWL 900 ST



0.961.0005 PP



0.961.0002
paper filter 14 µm

Optional:



0.961.0028 Side
brush protection



0.961.0017
PE panel filter
5µm



0.961.0019
HEPA panel
filter



Batteries



Battery charger

- 0.961.0027 Trolley for collector tank set

	SWL 900 ET	SWL 900 ST
code	0.061.0003	0.061.0004
main brush width	710mm / 27,95 inc	710mm / 27,95 inc
main brush + 1 side brush width	880mm / 34,64 inc	880mm / 34,64 inc
collector tank	60 lt / 15,85 gal	60 lt / 15,85 gal
max working capacity	3700m ² /h-39826 ft ²	3700m ² /h-39826 ft ²
traction	mechanical	mechanical
max speed	4 km/h-2,49mile/h	4 km/h-2,49mile/h
motor type / power	12V / 400W	Honda 4 HP / 2,9kW
filtering surface	3,02 m ² / 32,50 ft ²	3,02 m ² / 32,50 ft ²
pressure on the brushes	adjustable	adjustable
filter shaker	electric	manual
dimension / weight	126x83x85 cm / 89 kg	126x83x85 cm / 97 kg

SWL R 850 ET

**ELECTRIC
FILTER SHAKER**



Standard accessories:



0.961.0010 PP



0.961.0006 PP



5 x 0.961.0003
paper filter 14 µm

Optional:

- Cartridge polyester filter
code: 0.961.0020

- Hepa cartridge filter
code: 0.961.0180



0.961.0021 Left
side arm brush (with
brush)



Batteries



Battery charger

Equipped with:

- Ideal for large surfaces • Large filter surface distributed on 5 cartridge filters fitted with electric filter shaker • Side brush raising control • Suction switch off • Flap raise system
- Flashing light • Main brush pressure regulation • Indirect back collection • Front dust vacuum system • Quick changing of the main brush and side brush without tools • Long life elastic belts
- Suction selection lever • Shock proof steel frame • Traction lever • Antistatic device • Wide collector tank • Heavy duty steel frame • Perfectly balanced weight of the components, thus resulting in totally safe quick changes of direction • Battery and battery charger not included.

SWL R 850 ET

code	0.061.0005
main brush width	650 mm / 25,59 inc
main brush + 1 side brush	850 mm / 33,46 inc
collector tank	55 lt / 14,53 gal
max working capacity	4900 m ² /h-52743 ft ²
traction / limiting gradient	front wheels / 14%
max speed	5,8 km/h-3,60 mile/h
motor type / power	24V / 1670 W (5 motors)
filtering surface	4 m ² / 43,06 ft ²
pressure on the brushes	adjustable
filter shaker	electric
dimension / weight	115x80x120cm/186 kg

SWL R 1000 ET SWL R 1000 ST

**ELECTRIC
FILTER SHAKER**



Equipped with:

- Ideal for large surfaces • Large filter surface distributed on 6 cartridge filters fitted with electric filter shaker • Side brush raising control • **Complete right/left side brush** • Suction switch off
- Lift flap pedal • Flashing light • Main brush pressure regulation • Indirect back collection • Front dust vacuum system • Quick changing of the main brush and side brush without tools • Long life elastic belts
- Suction selection lever • Shock proof steel frame • Traction lever • Antistatic device • Battery level indicator • Wide collector tank • Heavy duty steel frame • Adjustable seat • Perfectly balanced weight of the components, thus resulting in totally safe quick changes of direction • Battery and battery charger not included. • Front light system (optional on request), standard for model code 0.061.0030.

Watch the video on youtube:
www.youtube.com/lavorpro



Standard accessories:



0.961.0011
PP SWL R 1000 ET



0.961.0015
PP-Mixed steel SWL R
1000 ST



2 x 0.961.0007
PP SWL R 1000 ET



2 x 0.961.0023
PP-Mixed steel SWL R
1000 ST



6 x 0.961.0004
paper filter 14 µm

Optional:

- Steel collector tank
code: 0.961.0029
- Front light system
(on request)
- Anti-trace wheels,
code: 0.961.0031
- Polyester filters
code: 0.961.0024
- Hepa filters
code: 0.961.0025



0.961.0030 Side
brush protection

	SWL R 1000 ET	SWL R 1000 ST	SWL R 1000 ET*	SWL R 1000 ST*
code	0.061.0006	0.061.0007	0.061.0030	0.061.0039
main brush width	700 mm / 27,56 inc	700 mm / 27,56 inc	700 mm / 27,56 inc	700 mm / 27,56 inc
main brush + 1 side brush	920 mm / 36,22 inc	920 mm / 36,22 inc	920 mm / 36,22 inc	920 mm / 36,22 inc
main brush + 2 side brushes	1230 mm / 48,42 inc	1230 mm / 48,42 inc	1230 mm / 48,42 inc	1230 mm / 48,42 inc
collector tank	62 lt / 16,38 gal	62 lt / 16,38 gal	62 lt / 16,38 gal	62 lt / 16,38 gal
max working capacity	6200 m ² /h-66736 ft ²	8280 m ² /h-89125 ft ²	6200 m ² /h-66736 ft ²	8280 m ² /h-89125 ft ²
traction / limiting gradient	rear wheels / 12%	front wheel / 14%	rear wheels / 12%	front wheel / 14%
max speed	5,8 km/h-3,60 mile/h	5,8 km/h-3,60 mile/h	5,8 km/h-3,60 mile/h	5,8 km/h-3,60 mile/h
motor type / power	24V / 1150W	Honda 5,5 HP / 4,1kW	24V / 1150W	Honda 5,5 HP / 4,1kW
filtering surface	6 m ² / 64,6 ft ²	6 m ² / 64,6 ft ²	6 m ² / 64,6 ft ²	6 m ² / 64,6 ft ²
filter shaker	electric	electric	electric	electric
dimension / weight	143x91x114cm/260kg	143x91x114cm/300kg	143x91x114cm/260kg	143x91x114cm/300kg



SWL R 1000 ET Bin-Up
SWL R 1000 ST Bin-Up

**ELECTRIC
FILTER SHAKER**



Standard accessories:




0.961.0011
PP SWL R 1000 ET



0.961.0015
PP-Mixed steel SWL R
1000 ST



2 x 0.961.0007
PP SWL R 1000 ET



2 x 0.961.0023
PP-Mixed steel SWL R
1000 ST



6 x 0.961.0004
paper filter 14 µm

Optional:

- Steel collector tank
code: 0.961.0029
- Front light system
(on request)
- Anti-trace wheels,
code: 0.961.0031
- Polyester filters
code: 0.961.0024
- Hepa filters
code: 0.961.0025



0.961.0030 Side
brush protection

Equipped with:

- Ideal for large surfaces • Large filter surface distributed on 6 cartridge filters fitted with electric filter shaker • Side brush raising control • Unload device for tank emptying into dust containers up to 110 cm height • **Complete right/left side brush** • Suction switch off. • Lift flap pedal • Flashing light • Main brush pressure regulation • Indirect back collection • Front dust vacuum system • Quick changing of the main brush and side brush without tools • Long life elastic belts • Suction selection lever • Shock proof steel frame • Traction lever • Antistatic device • Battery level indicator • Wide collector tank • Heavy duty steel frame • Adjustable seat • Perfectly balanced weight of the components, thus resulting in totally safe quick changes of direction • Battery and battery charger not included. • Front light system (optional on request).

	SWL R 1000 ET BIN-UP	SWL R 1000 ST BIN-UP	SWL R 1000 ET BIN-UP*
code	0.061.0008	0.061.0009	0.061.0040
main brush width	700mm / 27,56 inc	700mm / 27,56 inc	700mm / 27,56 inc
main brush + 1 side brush	920mm / 36,22 inc	920mm / 36,22 inc	920mm / 36,22 inc
main brush + 2 side brushes	1230mm / 48,42 inc	1230mm / 48,42 inc	1230mm / 48,42 inc
collector tank	62 lt / 16,38 gal	62 lt / 16,38 gal	62 lt / 16,38 gal
max working capacity	6200m ² /h-66736 ft ²	8280m ² /h-89125 ft ²	6200m ² /h-66736 ft ²
traction / limiting gradient	rear wheels / 12%	front wheel / 14%	rear wheels / 12%
max speed	5,8km/h-3,60mile/h	5,8km/h-3,60mile/h	5,8km/h-3,60mile/h
motor type / power	24V / 1150W	Honda 5,5 HP / 4,1kW	24V / 1150W
filtering surface	6 m ² / 64,6 ft ²	6 m ² / 64,6 ft ²	6 m ² / 64,6 ft ²
filter shaker	electric	electric	electric
dimension / weight	163x91x114cm/310kg	163x91x114cm/350kg	163x91x114cm/310kg



**ELECTRIC
FILTER SHAKER**

SWL R 1100 ST SWL R 1100 ET



Standard accessories:

- 0.961.0176
PP SWL R 1100 ET
- 0.961.0178
PP-Mixed steel SWL R 1100 ST
- 2 x 0.961.0177
PP SWL R 1100 ET
- 2 x 0.961.0179
PP-Mixed steel SWL R 1100 ST
- 8 x 0.961.0003
paper filter 14 µm

Optional:


- Cartridge polyester filter
code: 0.961.0020
- Hepa cartridge filter
code: 0.961.0180

Equipped with:

- Ideal for large surfaces. • Large filter surface distributed on 8 cartridge filters fitted with electric filter shaker. • Side brush raising control. • On request DSA unload device for tank emptying into dust containers up to 145 cm height. • **Complete right/left side brush.** • Anti-trace wheels (mod.ET). • Suction switch off. • Lift flap pedal. • Flashing light. • Main brush pressure regulation. • 90° steering angle. • Electric starter. • Service and parking brake. • Hour meter and klaxon. • Antislip platform. • Indirect back collection. • Front dust vacuum system. • Quick changing of the main brush and side brush without tools. • Long life elastic belts. • Suction selection lever. • Shock proof steel frame. • Traction lever. • Antistatic device. • Battery level indicator (mod.ET). • 115 lt wide collector tank. • Heavy duty steel frame. • Adjustable seat. • Battery and battery charger not included. • **Front working light system.**

	SWL R 1100 ET	SWL R 1100 ST
code	0.061.0036	0.061.0033
main brush width	800mm / 31,50 inc	800mm / 31,50 inc
main brush + 1 side brush	1050mm / 41,34 inc	1050mm / 41,34 inc
main brush + 2 side brushes	1300mm / 51,19 inc	1300mm / 51,19 inc
collector tank	115 lt / 30 gal	115 lt / 30 gal
max working capacity	9700 m ² /h-104409 ft ²	9700 m ² /h-104409 ft ²
traction / limiting gradient	front wheels / 12%	front wheel / 20%
max speed	7,5 km/h-4,66 mile/h	7,5 km/h-4,66 mile/h
motor type / power	24V / 1,91 kW	Diesel Yanmar 6,7 Hp / 4,92 kW
filtering surface	6,4 m ² / 68,89 ft ²	6,4 m ² / 68,89 ft ²
filter shaker	electric	electric
dimension / weight	160x101x130 cm/375 kg	160x101x130 cm/434 kg

Accessories

			BSW 651 M	SWL 700 ET	SWL 700 ST	SWL 900 ET	SWL 900 ST	SWL R 850 ET	SWL R 1000 ET	SWL R 1000 ST	SWL R 1000 ET BIN-UP	SWL R 1000 ST BIN-UP	SWL R 1100 ET	SWL R 1100 ST
	0.961.0001	paper panel filter 14 micron		S	S									
	0.961.0002	paper panel filter 14 micron				S	S							
	0.961.0016	polyester panel filter 5 micron		O	O									
	0.961.0018	Hepa panel filter		O	O									
	0.961.0017	polyester panel filter 5 micron				O	O							
	0.961.0019	Hepa panel filter				O	O							
	0.961.0003	cartridge paper filter 14 micron						S					S	S
	0.961.0004	cartridge paper filter 14 micron							S	S	S	S		
	0.961.0020	cartridge polyester filter 20 micron						O					O	O
	0.961.0024	cartridge polyester filter 20 micron							O	O	O	O		
	0.961.0025	Hepa cartridge filter							O	O	O	O		
	0.961.0180	Hepa cartridge filter						O					O	O
	0.942.0037	PP side brush	S											
	0.961.0005	PP side brush		S	S	S	S							
	0.961.0006	PP side brush						S						
	0.961.0007	PP side brush							S	O	S	O		
	0.961.0177	PP side brush											S	O
	0.961.0181	mixed steel side brush		O	O	O	O							
	0.961.0023	mixed steel side brush							O	S	O	S		
	0.961.0179	mixed steel side brush											O	S
	0.942.0050	PP main brush	S											
	0.961.0008	PP - moplen body main brush - bristle d. 0,5 mm		S	O									
	0.961.0009	PP - moplen body main brush - bristle d. 0,5 mm				S	O							
	0.961.0010	PP - moplen body main brush - bristle d. 0,5 mm						S						
	0.961.0011	PP - moplen body main brush - bristle d. 0,5 mm							S	O	S	O		
	0.961.0176	PP - moplen body main brush - bristle d. 0,5 mm											S	O
		0.961.0012	mixed steel - moplen body main brush		O	S								
	0.961.0013	mixed steel - moplen body main brush				O	S							
	0.961.0014	mixed steel - moplen body main brush						O						
	0.961.0015	mixed steel - moplen body main brush							O	S	O	S		
	0.961.0178	mixed steel - moplen body main brush											O	S
		0.107.0002	Tubular battery Pb-acid - 12V 118Ah C5		O1	O1	O2							
	0.107.0063	GEL Battery - 12V 105Ah C5		O1	O1	O2								
	0.107.0004	Tubular battery Pb-acid - 6V 180Ah C5		O2	O2			O4	O4	O4				
	0.107.0072	GEL Battery - 6V 180Ah C5		O2	O2			O4	O4					
		0.108.0001	LWS 1-12/24V-12A (for battery 0.107.0002-0.107.0063)		O	O	O							
	0.108.0002	LWS 2-12/24V-25A (for battery 0.107.0004-0.107.0072)		O	O			O	O	O				

(1)-(2)= n° batteries



GV is suitable to degrease and sanitize any object or surface in an easy, ecological and definitive way.

GV range is made up of electric generators, vacuum steam generators, vacuum steam generators with foam system, diesel steam generators and UPDS units producing saturated steam. Ideal for food and baking industry, for private and institutional use, for pharmaceutical and mechanical industry, for dairy factories, for building sectors and so on.

Performances: temperature, steam production and pressure

The same remarks about pressure and delivery rate made for high-pressure cleaners, have to be taken into consideration also for steam generators; in this case, the important difference is the physical relationship (and so not subjective or debatable) that exists between steam pressure and its temperature: to a fixed pressure values correspond right and univocal temperature. Knowing these values it is easy to identify the ones (like us) who show the right double relation between pressure and temperature.

Outlet steam temperature (not boiler temperature, that is higher)

is important because there are natural limits (about 140°C) under which it is not possible to talk about sanitification and so the purpose that led to the machine purchase (clearly wrong) could be unattended.

Is it better a steam generator or a hot water high-pressure cleaner?

As far as the choice is concerned, the aspects to be considered are the analysis of the task that must be done and all the elements that make up the cost of the operation, i.e. working speed (labour cost) and (more and more important) waste treatment (waste disposal cost).

As far as the working speed is considered, it is important the whole cleaning procedure and not only the effective washing time: with the high-pressure cleaner it is not possible an indoor washing, unless there is a filled in collection system, instead it is necessary to move the washing phase outside; with the steam generator it is not necessary to move outside, it is possible to wash the part exactly where it is, because the water generated can be easily dried.

Steam at 180°C allow to degrease dirt also without the use of heavy chemical products. If they are necessary to speed up the washing task, it is very important to consider the cost of draining away dirty water.

The danger of chemical products used is generally proportional to the effectiveness against increasing dirt tenacity.

If we wash with the high-pressure cleaner we produce from 10 to 21 litres of polluted water, that must be collected and drained following the current regulation: in a single wash of a couple of hours 2,5 tons of dirty water is produced!

If we wash with a steam generator, the most powerful machine produces 37 litres per hour, with the most part of the liquid that evaporates, with a two hour wash the remaining dampness and disinfecting product is very low!

Analyzing all these subjects it is clear that in particular circumstances (lack of purification plant for water treatment), the steam generator is more advantageous of a high-pressure cleaner.

On the other side, rinsing speed is the consequence to the delivery rate that hits dirt, so if only the washing phase is considered, high-pressure cleaner is faster.

Steam can be considered water with a related dampness very, very low (superheated steam is just hot air and it doesn't have a significant mechanical action...), with an outlet temperature much higher (180°C) than a high-pressure cleaner: this means that the mechanical power is lower than the one of water, but the degreasing power of steam is much higher.




REGULATOR

• Temperature regulator:

The temperature is set-up by an electronic regulator: it allows to obtain damp steam (low temperature) if our application needs a stronger kinetic energy; or saturated steam if the application needs a little water waste on the surface.

A lower temperature produces a set lower working pressure accordingly to the steam physic law.



• Discharge valve:

Allows a complete discharge of the boiler (not possible even through gun use). In this way it is possible to remove water and limestone residual inside the boiler and from the coil surface.

This valve maybe opened only when the boiler is not hot, and it is recommended to accomplish regularly.



• Unlimited autonomy:

The boiler is refilled by a water pump that gets water from an external water tank. This system allows an unlimited autonomy, because it is not necessary to turn off the steam generator and wait a lower temperature to refill with water.

An automatic control recharges the boiler when necessary. In some models there is an acoustic signal advising about low water level inside the water tank.



• Integrated vacuum:

Dirt is vacuumed inside a tank integrated in the machine



CHARGER

• Integrated battery charger

Some models are equipped with integrated battery charger, other ones have the predisposition only. It is possible to charge batteries in different rooms, without coming back to the same place.



• Integrated battery

Standard integrated battery is built with a maintenance free technology and it does not require restrictions about the place for battery charging. The non stop research allow to use always up-to-date batteries that combined with appropriate battery charger grant machine top performances.



• Multipurpose washable filter

It combines all the advantages of the cartridge filter but with the plus that it can vacuum both dry and wet at the same time. It can be washed with tap water.



• Foam system:

the machine is equipped with connection for compressed air and pressure gauge for foam cleaning. Using the lance with the hose a thick foam can be produced that will stay on the dirty components, giving more effectiveness to the detergent.



• Linear pump:

The movement of the (3) pistons occur through a system of connecting rods and crankshaft. The longitudinal axle of the pistons (placed at the same level or linear) is perpendicular to the motor rotation axle. It is more versatile to bear high delivery rates (from 21 l/min) and it has a better self priming.



• Motor low rotation speed:

The electric motor transfers the same number of revolutions to the pump. With a 4 poles motor there is a lower rotation speed of the components (1450 RPM in case of 50Hz or 1750 RPM in case of 60 Hz) granting longer pump life. Extending lifetime solution.



GV Kone

GV Egon VAC

GV Etna 4000

GV Etna 4000 FOAM

GV Katla

GV 3,3 M plus

GV 8 T plus

Code	Model	Page	Absorbed power	Suction motor	Max. pressure	Steam production	Max. Temperature	Heating and activation time required	Water tank capacity	Detergent tank capacity	Packaging dimensions mm L x l x h	Packaging weight kg	Packaging weight lbs	Pieces for pallet n°
			W	W	bar	Kg/h	°C	min	l	l				
8.404.0051	GV KONE	166	2300	-	4	2,6	143	10	2,4	-	470x330x350	8	17,64	25
8.406.0015	GV Egon VAC	168	1900	1200	5	2,3	152	2	1,2	-	550x400x500	14	30,86	16
8.451.0101	GV ETNA 4000	170	3000	1100	7	3,25	165	4	5	5	750x600x1030	42,5	93,69	4
8.451.0108	GV ETNA 4000 FOAM	172	3000	1500	7	3,25	165	4	5	5	750x600x1030	42,5	93,69	4
8.453.0001	GV KATLA	174	3300	-	9	4,62	175	7	5	5	750x600x700	31	91,27	10
8.450.0010	GV 3.3M PLUS	176	3300	-	9	4,62	175	7	5	5	595x435x650	37	81,57	2
8.458.0001	GV 8 T PLUS	178	8000	-	9	13,50	175	6	10	5	595x435x650	40	88,18	2
8.452.0002	GV VESUVIO 18	180	18000	-	10	26,50	180	7	25	5	1300x780x1080	134	295,41	1
8.452.0001	GV VESUVIO 30	180	30000	-	10	44,50	180	7	25	5	1300x780x1080	134	295,41	1





GV Vesuvio

UPDS Fuji
(Ultra pressure dry steamer)

GV Metis
(Diesel steam generator)

GV Kolumbo
(Diesel steam generator)

Graffiti Waster
(Diesel steam generator)

Code	Model	Page	Absorbed power	Suction motor	Max pressure	Steam production dry/wet	Max temperature	Heating and activation time required	Water tank capacity	Detergent tank capacity	Packaging L x l x h	Packaging weight	Packaging weight	Pieces for pallet
			W	W	bar	Kg/h	°C	min	l	l		mm	kg	lbs
8.455.0001	UPDS FUJI	182	3000	-	10	50/90	178	5	18	-	1130x710x1110	130	242,50	1
8.457.0001	GV METIS	184	350	-	10	50/90	178	5	18	-	1130x710x1110	110	286,60	1
8.628.0006	GV KOLUMBO	186	350	-	10	50/90	178	5	25	25	1300x780x1080	140	308,64	1
8.628.0025	GV KOLUMBO cordless	186	350	-	10	50/90	178	5	25	25	1300x780x1080	140	308,64	1
8.628.0017	GV KOLUMBO 2 Ways	186	350	-	10	50/90	178	5	25	25	1300x780x1080	140	308,64	1
8.628.0027	GRAFFITI WASTER	188	350	-	10	50/90	178	5	25	25	1300x780x1080	166	265,97	1



GV Kone

NEW



Equipped with:

- Saturated steam at 4 bar at a temperature of 143°C • Boiler 2,3 kW • Heating and activation time required: 10 min • Pressure switch • Double thermostat
- Cap with protection against anti-unscrewing and safety valve • Handy accessory compartment with electric cable holder • Control panel with lamps
- Impact resistant covers • Steam regulation • Thermometer • Power cable 6 m.

Standard equipment:

- Hose 2,8 m



- 2x 6.402.0078



- 6.402.0003



- 6.402.0004



- 6.402.0006



- 6.402.0005



- 6.402.0040



- 6.402.0009



- 3.099.1053



- 3.099.1052



- 3.099.0126



- 3.099.0189



- 0.010.0028 Antiscale sachet 50gr

GV Kone

Code	8.404.0051
Max steam pressure/temperature	4 bar / 143° C
Boiler absorbed power	2300 W / 220-240V ~ 50Hz
Steam production	80 kg/h max
Boiler type/volume	Alluminium/2,4 l



Lavor PRO steam cleaner GV Kone sanitizes and sterilizes every surface with steam power, without using detergents or disinfectants. GV Kone is environmental friendly.

Steam regulation allows washing adjusting considering the surface to be treated: in this way every kind of surface has the right treatment.



The machine is user friendly and has a wide range of accessories: GV Kone is a comfortable and safe daily working tool.

Steam cleaning function is perfect in shops, premises, offices as well as in household application and removes the toughest and hidden dirt while eliminating mites, germs and bacteria.



GV Egon VAC

NEW



Standard Equipment

- 5.211.0090 
- 3.753.0127 
- 6.402.0071 
- 3.754.0204 
- 3.754.0121 
- 3.754.0256 
- 3.754.0255 
- 3.754.0005 
- 3.754.0271 
- 3.754.0196 
- 3.754.0215 
- 3.754.0197 
- 3.754.0109 
- 3.754.0108 
- 3.754.0110 
- 3.754.0257 
- 6.402.0105 
- 3.752.0123 
- 3.754.0175 
- 3.099.1108 

Equipped with:

- ABS body • Ready steam warning lamp • Boiler 1,9 kW S.S. AISI 304 • Low level water lamp indicator • Boiler is refilled continuously • Washable filter • Flex hose 2 m • Recovery tank capacity 8 l • Steam regulation • Wheels suitable for use in food processing area • ON/OFF main switch with indicator lamp • ON/OFF boiler switch with indicator lamp • Water filter • Pressure gauge.

TUV certified for professional use

	GV Egon VAC
Code	8.406.0015
Max steam pressure/temperature	5 bar / 152° C
Boiler absorbed power	1900 W / 220/240V ~ 50Hz (Ph 1)
Vacuum motor absorbed power	1200 (max 1400) W
Column depression/Air flow	24 kPa / 220 m³/h
Recovery tank capacity	8 l



GV Egon VAC allows, simply and quickly and with the exclusive use of water, steam cleaning of all surfaces together with dust and liquid vacuuming. It is possible to clean and sanitize all surfaces (ceramic, stainless steel, glass, wood, linoleum, marble, carpet, armchairs and sofas) with high temperature steam, removing mites, germs, bacteria and prevent the onset of allergies.

High pressure stainless steel boiler with unlimited autonomy, ready in a few moments and complete with a wide set of accessories.

Silent operation in sensitive and crowded areas, just setting the suction power on the gun.

Thanks to the water filter it is possible to empty dirt water tank in a few seconds, no need of paper collector filters.

No more waiting for the boiler to cool down, it can be safely refilled, even while you are using it.

Set the boiler, choose the steam intensity. All the controls are on the handle, press the lever to steam, press the button to vacuum.



With high efficiency suction and the electronic control, it is possible to set vacuum power on the gun and to vacuum steam melted with dirt.

It is possible to vacuum dust and liquids with a 4 stage filtering system by adding, optionally, filtering water for greater filtration efficiency.

Fields of applications

Steam system:

Hospitality, community & healthcare (hospitality, buildings cleaning, spa & sport, education & community, healthcare).

Food & beverage (food industry, catering, beverage, winery).

Industry (industry, transportation, car washers, car dealers).



GV Etna 4000

NEW



**NO-STOP
REFILLING**



WASHABLE

Standard equipment:

- 5.211.0068 Hose 4 m (mod. GV Etna 4000)
- 5.211.0085 Hose 4 m (mod. GV Etna 4000 FR)



- 5.209.0151 Hose 2 m



- 3.753.0085



- 3.754.0195



- 3.754.0005



- 3.754.0192



- 3.754.0109



- 3.754.0108



- 3.754.0110



- 6.405.0239



- 3.754.0194



- 3.754.0215



- 3.754.0196



- 3.754.0197



- 3.754.0204




- 3.754.0260



- 3.754.0271



- 5.212.0021



- 4.408.0454 - Sponge accessory

Equipped with:

- Stainless steel body AISI 304 • Ready steam warning lamp • Boiler 3 kW S.S. AISI 304 - Thickness 25/10 • Low level water lamp indicator • Boiler is refilled continuously • Switch for using chemicals and detergents mixed with steam • Device for cleaning hot water mixed with steam • Washable filter • Flex hose 4 m • Recovery tank capacity 64 l • Drain hose system • Steam regulation • Wheels suitable for use in food processing area • Blower system available • ON/OFF main switch with indicator lamp • ON/OFF boiler switch with indicator lamp • Boiler capacity 4 litres.



Watch the video on youtube:
www.youtube.com/lavorpro

	GV Etna 4000	GV Etna 4000 FR
Code	8.451.0101	8.451.0110
Max steam pressure/temperature	7 bar / 165° C	7 bar / 165° C
Boiler absorbed power	3000 W / 230V ~ 50Hz (Ph 1)	3000 W / 230V ~ 50Hz (Ph 1)
Vacuum motor absorbed power	1200 W	1200 W
Column depression/Air flow	20.39 kPa / 220 m³/h	20.39 kPa / 220 m³/h
Water tank/detergent tank capacity	5 l / 5 l	5 l / 5 l



New simple and intuitive control panel, quick-coupling steam gun, main ON/OFF switch with lamp, boiler ON/OFF switch with lamp, steam/detergent regulator/selector, steam flow rate regulator, steam ready warning lamp, low level water indicator lamp with buzzer, steam pressure gauge. Gun with integrated start-up control, adjustment of the vacuum power and steam function activation key.

Unlimited autonomy thanks to the continuous power supply of the boiler, which enables water top-ups in the tank without having to stop the machine or interrupt work. Hot air output blow function for quick drying of car interiors with a 2 m flexible hose and flat nozzle supplied. Discharge pipe to quickly drain dirty water collected without removing the head. Two-stage bypass vacuum motor with cyclone effect.



Equipped with 3 pumps: boiler, detergent and water. Maximum safety thanks to the 2 safety thermostats, 1 pressure switch and 1 mechanical maximum pressure valve.

Fields of applications

Steam system: Food & beverage (food industry, catering, beverage, winery).
Hospitality, community & healthcare (hospitality, buildings cleaning, spa & sport, education & community, healthcare).
Industry (industry, transportation, car washers, car dealers).



GV Etna 4000 FOAM



**NO-STOP
REFILLING**



WASHABLE

**FOAM
SYSTEM**

Standard equipment:

- 5.211.0068 Hose 4 m



- 5.209.0151 Hose 2 m




- 3.753.0085



- 3.754.0195



- 3.754.0005



- 6.402.0106



- 6.402.0113



- 6.405.0239



- 3.754.0194



- 3.754.0215



- 3.754.0196



- 3.754.0197



- 3.754.0204




- 3.754.0260



- 3.754.0271



- 5.212.0021



- 4.408.0454 - Sponge accessory

- 3.697.0072 1l. LC prefoam

Equipped with:

- Stainless steel body AISI 304
- Ready steam warning lamp
- Boiler 3kW S. S. AISI 304 - Thickness 25/10
- Low level water lamp indicator
- Boiler is refilled continuously
- Switch for using chemicals and detergents mixed with steam
- Device for cleaning hot water mixed with steam
- Washable filter
- Flex hose 4 m
- Recovery tank capacity 64 l
- Drain hose system
- Steam regulation
- Wheels suitable for use in food processing area
- Blower system available
- ON/OFF main switch with indicator lamp
- ON/OFF boiler switch with indicator lamp
- Boiler capacity 4 litres.



Watch the video on youtube:
www.youtube.com/lavorpro

GV Etna 4000 Foam	
Code	8.451.0108
Max steam pressure/temperature	7 bar / 165° C
Boiler absorbed power	3000 W / 230V ~ 50Hz (Ph 1)
Vacuum motor absorbed power	1500 W
Column depression/Air flow	24,7 kPa / 224 m³/h
Water tank/detergent tank capacity	5 l / 5 l



New simple and intuitive control panel, quick-coupling steam gun, main ON/OFF switch with lamp, boiler ON/OFF switch with lamp, steam function/compressed air function selector, water/detergent selector, steam flow rate regulator, steam ready indicator lamp, low water level indicator lamp with buzzer, steam pressure gauge, and air pressure gauge. Gun with integrated start-up control, adjustment of the vacuum power and

steam/foam function activation key.

Multipurpose machine: cleaning with detergent, steam, steam with detergent, foam and hot water. Equipped with a compressed air connection and pressure gauges for air and steam.

Unlimited autonomy of steam thanks to the electronically controlled power supply of the boiler, which enables water top-ups in the tank without having to stop the machine or interrupt work.



Hot air output blow function for quick drying of car interiors with a 2 m flexible hose. Discharge pipe to quickly drain dirty water from the tank. Two-stage bypass vacuum motor. Equipped with 3 pumps: boiler, detergent and water. Maximum safety thanks to the 2 safety thermostats, 1 pressure switch and 1 mechanical maximum pressure valve + 11 LC prefoam.

Fields of applications

Steam system: Food & beverage (food industry, catering, beverage, winery).

Hospitality, community & healthcare (hospitality, buildings cleaning, spa & sport, education & community, healthcare).

Industry (industry, transportation, car washers, car dealers).

Foam system: Car dealers, car washers, garages, car body shops, and every other place where a source of compressed air is already available



GV Katla



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- Saturated steam at 9 bar at a temperature of 175°C • Steam gun with low tension control • S. S. body AISI 304 • Boiler 3,3 kW S. S. AISI 304. Thickness 25/10
- Low level water lamp indicator • Device for using chemicals and detergents mixed with steam • Heating and activation time required: 7 min. • Steam regulation
- Discharge valve • Pressure gauge • The boiler can be refilled from the tank provided (continuous duty) • Wheels suitable for food and processing areas
- Storage basket.

Standard equipment:

- 5.409.0256 Hose 3 m 
- 3.753.0111 
- 3.754.0228 
- 3.754.0229 
- 3.754.0235 
- 3.754.0250 
- 3.754.0230 
- 6.405.0240 
- 6.402.0096 
- 3.754.0234 
- 6.402.0095 
- 3.099.0126 

Optional

- 5.409.0254 Steam gun with hose (10 m)

GV Katla

Code	8.453.0001
Max steam pressure/temperature	9 bar / 175° C
Boiler absorbed power	3300 W / 230V ~ 50Hz (Ph 1)
Steam production	4,62 kg/h
Boiler type/volume	Inox AISI 304 / 4 l
Water tank/detergent tank capacity	5 l / 5 l



Simple and intuitive control panel, quick-coupling steam gun, main ON/OFF switch with lamp, boiler ON/OFF switch with lamp, water/detergent selector, steam flow rate regulator, steam ready indicator lamp, low water level indicator lamp with buzzer, steam pressure gauge. Steam gun with integrated steam/detergent function activation key and quick coupling of accessories.

Unlimited autonomy thanks to the continuous power supply of the boiler, which enables water top-ups in the tank without having to stop the machine or interrupt work, with major time saving in the operating phase. Boiler with saturated steam at 9 bar at a temperature of 175°C. Equipped with 3 pumps: boiler, detergent and water. Maximum safety thanks to the 1 safety thermostat, 1 pressure switch and



1 mechanical maximum pressure valve. Discharge valve for complete discharge of the boiler; it eliminates water residues and formation of lime scale, thus lengthening the lifespan of the boiler. A 5-litre water and detergent double tank. A rich and complete range of accessories is supplied. Fieldswater and scale growth, extending boiler's life.


Fields of applications

Steam system:

Food & beverage (food industry, catering, beverage, winery).
 Hospitality, community & healthcare (hospitality, buildings cleaning, spa & sport, education & community, healthcare).
 Industry (industry, transportation, car washers, car dealers).



GV 3,3 M plus



Standard equipment:

- 5.409.0256 Hose 3 m 
- 3.753.0111 
- 3.754.0228 
- 3.754.0229 
- 3.754.0235 
- 3.754.0250 
- 3.754.0230 
- 6.405.0240 
- 6.402.0096 
- 3.754.0234 
- 6.402.0095 
- 3.099.0126 



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- Saturated steam at 9 bar at a temperature of 175°C
- Steam gun with low tension control
- Made of AISI 304 stainless steel
- Boiler 3,3 kW S. S. AISI 304. Thickness 25/10
- Heating and activation time required: 7 min.
- Steam regulation
- Discharge valve
- Pressure gauge
- Device for using chemicals and detergents mixed with steam
- The boiler can be refilled from the tank provided (continuous duty)
- Pivoting wheels with brakes, suitable for use in food processing areas.

Optional:

- 5.409.0254 Steam gun with hose (10 m)

GV 3,3 M PLUS

Code	8.450.0010
Max steam pressure/temperature	9 bar / 175° C
Boiler absorbed power	3300 W / 230V ~ 50Hz (Ph 1)
Steam production	4.62 kg/h
Boiler type/volume	Inox AISI 304 / 4 l
Water tank/detergent tank capacity	5 l / 5 l



Simple and intuitive control panel, quick-coupling steam gun, main ON/OFF switch with lamp, boiler resistance activation lamp, steam flow rate regulator, steam ready indicator lamp, steam pressure gauge. Steam gun with integrated steam/detergent function activation key and quick coupling of accessories. Boiler no water safety stop sensor. No water and water tank full lamp. Water pump activation lamp. Detergent pump activation lamp. Water/detergent selector key.

Boiler draining key.

Unlimited autonomy thanks to the continuous power supply of the boiler, which enables water top-ups in the tank without having to stop the machine or interrupt work, with major time saving in the operating phase. Boiler with saturated steam at 9 bar at a temperature of 175°C.

Equipped with 2 pumps: boiler and detergent. Maximum safety thanks to the 1 safety thermostat, 1 pressure switch and 1



mechanical maximum pressure valve. Discharge valve for complete discharge of the boiler; it eliminates water residues and formation of lime scale, thus lengthening the lifespan of the boiler. Equipped with 4 pivoting wheels suitable for food environments. A 5-litre water and detergent double tank. A rich and complete range of accessories is supplied.

Fields of applications

Steam system:

Steam system: Food & beverage (food industry, catering, beverage, winery).

Hospitality, community & healthcare (hospitality, buildings cleaning, spa & sport, education & community, healthcare).

Industry (industry, transportation, car washers, car dealers).



GV 8 T plus



NEW

**NO-STOP
REFILLING**



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- Built-in AISI 304 stainless steel
- Pivoting wheels with brakes, suitable for use in food processing areas
- The boiler can be refilled from the tank provided (continuous duty)
- Discharge valve
- Pressure gauge
- Device for using chemicals and detergents mixed with steam
- Heating and activation time required: 6 min.
- Control with low tension controls
- Control panel: ON-OFF main switch, indicator lamp,
- Saturated steam at 9 bar at a temperature of 175°C.

Standard equipment:


- 6.402.0080
Hose 3,5 m



- 6.402.0082



- 6.402.0081



- 6.402.0083



- 6.405.0207



- 6.402.0046



- 6.402.0069



- 4.407.0033 Steam nozzle

Optional:

- 6.402.0087 Steam gun with hose (6 m)
- 6.402.0085 Steam gun with hose (10 m)
- 6.402.0092 Straight lance mm 750 without nozzle
- 6.405.0197 Coupling for tanks Ø 40
- 6.402.0094 Extension 650 mm
- 6.402.0097 Lance with flat nozzle
- 6.402.0098 Brass bristles brush Ø 80
- 6.402.0112 Lance for barrel

GV 8 T plus

Code	8.458.0001
Max steam pressure/temperature	9 bar / 175° C
Boiler absorbed power	8000 W / 400V ~ 50Hz (Ph 3)
Steam production	13,50 kg/h
Boiler type/volume	Inox AISI 304 / 5 l
Water tank/detergent tank capacity	10 l / 5 l



Simple and intuitive control panel, quick-coupling steam gun, main ON/OFF switch with lamp, boiler resistance activation lamp, steam flow rate regulator, steam ready indicator lamp, steam pressure gauge. Steam gun with integrated steam/detergent function activation key and quick coupling of accessories. Boiler no water safety stop sensor. No water and water tank full lamp. Water pump activation lamp. Detergent pump activation lamp. Water/detergent selector key.

Boiler draining key.

Unlimited autonomy thanks to the continuous power supply of the boiler, which enables water top-ups in the tank without having to stop the machine or interrupt work, with major time saving in the operating phase. Boiler with saturated steam at 9 bar at a temperature of 175°C.

Equipped with 2 pumps: boiler and detergent. Maximum safety thanks to the 1 safety thermostat, 1 pressure switch and 1



mechanical maximum pressure valve. Discharge valve for complete discharge of the boiler; it eliminates water residues and formation of lime scale, thus lengthening the lifespan of the boiler. Equipped with 4 pivoting wheels suitable for food environments. A 10l water and 5l detergent double tank. A rich and complete range of accessories is supplied.

Fields of applications

Steam system:

Steam system: Food & beverage (food industry, catering, beverage, winery).

Hospitality, community & healthcare (hospitality, buildings cleaning, spa & sport, education & community, healthcare).

Industry (industry, transportation, car washers, car dealers).





REGULATOR



NO-STOP REFILLING

GV Vesuvio



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

- Built-in AISI 304 stainless steel
- Pivoting wheels with brakes, suitable for use in food processing areas
- The boiler can be refilled from the tank provided (continuous duty)
- Temperature regulator
- Discharge valve
- Pressure gauge
- Device for using chemicals and detergents mixed with steam
- Heating and activation time required: 6 min.
- Control with low tension controls
- Control panel: ON-OFF main switch, indicator lamp, thermoregulator, boiler activating key, gun activating key
- Timer cycle.

Standard equipment:


- 6.402.0080
Hose 3,5 m



- 6.402.0082



- 6.402.0081



- 6.402.0083



- 6.405.0207



- 6.402.0046



- 6.402.0069



- 4.407.0077 Steam nozzle (GV Vesuvio 18)
- 4.407.0079 Steam nozzle (GV Vesuvio 30)

Optional:

- 6.402.0087 Steam gun with hose (6 m)
- 6.402.0085 Steam gun with hose (10 m)
- 6.402.0093 Steam gun with hose (15 m)
- 6.402.0090 Steam gun with hose (20 m)
- 6.402.0092 Straight lance mm 750 without nozzle
- 6.405.0197 Coupling for tanks Ø 40
- 6.402.0094 Extension 650 mm
- 6.402.0097 Lance with flat nozzle
- 6.402.0098 Brass bristles brush Ø 80
- 6.402.0112 Lance for barrel

	GV Vesuvio 18	GV Vesuvio 30
Code	8.452.0002	8.452.0001
Max steam pressure/temperature	10 bar / 180° C	10 bar / 180° C
Boiler absorbed power	18000 W / 400V ~ 50Hz (Ph 3)	30000 W / 400V ~ 50Hz (Ph 3)
Steam production	26.5 kg/h	44.5 kg/h
Boiler type/volume	Inox AISI 304 / 18 l	Inox AISI 304 / 18 l
Water tank/detergent tank capacity	25 l / 5 l	25 l / 5 l



Simple and intuitive control panel, quick-coupling steam gun, main ON/OFF switch, activation lamp, electronic regulator of the temperature with digital display, low water level display with buzzer, boiler activation key, gun activation key, steam pressure gauge, steam selector and detergent selector. Steam gun with integrated steam/detergent function activation key and quick coupling of accessories. Timer cycle. Unlimited autonomy thanks to the continuous power supply

of the boiler, which enables water top-ups in the tank without having to stop the machine or interrupt work, with major time saving in the operating phase. Boiler with saturated steam at 10 bar at a temperature of 180°C.

Equipped with 2 pumps: detergent and water. Maximum safety thanks to the 2 level controls, 1 thermostat, 1 pressure switch and 1 mechanical pressure valve. Discharge valve for complete discharge of the boiler; it eliminates water residues



and formation of lime scale, thus lengthening the lifespan of the boiler. Double tank: 25 litres for water and 5 litres for detergent. Equipped with 2 pivoting wheels and appropriate brake to use in food environments + 2 fixed wheels. A rich and complete range of accessories is supplied with practical accessory holders.

Fields of applications

Steam system:

Steam system: Food & beverage (food industry, catering, beverage, winery).

Hospitality, community & healthcare (hospitality, buildings cleaning, spa & sport, education & community, healthcare).

Industry (industry, transportation).





REGULATOR



NO-STOP REFILLING



**NEW
CLEANING
SYSTEM**

2 in 1
Dry steam
+
high pressure



CRANKSHAFT

UPDS Fuji



Watch the video on youtube:
www.youtube.com/lavorpro

Equipped with:

Steam: Vertical burner with high thermal efficiency steel coil. Auxiliary motor for burner. Discharge valve: allows a complete discharge of the boiler. Temperature regulator: the temperature is set up by an electronic regulator. Steam pressure gauge. Temperature regulator. Low fuel lamp. Double pipe gasoil pump. User friendly control panel. Unit can be continually refilled. Safety solenoid valve. Device for cleaning hot water mixed with steam.

High pressure water: Three ceramic coated pistons brass linear pump head with built-in by-pass valve.

Standard equipment



- 6.402.0102 - Steam gun with hose (10 m)



- 6.402.0082 - Steam lance



- 6.402.0110 - Steam/High pressure lance

- 4.407.0079 - Steam nozzle G 1/8 d = 3,75



- 3.103.0050 - High pressure nozzle 045



Optional:

- 6.402.0103 Steam gun with hose (15 m)
- 6.402.0104 Steam gun with hose (20 m)



- 6.405.0207
Kit 3 brushes



- 6.402.0069
Glass wiper



- 6.402.0046
Black plastic scraper l. 50

- 6.402.0112 Lance for barrel

	UPDS Fuji
Code	8.455.0001
Operat. pressure	120 bar (150 bar max)
Delivery rate max	660 l/h
Max steam pressure/temperature	10 bar / 178° C
Absorbed power	3000 + 350 W / 230V ~ 50Hz (Ph 1)
Steam production dry/wet	50/90 kg/h
Burner type/fuel consumption	Diesel / 2,83 l/h
Fuel tank capacity	18 l



Ultra Pressure Dry Steamer: a new revolutionary cleaning system.

The advantages of two cleaning systems are combined into one single product. An innovative cleaning system that combines the mechanical force of high-pressure water with the degreasing and disinfecting force of dry steam. Equipped with a 18 liters diesel tank, which makes the high pressure cleaning autonomous. A professional steam generator integrated with a cold

water high-pressure cleaner, dual use for multiple applications in an all-in-one product.

With the cold water high pressure cleaner, which uses the mechanical force of the high pressure, you can quickly remove coarse and superficial dirt.

Thanks to the use of detergents is then possible to act effectively on all kinds of dirt and on all surfaces.

With the degreasing and sanitizing strength of dry steam it is



possible to remove even the more aggressive dirt, allowing to clean car rims, the engine compartment, interior parts, floor mats.

Ideal for: Cleaning and sanitising car interiors, street furniture, playgrounds, removing chewing gum, degreasing mechanical parts in general, etc.

Fields of applications

Steam system:

Steam system: Food & beverage (food industry, catering, beverage, winery).

Hospitality, community & healthcare (hospitality, buildings cleaning, spa & sport, education & community, healthcare).

Industry (industry, transportation).





NEW



Watch the video on youtube:
www.youtube.com/lavorpro

Metis

Standard equipment:

- 6.402.0102
Hose 10 m



- 6.402.0082



- 6.405.0207



- 4.407.0079 Steam nozzle

Optional:

- 6.402.0103 Steam gun with hose (15 m)
- 6.402.0104 Steam gun with hose (20 m)
- 6.402.0092 Lance mm 750 without nozzle
- 6.402.0081 Lance mm 175 without nozzle
- 6.402.0083 Lance mm 425 without nozzle
- 6.402.0046 Black plastic scraper l. 50
- 6.402.0069 Glass wiper
- 6.405.0197 Coupling for tanks Ø 40
- 6.402.0094 Extension 650 mm
- 6.402.0097 Lance with flat nozzle
- 6.402.0098 Brass bristles brush Ø 80
- 6.402.0112 Lance for barrel

Equipped with:

- Vertical burner with high thermal efficiency steel coil
- Auxiliary motor for burner
- Discharge valve: allows a complete discharge of the boiler
- Temperature regulator: the temperature is set-up by an electronic regulator
- Steam pressure gauge
- Low fuel indicator
- Double pipe gasoil pump
- User-friendly control panel
- Unit can be continually refilled
- Provided with 2 outputs for simultaneous work of two different operators.

	Metis
Code	8.457.0001
Max steam pressure/temperature	10 bar / 178° C
Absorbed power	350 W / 230V ~ 50Hz (Ph 1)
Steam production dry/wet	50/90 kg/h
Burner type/fuel consumption	Diesel / 2,83 l/h
Water tank/fuel tank capacity	18 l / 18 l



Metis is a portable steam generator with a diesel fuel boiler. Unlimited autonomy thanks to no-stop water tank refilling. It does not leave any residues after cleaning. Metis water saving (over 90%) compared to normal high-pressure systems. Allows sanitisation tasks thanks to the combined use of steam and pressure. The operator does not require special protective overalls and protective masks. Provided with 2 outputs for simultaneous work of two different operators.

Portability: it does not need to be connected neither to the water supply because it is equipped with a water tank.

It is easy to move around, easy to use, and ready to use.

The advantages compared to normal high-pressure washing:

- Ecological: It consumes very little water (90% less than normal high-pressure cleaners) and does not require connection to the water supply.




- It does not require a collection tank to dispose of water reflux.
- Thanks to the high temperature that degreases and dissolves dirt, no polluting chemical products are required.
- Easy to use where required, it does not require connection to the water supply, the operator does not require special work clothing, excess water is not wasted.
- Ideal for maintenance cleaning and makes the bodywork of your car or motorbike shine without the risk of damaging it with the mechanical action of the high-pressure water.

Ideal for: Eliminating stubborn grease and dirt, leaving surfaces clean and shining. Cleaning is easy, all you need to do is use the cleaning and degreasing action of the steam at high temperature and collect residues with a microfibre cloth. Glass and delicate surfaces. Car interiors and for the most difficult parts to reach. Quick, thorough cleaning and sanitisation of mats without wetting them.





REGULATOR



Kolumbo




Standard equipment:

- 6.402.0085 Hose 10 m (Kolumbo 2way - Two pieces)



- 6.402.0082 (Kolumbo 2way - Two pieces)



- 6.405.0207 (Kolumbo 2way - Two pieces)



- 4.407.0079 Steam nozzle (Kolumbo/Kolumbo cordless)
- 4.407.0077 Steam nozzle (Kolumbo 2 way)

Only Kolumbo cordless standard on board



Watch the video on youtube:
www.youtube.com/lavorpro

Kolumbo 2way
With double guns
for two operators

Equipped with:

• Vertical burner with high thermal efficiency steel coil • Auxiliary motor for burner • Discharge valve: allows a complete discharge of the boiler • Temperature regulator: the temperature is set-up by an electronic regulator • Steam pressure gauge • Temperature regulator • Low fuel lamp • Integrated detergent tank with detergent delivery controller by the gun • Double pipe gasoil pump • User-friendly control panel • Unit can be continually refilled • Standard with double guns for 2 operators model Kolumbo 2Way code 8.628.0017 • Battery version: Kolumbo Cordless code 8.628.0025 (Battery charger 230 V-50 Hz).

Optional:

- 6.402.0080 Steam gun with hose (3,5 m)
- 6.402.0087 Steam gun with hose (6 m)
- 6.402.0093 Steam gun with hose (15 m)
- 6.402.0090 Steam gun with hose (20 m)
- 6.402.0092 Lance mm 750 without nozzle
- 6.402.0081 Lance mm 175 without nozzle
- 6.402.0083 Lance mm 425 without nozzle
- 6.402.0046 Black plastic scraper l. 50
- 6.402.0069 Glass wiper
- 6.405.0197 Coupling for tanks Ø 40
- 6.402.0094 Extension 650 mm
- 6.402.0097 Lance with flat nozzle
- 6.402.0098 Brass bristles brush Ø 80
- 6.402.0112 Lance for barrel

	KOLUMBO	KOLUMBO CORDLESS	KOLUMBO 2way
Code	8.628.0006	8.628.0025	8.628.0017
Max steam pressure/temperature	10 bar / 178° C	10 bar / 178° C	10 bar / 178° C
Absorbed power	350 W / 220/230V ~ 50/60Hz (Ph 1)	350 W / 1 x 12 DC 75 Ah C5	350 W / 220/230V ~ 50/60Hz (Ph 1)
Steam production dry/wet	50/90 kg/h	50/90 kg/h	50/90 kg/h
Burner type/fuel consumption	Diesel / 2,83 l/h	Diesel / 2,83 l/h	Diesel / 2,83 l/h
Water tank/fuel tank capacity	25 l / 25 l	25 l / 25 l	25 l / 25 l



GV Kolumbo is a portable steam generator with a diesel fuel boiler. Unlimited autonomy thanks to no-stop water tank refilling. It does not leave any residues after cleaning. Major water saving (over 90%) compared to normal high-pressure systems. Allows sanitisation tasks thanks to the combined use of steam and detergents. The operator does not require special protective overalls and protective masks.

Portability: it does not need to be connected neither to the water

supply because it is equipped with a water tank, nor to the electrical supply (cordless model) because it has a diesel fuel boiler. It is easy to move around, easy to use, and ready to use. The advantages compared to normal high-pressure washing:

- Ecological: It consumes very little water (90% less than normal high-pressure cleaners) and does not require connection to the water supply.





- It does not require a collection tank to dispose of water reflux.
- Thanks to the high temperature that degreases and dissolves dirt, no polluting chemical products are required.
- Easy to use where required, it does not require connection to the water supply, the operator does not require special work clothing, excess water is not wasted.
- Ideal for maintenance cleaning and makes the bodywork of your car or motorbike shine without the risk of damaging it with the mechanical action of the high-pressure water.

Ideal for: Eliminating stubborn grease and dirt, leaving surfaces clean and shining. Cleaning is easy, all you need to do is use the cleaning and degreasing action of the steam at high temperature and collect residues with a microfibre cloth. Glass and delicate surfaces. Car interiors and for the most difficult parts to reach. Quick, thorough cleaning and sanitisation of mats without wetting them.



Graffiti Waster



Equipped with:


- Vertical burner with high thermal efficiency steel coil
- Auxiliary motor for burner
- Discharge valve: allows a complete discharge of the boiler
- Temperature regulator: the temperature is set-up by an electronic regulator
- Steam pressure gauge
- Temperature regulator
- Low fuel lamp
- Integrated detergent tank with detergent delivery controller by the gun
- Double pipe gasoil pump
- User-friendly control panel
- Unit can be continually refilled
- Battery and battery charger included (Battery charger 230 V-50 Hz).

Standard equipment:

- 6.402.0085
Hose 10 m



- 6.402.0081



- 6.402.0094

- 6.405.0207



- 6.402.0046



- 6.402.0099



- 3.749.0475

- 4.008.0009



- 4.407.0079 Steam nozzle

Optional:

- 6.402.0080 Steam gun with hose (3,5 m)
- 6.402.0093 Steam gun with hose (15 m)
- 6.402.0090 Steam gun with hose (20 m)
- 0.011.0001 Calibrated sand (6 x 5 kg)
- 6.402.0112 Lance for barrel

	Graffiti Waster
Code	8.628.0027
Max steam pressure/temperature	10 bar / 178° C
Absorbed power	350 W / 1 x 12 DC 75 Ah C5
Steam production wet/dry	50/90 kg/h
Burner type/fuel consumption	Diesel / 2,83 l/h
Water tank/fuel tank capacity	25 l / 25 l



PAT. PEND.

What you can do with Graffiti Waster...



Watch the video on youtube:
www.youtube.com/lavorpro



Graffiti Waster is a portable steam generator, equipped with diesel fuel boiler, allowing graffiti and dirt removal in general, thanks to the revolutionary system using steam/sand and steam/detergent mashed together. To remove all types of graffiti away from walls, buildings, floors. To restore and clean statues/monuments. Sandblasting walls and railings. Clean and sand blasting terracotta tiles, roofing tiles and wood. Pickle machineries and surfaces thanks to a combined use of detergents. Unlimited autonomy: thanks to no-stop water tank refilling.

Main plus in comparison to traditional sand blasting systems using air or water:

- It doesn't leave residuals at the end of cleaning task.
- No water waste.
- Noiseless.
- Allows sanitization tasks thanks to the combined use of steam and detergents.
- The operator doesn't need protective overalls and protective masks with filters.
- Lack of hazardous dust that are pulled down by steam.
- With a LAVOR PRO vacuum cleaner it is possible to carry out a deep cleaning of the area at the end of the cleaning task
- Portability: it doesn't need to be connected nor to water supply, because it is equipped with water tank, not to the electrical supply, because it has a diesel fuel boiler.
- Easy to use and always ready to use.
- Easy to move.



In order to complete the chemical products supply and to allow a better applicability and effectiveness, the sprayers are the perfect solution when supply wideness, use versatility and dosage saving are taken into consideration.

They are split into two different categories: pneumatic charge and continuous pneumatic charge.



Pneumatic charge sprayers need to be connected to an air compressor to charge the tank and allow the product vaporization without the connection to the air compressor. They work at high-pressures and so they use capacious steel or stainless steel tanks to allow a greater working autonomy.

Continuous pneumatic foam sprayers need a permanent connection to an air compressor; in this way air mixes with the chemical product producing a soft and voluminous foam that persists on surfaces: with a little chemical product, it is possible to treat wider areas or tough dirt (also on ceilings, inclined and/or slippery walls).

They work at high-pressure and so they use capacious steel or stainless steel tanks to allow a greater working autonomy.

The chemical product spraying is a finishing phase of cleaning task with other machines. The choice of the right product considering the kind of cleaning task grants the best result, complying with the environment and the machine that sprays the chemical product. Our chemical products range has been conceived complying with the strictest rules protecting the environment and avoiding the indiscriminating use of products damaging the environment. The right measuring and respect of the instructions we suggest are the best balance of the economical and technical needs of each up-to-date and aware cleaning task.


Code	Model	Page	Product	Capacity	Recharging	Working pressure	Category	Single packaging weight	Single packaging weight	Single packaging dimensions	Pieces for pallet	Pallet dimensions
				liters		bar		kg	lbs	cm L x l x H	N°	cm L x l x H
6.608.0074	FOAM BOX	191	Foam sprayer	-	Air operating	4	Box	3 kg	9,3	44x13x25	-	-
0.006.0002	SPRAY NV24	192	Sprayer	24	Pneumatic	6	Trolley	17 kg	38	34x34x82	18	102x102x215
0.006.0003	SPRAY NV50	192	Sprayer	50	Pneumatic	6	Trolley	27 kg	60	47x47x107	12	141x107x205
0.006.0007	FOAMJET SV24	193	Foam sprayer	24	Air operating	6	Trolley	17 kg	38	34x34x82	18	102x102x215
0.006.0009	FOAMJET SX24	193	Foam sprayer	24	Air operating	6	Trolley	13 kg	29	34x34x82	18	102x102x215
0.006.0008	FOAMJET SV50	193	Foam sprayer	50	Air operating	6	Trolley	27 kg	60	47x47x107	12	141x107x205
0.006.0010	FOAMJET SX50	193	Foam sprayer	50	Air operating	6	Trolley	20 kg	44	47x47x107	12	141x107x205

Foam box

NEW



Standard equipment:



• 6.402.0109

• 8m hose 3.099.0705



Optional:

3.697.0059 4x5 kg foaming cleanser for commercial vehicles

3.697.0057 4x5 Kg alkaline foaming cleanser for food industry

3.697.0058 4x5 Kg foaming cleanser for hygiene facilities

3.697.0056 4x5 kg foaming cleanser for cloth and carpets

Device for dense foam production and spreading. Easy to install, it requires only compressed air connection and power supply.

Ideal for cleaning: car body, car interiors, bathrooms, kitchens, slaughterhouses, food processing areas, health care settings, cellars.



Foam box	
code	6.608.0074
voltage	220-240V ~ 50Hz
pumps no. - power	2 - 100W
air pressure	4 bar
delivery rate	1 l/m
detergent concentration	4%
dimension/weight	44 x 13 h 25/3 Kg


Spray




Standard accessories:

- Professional gun.
- Lance with nozzle.
- Integrated inlet and outlet quick.
- Chemical use hose and gasket.

Spray 24



Spray 50



Spray: Pneumatic charge sprayers need to be connected to an air compressor to charge the tank and allow the product vaporization without the connection to the air compressor. They work at high-pressures and so they use capacious steel or stainless steel tanks to allow a greater working autonomy.

	SPRAY NV24	SPRAY NV50
code	0.006.0002	0.006.0003
capacity/model	24 l/painted	50 l/painted
working pressure	6 bar	6 bar
safety valve	max 8 bar	max 8 bar
pressure indicator	pressure gauge	pressure gauge
level indicator	external column	external column
recharging	pneumatic	pneumatic
pressure regulator	manual	manual
gun connection	1/4" G-F	1/4" G-F
hose type	rilsan	rilsan
hose / lance length	10 mt / 600 mm	10 mt / 900 mm
dimension / weight	28x32x75 cm / 15 kg - 33,06 lbs	45x42x100 cm / 25 kg - 55,11 lbs


Foamjet




Standard accessories:

- Professional gun.
- Lance with nozzle.
- Integrated inlet and outlet quick.
- Chemical use hose and gasket.

Foamjet 24



Foamjet 50



Continuous pneumatic foam sprayers need a permanent connection to an air compressor; in this way air mixes with the chemical product producing a soft and voluminous foam that persists on surfaces: with a little chemical product, it is possible to treat wider areas or tough dirt (also on ceilings, inclined and/or slippery walls). They work at high-pressure and so they use capacious steel or stainless steel tanks to allow a greater working autonomy.










































	FOAMJET SV24	FOAMJET SX24	FOAMJET SV50	FOAMJET SX50
code	0.006.0007	0.006.0009	0.006.0008	0.006.0010
capacity/model	24 l/painted	24 l/S. S.	50 l/painted	50 l/S. S.
working pressure	6 bar	6 bar	6 bar	6 bar
safety valve	max 8 bar	max 8 bar	max 8 bar	max 8 bar
pressure indicator	pressure gauge	pressure gauge	pressure gauge	pressure gauge
level indicator	external column	external column	external column	external column
recharging	air operating	air operating	air operating	air operating
pressure regulator	manual	manual	manual	manual
gun connection	1/4" G-F	1/4" G-F	1/4" G-F	1/4" G-F
hose type	rilsan	rilsan	rilsan	rilsan
hose / lance lenght	10 mt / 600 mm	10 mt / 600 mm	10 mt / 900 mm	10 mt / 900 mm
dimension / weight	28x32x75 cm / 15 kg - 33,06 lbs	28x32x75 cm / 11 kg - 24,25 lbs	45x42x100 cm / 25 kg - 55,11 lbs	45x42x102 cm / 18 kg - 39,68 lbs

Technology



Fields



MODEL	DESCRIPTION	FIELDS	PROPERTIES	USE:
LCN-800F code 3.697.0023 	FRAGRANCE-FREE SANITISING DETERGENT	S1  S3  S4 	Destroys unpleasant odours, fights the proliferation of bacteria, harmful micro-organisms, fungi and moulds. Contains quaternary ammonium salts.	On all types of hard surface, dilute from 1 to 3%. In the case of tenacious contaminations and aggressive unpleasant odours, dilute up to 6%.
Ph 7.8 - 8.2 1,000 g/ml	 5000 ml x 4 pz.		T1  T2  T3  T5  T7 	
LCN-800 code 3.697.0024 	FRAGRANCE SANITISING DETERGENT	S1  S3  S4 	Destroys unpleasant odours, fights the proliferation of bacteria, harmful micro-organisms, fungi and moulds. Contains quaternary ammonium salts. Leaves a fresh and long-lasting fragrance in the environment.	On all types of hard surface, dilute from 1 to 3%. In the case of tenacious contaminations and aggressive unpleasant odours, dilute up to 6%.
Ph 7.8 - 8.2 1,000 g/ml	 5000 ml x 4 pz.		T1  T2  T3  T5  T7 	
LCN-680AL code 3.697.0025 	ALCOHOLIC MAINTENANCE DETERGENT	S4 	Quick-drying universal neutral detergent. Anti-dust effect for 4-5 days. Leaves a pleasant fragrance in the environment. Does not leave residues.	On all types of washable shiny or hard surface such as glass, stone or ceramic, dilute with water from 0.5% to 1%.
Ph 6,6 - 7,0 1,000 g/ml	 5000 ml x 4 pz.		T1  T3  T5  T7 	
LCN-650 code 3.697.0026 	NON ALCOHOLIC MAINTENANCE DETERGENT	S4 	Universal neutral detergent, does not corrode polymers, natural or synthetic waxes. Leaves a pleasant fragrance in the environment. Does not leave residues.	On all types of washable hard surfaces, even if protected by wax and/or sealants, dilute in water to 0.5%-1%.
Ph 6,3 - 6,7 1,000 g/ml	 5000 ml x 4 pz.		T1  T3  T7 	
LCN-640WM code 3.697.0027 	NON STRATIFYING WAX WASH DETERGENT	S4 	Cleans and shines surfaces. Regenerates protective and wax treatments. Non filmogenous and leaves a pleasant fragrance in the environment.	On all types of washable hard surfaces, including floors protected by wax and/or sealants, dilute in water to 0.5%-1%.
Ph 8,8 - 9,2 1,000 g/ml	 5000 ml x 4 pz.		T1  T2  T3  T5  T7 	

Technology

T1 manual cleaning
 T2 sprayer
 T3 carpet cleaner
 T4 high-pressure cleaner
 T5 steam cleaner
 T6 single disc machine
 T7 floor scrubber-drier

Fields

S1 vehicles
 S2 mechanical industry
 S3 food industry
 S4 building

MODEL	DESCRIPTION	FIELDS	PROPERTIES	USE:
LCB-900WR code 3.697.0030 	FRAGRANCE-FREE WAX REMOVING DETERGENT	S1 S3 S4	Removes any type of wax or polymer (even if old or stratified).	According to the degree of dirt and the thickness of the film, dilute in water from 1% to 10%. In extreme situations, dilute in water up to 20%.
Ph 8,8 - 9,2 1,000 g/ml	5000 ml x 4 pz.		T1 T6 T7	
LCB-740F code 3.697.0031 	ALKALINE MULTIPURPOSE DETERGENT	S1 S2 S3 S4	Dissolves and detaches organic and inorganic dirt.	On all types of hard washable surfaces, ceramic or enamelled surfaces, windows and doors, equipment and industrial machine tools. Dilute in water from 1% to 2%.
Ph (sol. 1%) 6.9 - 7.9 1,000 g/ml	5000 ml x 4 pz.		T1 T2 T4 T7	
LCN-600SVF code 3.697.0033 	SOLVENT DETERGENT OF VEGETABLE ORIGIN	S1 S2 S3 S4	Eliminates tar, rubber, glue and adhesive residues. Removes even stratified (acrylic or polymer) wax films. Disintegrates persistent dirt of animal or mineral origin.	According to the degree of dirt and thickness of the film, dilute in water from 0.5% to 2%.
Ph 5,8 - 6,2 0,950 g/ml	5000 ml x 4 pz.		T1 T2 T5 T6 T7	
LCN-700 code 3.697.0035 	CARPET AND TEXTILE WASH DETERGENT	S1	Removes dirt, regenerates and protects fibres. Does not leave residues and releases a pleasant fragrance.	Dilute in water from 2% to 5%.
Ph 6.8 - 7.2 1,010 g/ml	5000 ml x 4 pz.		T3 T5	



CHEMICAL PRODUCTS FOR DENSE FOAM PRODUCTION

LC 104F

NEW



3.697.0059 4x5 kg



Foaming detergent for commercial vehicles

Monocomponent and alkaline detergent based on selected surfactants with a penetrating and softening action against both organic and inorganic dirt. It acts quickly and permanently, leaves no residue, is easy to rinse, does not alter painted parts made of plastic or rubber. Thanks to its high content of sequestrants, it maintains its detergent power even in the presence of hard water. Suitable for self-service high pressure washing plants, it can also be used in washing systems with nebulizer.

LC 102F

NEW



3.697.0057 4x5 kg



Alkaline foaming cleanser for food industry

Alkaline chloroactive fast-acting product, it cleans and sanitizes the surfaces and the equipment which are treated without leaving any residue. Used with a foaming nebulizer, it produces dense foam which sticks on the walls, enhancing its sanitizing action. Also suitable for floors, workbenches, equipment, etc..., it is used in dairy farms, slaughterhouses, salami factories, oil mills.

LC 103F

NEW



3.697.0058 4x5 kg



Foaming cleanser for hygiene facilities

Concentrated liquid detergent with acid pH. Ideal for cleansing stainless steel surfaces, it is used for cleaning and descaling all the acid-resistant surfaces. It effectively removes scale deposits, ferrous oxides and greasy surface dirt making the surfaces clean and without stains.

LC 101F

NEW



3.697.0056 4x5 kg



Foaming cleanser for cloth and carpets

Product indicated for cleaning car interiors made of fabric and of carpet. Formulated with special suspending additives that have the characteristic of breaking the physical-chemical bonds existing between fiber and dirt, attracting the latter to the surface. These substances also avoid the redeposit of dirt guaranteeing excellent cleaning results. Highly foaming, it has to be used with special extraction vacuum cleaners. It brightens the colors and leaves a pleasant perfume.

GENERAL TERMS OF SALE Goods travel at buyer's risk.

Images and technical specifications of products and accessories
are not binding and can be modified without notice.



Management system certified ISO 9001
for high pressure cleaners designing
and manufacturing.



Watch the video on youtube:
www.youtube.com/lavortv
www.youtube.com/lavorpro

LAVOR PRO



LAVORWASH S.p.A. J.F.Kennedy, 12 - 46020 Pegognaga (MN) Italy - Tel. +39 0376 55431 - Fax +39 0376 558927
E-mail: info@lavorpro.com - WebSite: www.lavorpro.com